

## Accessories

### Repair Kits




REPAIR KIT BQ2-VGN

### Replacement Part Kits

Cat. No.	For Meter Socket	Component*
<b>REPAIR KIT BE1-TCV</b>	BE1-TCV	BS2027, CDA110, BONDLUG2, SCREW-BS1002
<b>REPAIR KIT BQ2-V</b>	BQ2-V	BS2027, BS2611L, BONDLUG2, SCREW-BS2402
<b>REPAIR KIT BQ2-VGN</b>	BQ2-VGN	BS2027, BS2411GN, BONDLUG2, SCREW-BS2402
<b>REPAIR KIT BS2-TCV</b>	BS2-TCV	BS2027, BS2611L, BONDLUG2, SCREW-BS2402
<b>REPAIR KIT BS2-TCVBC</b>	BS2-TCVBC	BS2027, BS2611L, NA75Z-3, SCREW-BS2402
<b>REPAIR KIT M02V/VO</b>	M02V/VO	BS2027, BS8608, BONDLUG2, SCREW-BS2402

\* Each part comes in a bag of 10  
Easy to reorder. Simply add suffix -FG to the components listed in the kit.

### You can also order the components separately

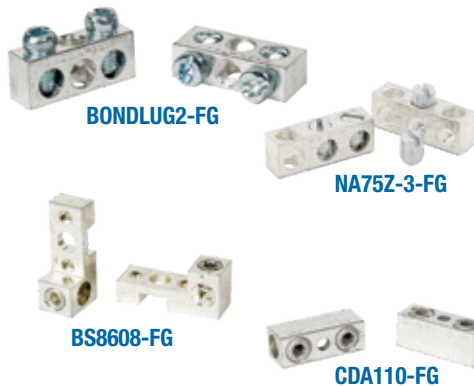

### Bond Lug

Cat. No.	Description
<b>BONDLUG2-FG</b>	Bond lug to be used in BE1,BQ2,BS2,M02
<b>NA75Z-3-FG</b>	Bond lug to be used in BS2-TCVBC

### Neutral Lug

Cat. No.	Description
<b>BS8608-FG</b>	Neutral for M02 200 A
<b>CDA110-FG</b>	Neutral for BE1 100 A

### Shroud

Cat. No.	Description
<b>BS2027-FG</b>	Red meter jaw safety shroud

### Set Screw

Cat. No.	Description
<b>SCREW-BS1002-FG 100A</b>	Set screw only for 100 A lugs
<b>SCREW-BS2402-FG 200A</b>	Set screw only for 200 A lugs

### Neutral

Cat. No.	Description
<b>BS2611L-FG</b>	Neutral 200 A
<b>BS2411GN-FG</b>	Neutral 200 A C/W Ground




## Accessories

### Fifth Jaw Assemblies



Meter Socket Series	Standard capacity 9 o' position	Full capacity 9 o' position		Full capacity 6 o' position	
	C205	Z105*	Z205*	CM-B106*	B306*†
BA3	•	•			
BDC	•		•		•
BE1	•	•		•	
BE2	•	•			
BEC	•	•			
BD2	•		•		•
BQ2	•		•		•
BS2 / BS2L	•		•		•
BS4 / BSC4	•		•		•
CO1	•	•		•	
CO2	•		•		•
CO1 Multigang	•	•		•	

\* CSA not applicable † For mono blocks only

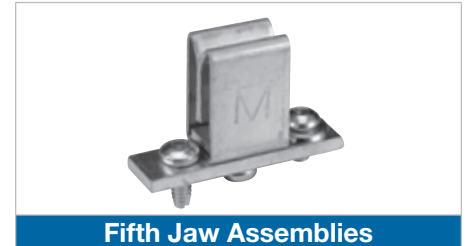

Fifth Jaw Assemblies




PMB200

### Pole Mount Bracket Kit

Cat. No.	Description	Conductor Range	Use w/Series	Option 1	Option 2
PMB200	Secures Microelectric meter socket to a wooden pole via Option 1 or 2	14-2 AWG	BA3, BE1, BQ2, BS, CL, CO1, CO2, CT, MO2, PL17, PL27, VT	Use a lag bolt through 5/8 in. center keyhole	Use the two side bracket mounting holes (0.320 in. dia.) to wrap around the pole

Suitable for any Microelectric meter socket with mounting holes 5 in. apart. Attach meter socket using one or two bracket(s). PMB200 kit comes complete with 2 brackets, 1 ground connector. Includes assembly hardware.

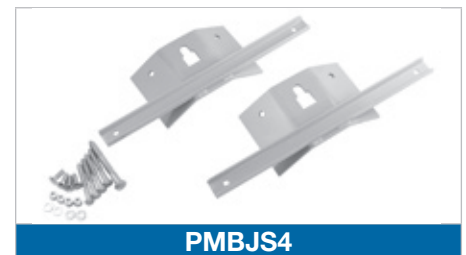

PMBJS4

### Pole Mounting Kit


Cat. No.	Kit Includes	Weight		Qty.
		lb.	kg	
PMBJS4	Support hangers			2
	1/2 in. x 4 in. lag bolt			1
	3/8 in. x 3 in. lag bolt			4
	5/16 in. x 1 in. carriage bolts, nuts and lock washers			
PMB6X12	6 in. offset from pole c/w 12 in. strut	7.7	3.5	1
PMB6X24	6 in. offset from pole c/w 24 in. strut	9.2	4.2	
PMB9X12	9 in. offset from pole c/w 12 in. strut	9.2	4.2	
PMB9X24	9 in. offset from pole c/w 24 in. strut	11.0	5.0	




PMB6X12

### Pole Line Hardware



Cat. No.	Description	F Dia. (in.)	G Dia. (in.)	H Dia. (in.)	T Thick (in.)	Weight (100 pcs)		Std. Pkg.
						lb.	kg	
RC729	Square washer	5/8	2	-	3/16	22	10.0	400
BC301L	Carriage bolt	3/8	1-1/2	1-1/2		11	5.0	50
B0506	Oval eye bolt	5/8	6	3	-	122	55.4	
B0508			8	4		136	61.8	
B0510			10	4		150	68.1	
B0512			12	4		168	76.3	



RC729



BC301L

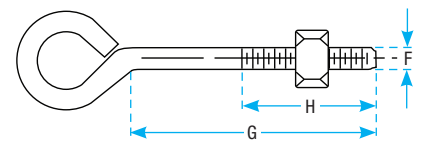

BO Series

## Accessories



**CO3417M-1-FG**



**CO2FB-KIT**



**CO3009-KIT**



**CO3009SD-KIT**



**CO3409FB-KIT**



**CO3009A2-KIT**




**BP250**



**CIEFA-1/2 / CIEFA-4**

**CIEFSA-1/2 / CIEFSA-4**

### KO Configuration

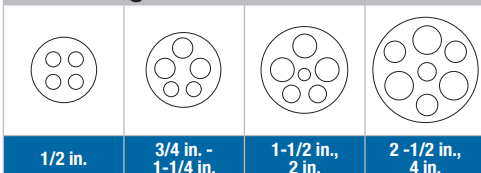

### Breaker Mounting Bracket

Cat. No.	Description
<b>CO3417M-1-FG</b>	Adjustable Mounting Bracket for CO2 Series to adapt to Siemens, SD and Cutler Hammer breakers

### Flexible Braid and Conductor Kits

Cat. No.	Description
<b>CO2FB-KIT</b>	Connection wires adaptor kit for CO2 Series meter sockets for field installation. To be used with Cutler Hammer breakers
<b>CO3009-KIT</b>	Siemens breaker conductor kit (breakers not included)
<b>CO3009SD-KIT</b>	Square D breaker conductor kit (breakers not included)
<b>CO3409FB-KIT</b>	Eaton breaker flexible braid kit (breakers not included)
<b>CO3009A2-KIT</b>	ABB breaker conductor kit (breakers not included)

### Connector Kit

Cat. No.	Description
<b>BP250</b>	Connector kit 2 x 250 kcmil

### Service Entrance Heads

Cat. No.	Trade Size
<b>Service Entrance Heads (Cast Aluminum) Rigid Conduit</b>	
<b>CIEFA-1/2</b>	1/2
<b>CIEFA-3/4</b>	3/4
<b>CIEFA-1</b>	1
<b>CIEFA-1 1/4</b>	1-1/4
<b>CIEFA-1 1/2</b>	1-1/2
<b>CIEFA-2</b>	2
<b>CIEFA-2 1/2</b>	2-1/2
<b>CIEFA-3</b>	3
<b>CIEFA-3 1/2</b>	3-1/2
<b>CIEFA-4</b>	4

Cat. No.	Trade Size
<b>Service Entrance Heads (Cast Aluminum) E.M.T.</b>	
<b>CIEFSA-1/2</b>	1/2
<b>CIEFSA-3/4</b>	3/4
<b>CIEFSA-1</b>	1
<b>CIEFSA-1 1/4</b>	1-1/4
<b>CIEFSA-1 1/2</b>	1-1/2
<b>CIEFSA-2</b>	2
<b>CIEFSA-2 1/2</b>	2-1/2
<b>CIEFSA-3</b>	3
<b>CIEFSA-3 1/2</b>	3-1/2
<b>CIEFSA-4</b>	4

Trade Size	KO Dimensions		
	Small	Large	Center
<b>1/2</b>	0.312	-	-
<b>3/4</b>	0.375	0.400	
<b>1</b>	0.438	0.500	-
<b>1-1/4</b>		0.625	
<b>1-1/2</b>	0.610	0.750	0.400

Trade Size	KO Dimensions		
	Small	Large	Center
<b>2</b>	0.750	1.000	0.525
<b>2-1/2</b>	0.875	1.300	1.000
<b>3</b>	1.125	1.750	1.125
<b>3-1/2</b>			
<b>4</b>			