

# Panelboards

## A-Series® Panelboards

### Pro-Stock, Unassembled Lighting Panels

## Section 9

#### 4 Select Main and/or Sub-feed Breaker Kit

Select main breaker kit appropriate for your interior type (see Step 1), amp rating and kAIC rating. If a sub-feed breaker is required, repeat the selection process.

**Note: 400A and 600A breaker kits cannot be used for sub-feed applications in Pro-Stock panelboards.**

For additional details and pricing, see Section 4 of the BuyLog.

Interior Type	Product Number <sup>1</sup>	List Price GO-101P	Rating Amps	No. of Poles	Breaker Rating (kAIC)						
					10	14	22	25	65	100	200
AQU1: 240 VAC 1 Phase	MB612	\$35.00	100	2	THQB		THHQB				
	MB614	\$80.00	100	4	(2) THQB		(2) THHQB				
	MB512	\$118.00	225	2	TQD		THQD				
	MB332	\$145.00	400	2					SGHA	SGLA	SGPA
	MB332	\$145.00	600	2					SGHA	SGLA	SGPA
	MB332WB	\$4225.00	600	2					SGHA+Kit		
AQU3: 208/120 VAC, 3 Phase	MB613	\$35.00	100	3	THQB		THHQB				
	MB616	\$90.00	100	6	(2) THQB		(2) THHQB				
	MB513	\$92.00	225	3	TQD		THQD				
	MB516	\$210.00	400	6	(2) TQD		(2) THQD				
	MB233	\$125.00	225	3					SFHA	SFLA	SFPA
	MB233WB	\$1325.00	225	3					SFHA+Kit		
	MB2332 <sup>5</sup>	\$125.00	400	6 <sup>5</sup>					2nd SFHA		
	MB2332WB <sup>5</sup>	\$1500.00	400	6 <sup>5</sup>					2nd SFHA+Kit		
	MB333	\$160.00	400	3					SGHA	SGLA	SGPA
	MB333	\$160.00	600	3					SGHA	SGLA	SGPA
	MB333WB	\$5100.00	600	3					SGHA+Kit		
AEU3: 480/277 Vac, 3 Phase	MB423	\$35.00	100	3		TEY					
	MB426	\$90.00	100	6		(2) TEY					
	MB133	\$52.00	150	3		TED <sup>2</sup>		THED			
	MB133	\$52.00	150	3				SEHA	SELA	SEPA	
	MB133WB	\$1000.00	150	3				SEHA+Kit			
	MB233	\$125.00	225	3				SFHA <sup>4</sup>	SFLA	SFPA	
	MB233WB	\$1325.00	225	3				SFHA+Kit <sup>4</sup>			
	MB2332 <sup>5</sup>	\$125.00	400	6 <sup>5</sup>				2nd SFHA <sup>4</sup>			
	MB2332WB <sup>5</sup>	\$1500.00	400	6 <sup>5</sup>				2nd SFHA+Kit <sup>4</sup>			
	MB333	\$160.00	400	3				SGHA <sup>4</sup>	SGLA	SGPA	
MB333	\$160.00	600	3				SGHA <sup>4</sup>	SGLA	SGPA		
MB333WB	\$5100.00	600	3				SGHA+Kit <sup>4</sup>				


<sup>1</sup>Breaker not included except for "WB" kits (where product number ends in "WB"). "WB" kits include a breaker, mounting kit and load-side lugs. Rating plugs must be ordered separately.

<sup>2</sup>Actual breaker rating is 18kAIC.


<sup>3</sup>Actual breaker rating is 30kAIC.

<sup>4</sup>Actual breaker rating is 35kAIC.


<sup>5</sup>To achieve 6 poles of subfeed, the MB233WB or MB233 kit is also required. 6 poles of subfeed only work with 400A and 600A interiors.



MB513 Breaker Kit

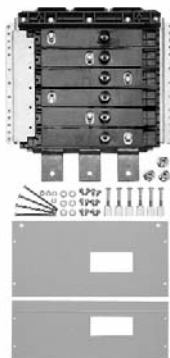

MB516 6-Pole Breaker Kit



MB233WB "WB" Breaker Kit

