



ORA3-LED50

LED WALL / FLOOD LIGHT



SPECIFICATIONS*

Watts	50W
Lumens	5470
Efficacy	111 lm/W
Replaces Up To	150W MH 1500W Quartz
Colour Temp	4,000K
Certification	cULus, DLC, IP65
Operating Temp	-40°C to +40°C
Voltage	120-277V, 347V in wall mount coming soon
LED Life	100,000 hours
Housing Material	Aluminum
Lens Material	Polycarbonate
Total Harmonic Distortion	19.78%
Power Factor	0.9788
Mounting Options	Yoke Mount, Knuckle Mount, Wall Mount



Knuckle Mount



Yoke Mount



DESCRIPTION

The ORA-LED is a fully adjustable multi-purpose fixture that replaces traditional wall packs or floods. The ORA features a sleek, elegant design with multiple mounting options.

APPLICATIONS



Town Houses



Condos

Perimeter
Lighting

Shopping Malls

FEATURES

- Elegant, sleek design with a modern look.
- Fixture head may be aimed down for dark sky compliance, or aimed out as needed.
- Three mounting options available – knuckle, yoke and wall mount.


*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 3.

NOTE: Not all of our product configurations are qualified on the DLC QPL. To view all of our DLC qualified products please visit the DLC qualified products list at www.designlights.org/qpl.


DIMENSIONS




Wall Mount

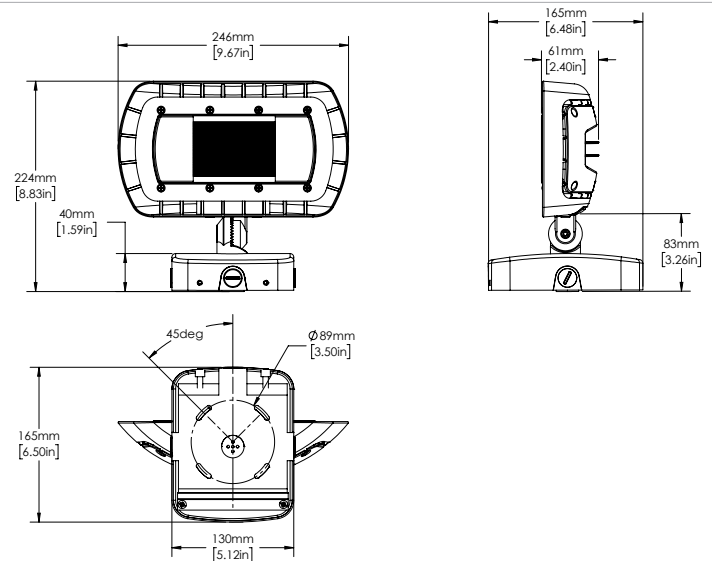

Yoke Mount

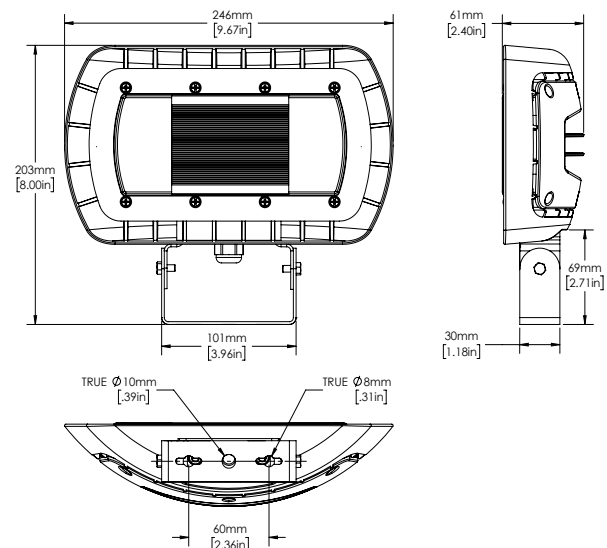

Knuckle Mount

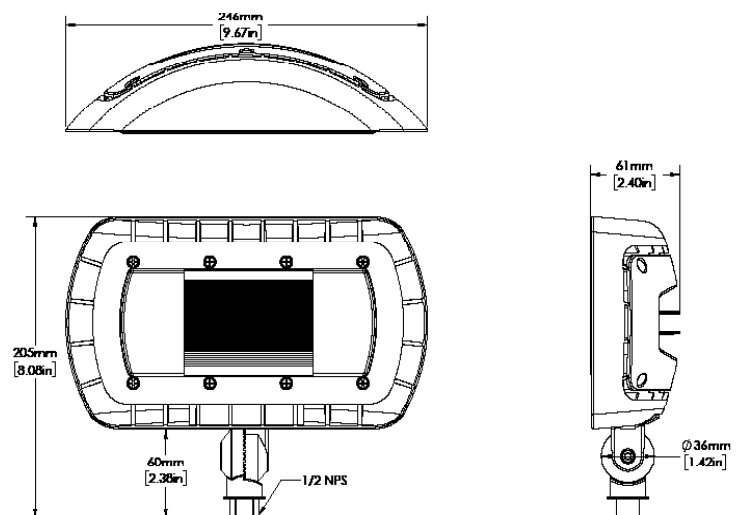

ORDERING GUIDE

ORA3						
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	MOUNTING	OPTIONS	
LED50	B - 120 - 277V*	4K - 4000K*	BRZ - BRONZE*	KN-Knuckle	PC- Photocell	
				YK - Yoke		
				WMC - Wall Mount with 3 conduit entries		

* Standard configuration

FIELD INSTALLED ACCESSORIES

CHECK THE ACCESSORIES YOU WISH TO ORDER:

- Wall mount with 3 Conduit Entries Bronze
- Architectural Wall Mount Bracket without conduit entries Bronze