
DataComm Equipment

Coax Strip and Crimp Tool

- Precision, form-ground stripping holes remove outer jacket and insulation from RG-59 and RG-6 coaxial cable
- Durable blades cut copper-coated steel conductors
- Three crimping nests for crimping F-connectors and ring terminals
- Cushioned, comfort-grip handles

| Description | Cat. No. |
|---|----------|
| Coax Strip & Crimp Tool | 30-433 |
| Coax Strip & Crimp Tool Kit w/ten RG-6 F-Connectors | 30-433F |

Crimpmaster™ Crimp Tools & Die Sets

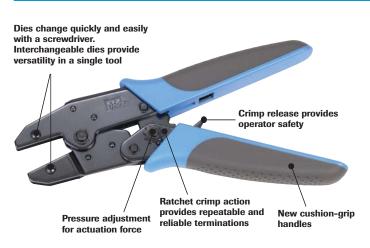

High quality ratchet-type crimp tool for electricians, contractors and installers who require guaranteed repeatability of good mechanical and electrical connections.

Paired Conductor Termination

| Description | Tool Cat. No. | Replacement Die Set Cat. No. |
|---|------------------|------------------------------------|
| Crimpmaster™ Crimp Tool Frame | 30-506 | — |
| RJ-45 Eight-position Crimp Tool for AMP RJ-45 modular plugs | 30-521 | 30-560 |
| RJ-45 Eight-position Crimp Tool for keyed or non-keyed modular plugs | 30-522 | 30-559 |
| RJ-11 Crimp Tool for two, four or six-position modular plugs | | 30-556 |
| RJ-11 Crimp Tool for DEC MMJ six-position modular plugs with an off-set release tab | 30-525 | 30-558 |
| Crimpmaster™ Handset Die for four-position handset modular plugs | 30-526 | 30-565 |

Round Cable Slitting and Ringing Tool

- Cuts around cable jacket as well as slits the length of jacket for easy removal
- Use with single or multiple conductor cable up to 1.75 in. O.D.



- Blade adjusts for jacket thicknesses up to .125 in.
- Spare blade in handle base

| Description | Cat. No. |
|--|----------|
| Round Cable Slitting and Ringing Tool | 45-144 |
| Replacement Blades for 45-144 (2/pkg.) | LB-1748 |

Coaxial Termination

| Description | Tool Cat. No. | Replacement Die Set Cat. No. |
|---|------------------|------------------------------------|
| 22-10 AWG (.324mm ² - 5.261mm ²) fully insulated slide-on connectors | — | 30-594 |
| Large gauge sound cable | 30-478 | |
| Insulated Terminal Crimp Tool with built-in locator | 30-479 | — |
| 22-12 AWG (.324mm ² - 3.31mm ²) Non-insulated open barrel crimp style connectors | — | 30-586 |
| RG-58, 59, 62 Non-plenum Cambridge BNC/TNC connectors | 30-481 | 30-573 |
| RG-8/11, RG-213, RG-216 Ethernet Thickwire, N-Series type plugs and jacks | 30-482 | 30-577 |
| RG-9, Belden® 8281® and RG-6 Cable, 50 & 75 Ohm | 30-483 | 30-578 |
| RG-58 and RG-174 cable for 50 and 75 Ohm cables | — | 30-587 |
| RG-174 Mini-59 Hex BNC/TNC coax connector | 30-485 | 30-576 |
| RG-58 and RG-59 Plenum cables, Thinwire PVC Hex | — | 30-591 |
| 16-26 AWG (1.31mm ² - 1.28mm ²) Miniature insulated rings and splices | — | 30-572 |
| SMA or SFR-Type fiber optic connectors | 30-490 | 30-597 |
| 22-10 AWG (.324mm ² - 5.261mm ²) Insulated ring tongue terminals and splices | 30-500 | 30-579 |
| 22-8 AWG (.3mm ² - 8mm ²) Non-insulated terminals and splices | — | 30-580 |
| RG-58 RG-59/62AU BNC/TNC 3-Piece Hex type connectors | 30-502 | 30-581 |
| CATV RG-59 and RG-6 Captive Ring F-connectors | 30-503 | 30-582 |
| SMA or SFR-Type Hex fiber optic connectors | 30-489 | 30-596 |