

Low Profile Sconce Box



Non-metallic, installs in existing 1/2" or 5/8" walls with 4" hole saw.

FEATURES AND BENEFITS

- Time-saving solution to retrofit installations that have shallow wall cavities—or obstructions running behind the wallboard
- Includes NM cable connector and mounting wings for 1/2" or 5/8" drywall and installation screws for mounting wings
- 4" diameter box accommodates most sconce light canopies, completely hiding the box

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ CU. IN. / DIA.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FSC405R	04094	Non-metallic / 5.0 Cu. In. / 4" Dia.	1	10	4.760	3.760	3.500	.500

Refer to chart on page R-22 for load ratings and number of single conductors.



PATENT PENDING.




E170558

INCLUDES...

5.0 cu. in. Low Profile Sconce Box, NM cable connector, (2) mounting wings for 1/2" drywall, (2) mounting wings for 5/8" drywall, and (2) installation screws for 'wings'.

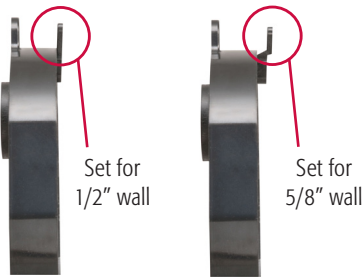

Easy-to-install mounting wings



INSTALLATION INSTRUCTIONS

FOR EXISTING WALLS:

- Determine sconce light location. Cut opening with 4" hole saw.
- Pipe obstruction behind wall prevents the installation of a typical sconce box. Install mounting wing for 1/2 or 5/8" drywall. Pull cable...
- ...Inserting it into installed NM94 connector. Tilt box to insert it into the stud cavity.
- Pull box towards you, into the 4" opening. Flip the retaining wings outward. Tighten screws to secure box to wallboard.
- Finished box installation. Ready to install sconce light.