WILLIAMS®

# 3/8" DRIVE TURBOSOCKET® SALVAGE/DAMAGED FASTENER SOCKETS

## Black Industrial Finish, Metric and SAE

TS38375

TSCS3813




| Product Code | Size (Inches) | A OAL (Inches) | B Drive End Diameter (Inches) | C Working End Diameter (Inches) | D Broach Depth (Inches) | E Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | F Nose Length (Inches) |
|---|---|---|---|---|---|---|---|---|
| TS38375 | 3/8 | 1 1/4 | 11/16 | 19/32 | 13/32 | 3/4 | 3/8 | 11/16 |
| TS38437 | 7/16 | 1 1/4 | 11/16 | 21/32 | 1/2 | 3/4 | 7/16 | 11/16 |
| TS38500 | 1/2 | 1 1/4 | 3/4 | 3/4 | 1/2 | 3/4 | 1/2 | - |
| TS38562 | 9/16 | 1 1/4 | 13/16 | 13/16 | 1/2 | 23/32 | 9/16 | - |
| TS38625 | 5/8 | 1 1/4 | 29/32 | 29/32 | 1/2 | 19/32 | 5/8 | - |
| TS38687 | 11/16 | 1 13/32 | 31/32 | 31/32 | 21/32 | 29/32 | 23/32 | - |
| TS38750 | 3/4 | 1 13/32 | 1 1/16 | 1 1/16 | 21/32 | 29/32 | 3/4 | - |

| Product Code | Size (MM) | OAL (Inches) | Drive End Diameter (Inches) | Working End Diameter (Inches) | Broach Depth (Inches) | Bolt Clearance Depth (Inches) | Bolt Clearance Diameter (Inches) | Nose Length (Inches) |
|---|---|---|---|---|---|---|---|---|
| TS38394 | 10 | 1 1/4 | 11/16 | 5/8 | 13/32 | 3/4 | 13/32 | 11/16 |
| TS38472 | 12 | 1 1/4 | 23/32 | 23/32 | 1/2 | 3/4 | 15/32 | - |
| TS38512 | 13 | 1 1/4 | 3/4 | 3/4 | 1/2 | 3/4 | 17/32 | - |
| TS38551 | 14 | 1 1/4 | 13/16 | 13/16 | 1/2 | 23/32 | 9/16 | - |
| TS38591 | 15 | 1 1/4 | 27/32 | 27/32 | 1/2 | 19/32 | 19/32 | - |
| TS38669 | 17 | 1 13/32 | 31/32 | 31/32 | 21/32 | 29/32 | 23/32 | - |

## TSFS3807 7 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, SAE

### Contents Include:

| Product Code | Size (Inches) | Product Code | Size (Inches) | Product Code | Size (Inches) |
|---|---|---|---|---|---|
| TS38375 | 3/8 | TS38562 | 9/16 | TS38750 | 3/4 |
| TS38437 | 7/16 | TS38625 | 5/8 | | |
| TS38500 | 1/2 | TS38687 | 11/16 | | |

## TSCS3813 13 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, SAE and Metric

### Contents Include:

| Product Code | Size (Inches) | Product Code | Size (MM) |
|---|---|---|---|
| TS38375 | 3/8 | TS38394 | 10 |
| TS38437 | 7/16 | TS38472 | 12 |
| TS38500 | 1/2 | TS38512 | 13 |
| TS38562 | 9/16 | TS38551 | 14 |
| TS38625 | 5/8 | TS38591 | 15 |
| TS38687 | 11/16 | TS38669 | 17 |
| TS38750 | 3/4 | | |

## TSMS3809 9 Piece TURBOSOCKET® Salvage Socket Set on Clip Rail, Metric

### Contents Include:

| Product Code | Size (MM) | Product Code | Size (MM) | Product Code | Size (MM) |
|---|---|---|---|---|---|
| TS38394 | 10 | TS38512 | 13 | TS38625 | 16 (5/8") |
| TS38437 | 11 (7/16") | TS38551 | 14 | TS38669 | 17 |
| TS38472 | 12 | TS38591 | 15 | TS38750 | 19 (3/4") |

### Features

Made in U.S.A.

- Quickly and easily remove damaged or rounded nuts and bolts.
- Place socket on fastener and turn with ratchet, breaker bar or T-handle.
- Grip on fastener tightens as more torque is applied.
- No hammering is required to install socket over fastener.
- Use on all types of standard nuts and bolts as well as studs, pipe nipples, and corroded auto and marine fasteners.
- May be used for "best fit" on metric and fractional fasteners.
- May be used with air or electric impact wrench for extra speed and turning power.

TSMS3809

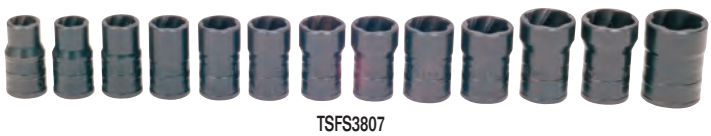
TSFS3807