



INDUSTRIAL
COMMERCIAL

E-19 LOCKING DEVICES

TESTING & CODE COMPLIANCE

- Listed to UL 498 (file no. E2369).
- UL Listed to Federal Spec. W-C-596 except as noted.
- CSA Certified to C22.2 no. 42 (file no. LR7087).

MATERIAL CHARACTERISTICS

Glass filled Nylon.
Meets flammability per UL 94 requirements,
VO rated.
Temperature Rating:
-40°C to 105°C.



Industrial Specification Grade Hart-Lock® Locking Devices

3 Pole, 4 Wire Grounding
NEMA L14-20, 20A 125/250V
NEMA L15-20, 20A 250V 3Ø
NEMA L16-20, 20A 480V 3Ø

20A 3 Pole, 4 Wire Grounding Industrial Specification Grade Locking Receptacles

FEATURES


- Rugged fiberglass reinforced nylon body.
- Clearly marked rating, NEMA configuration and approval listings on receptacle face.
- One piece brass contacts offer superior performance and minimum heat rise.
- Back wire terminal clamps for easy secure wiring.
- Combination head screws standard – slot/Phillips in the U.S.
- Add -C to catalog number for Canadian screws – slot/Robertson head combination.
- Safety ground clip provided for fast installation.

Industrial Specification Grade Single Receptacles – Back and Side Wire


Rating	A	V/AC	NEMA	Description	Color	Catalog No.
20	125/250		L14-20	Standard	Black	CWL1420R
				Corrosion Resistant	Yellow	CRL1420R
				Isolated Ground	Orange	IGL1420R*
20	250V 3Ø		L15-20	Standard	Black	CWL1520R
				Corrosion Resistant	Yellow	CRL1520R
				Isolated Ground	Orange	IGL1520R*
20	480V 3Ø		L16-20	Standard	Black	CWL1620R*
				Isolated Ground	Orange	IGL1620R*

*Not Federal spec. listed


NOTE: Weather Protective Covers from Cooper Wiring Devices that may be used with these products are described on page E-71 in this section.



CWL1420R

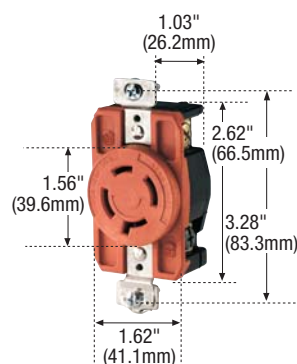

IGL1420R

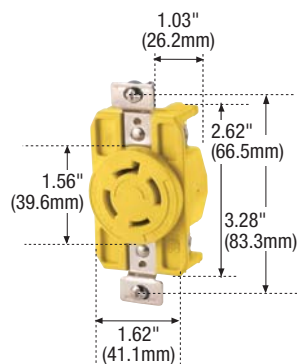

CRL1420R



L14-20R



L15-20R



L16-20R