



contents

Introduction	7/2 – 7/3
SIRIUS 3RW soft starters	
General data	7/4 – 7/11
High Performance soft starters	
3RW55 soft starters NEW	
- General Data	7/12 – 7/25
- Inline circuit	7/26 – 7/29
- Inside-delta circuit	7/30 – 7/33
- Accessories	7/34 – 7/35
3RW55 Failsafe soft starters NEW	
- General Data	7/36 – 7/48
- Inline circuit	7/49
- Inside-delta circuit	7/50
- Accessories	7/51 – 7/52
General Performance soft starters	
3RW52 soft starters NEW	
- General Data	7/53 – 7/64
- Inline circuit	7/65 – 7/66
- Inside-delta circuit	7/67 – 7/68
- Accessories	7/69 – 7/70
Basic Performance soft starters	
3RW50 soft starters NEW	
- General Data	7/71 – 7/79
- Inline circuit	7/80
- Accessories	7/81 – 7/82
3RW40 soft starters	
- General Data	7/83 – 7/89
- Inline circuit	7/90 – 7/91
- Accessories	7/92 – 7/93
3RW30 soft starters	
- General Data	7/94 – 7/101
- Inline circuit	7/102
- Accessories	7/103 – 7/104
Spare parts	
For 3RW55/3RW55 Failsafe	7/105 – 7/107
For 3RW52	7/108 – 7/109
For 3RW50	7/110
Class 73/74 Enclosed Softstarter applications	
Overview	7/111
Application	7/111
Selection and ordering data	7/112 - 7/123
Factory Modifications	7/124
Dimensional drawings	7/125
Schematics	7/126

Introduction

Overview

More information

Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=Sirius3rwFolder>

Industry Online Support (SIOS) topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109747404>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>



3RW55



3RW55 Failsafe



3RW52



3RW50



3RW40



3RW30

Page

3RW soft starters

High Performance soft starters

3RW55 soft starters

- TIA integration optional
- Plug-in communication modules for PROFINET, PROFIBUS, EtherNet/IP and Modbus
- Removable HMI module with color display, local interface and slot for a micro SD memory card
- Extended protection functions
- Up to 1000HP @ 480V (600V and 690V ratings also available)
- Automatic parameterization for simple commissioning and reliability even under changing load conditions
- Hybrid switching devices for minimum power loss and three-phase motor control for optimum/symmetrical motor control
- Pump stop for reduced mechanical loading and optimum pump stop control
- ATEX/IECEX certification

7/12

3RW55 Failsafe soft starters

- TIA integration optional
- Plug-in communication modules for PROFINET, PROFIBUS, EtherNet/IP and Modbus
- Removable HMI module with color display, local interface and slot for a micro SD memory card
- Extended protection functions
- Up to 400HP @ 480V
- SIL 1 - PL c / STO without additional components
- SIL 3 - PL e / STO with additional contactor and safety relay
- Hybrid switching devices for minimum power loss and three-phase motor control for optimum/symmetrical motor control
- Pump stop for reduced mechanical loading and optimum pump stop control
- ATEX/IECEX certification

7/36

General Performance soft starters

3RW52 soft starters

- TIA integration optional
- Plug-in communication modules for PROFINET, PROFIBUS, EtherNet/IP and Modbus
- HMI modules optional
- Soft starting and stopping
- Current limiting
- Motor overload protection (optionally with thermistor motor protection)
- Analog output (optional)
- Up to 400HP @ 480V (600V ratings also available)
- Hybrid switching devices for minimum power loss and three-phase motor control for optimum/symmetrical motor control
- Soft Torque for reduced mechanical loading and optimum pump stop
- Parameterization using potentiometers

7/53

Introduction



3RW55



3RW55 Failsafe



3RW52



3RW50



3RW40



3RW30

Page

3RW soft starters

Basic Performance soft starters

3RW50 soft starters

- TIA integration optional
- Communication modules for PROFINET, PROFIBUS, EtherNet/IP and Modbus
- HMI modules optional
- Soft starting and stopping
- Current limiting
- Motor overload protection (optionally with thermistor motor protection)
- Analog output (optional)
- Up to 400HP @ 480V (600V ratings also available)
- Hybrid switching devices for minimum power loss and two-phase motor control
- Soft Torque for reduced mechanical loading and optimum pump stop
- Parameterization using potentiometers
- ATEX/IECEx certification

7/71

3RW40 soft starters

- Soft starting and stopping
- Current limiting
- Motor overload protection (optionally with thermistor motor protection)
- Up to 75HP @ 480V 600V ratings also available)
- Hybrid switching devices for minimum power loss and two-phase motor control
- ATEX certification

7/83

3RW30 soft starters

- Soft starting with voltage ramp
- Up to 75HP @ 480V

7/94

For enclosed applications

Enclosures in NEMA 1, 3, 4, & 12 types UL/CSA listed

- Complete starter includes 3RW40 or 3RW44 and CPT
- Performance Range of up to 600 Hp (at 460 V)
- Combination options include circuit breaker or fusible disconnect
- Application areas:
 - Compressors
 - Pumps
 - Stamping presses
 - Cooling towers
 - Molding and extruding
 - Chippers and debarkers
- Lumber processing
- Pulp & paper processing
- Conveyors
- Textiles
- HVAC

7/111

Use of soft starters in conjunction with IE3/IE4 motors

Note:

For the use of SIRIUS 3RW soft starters in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, [see Application Manual](#).

SIRIUS 3RW Soft Starters

General data


Overview

More information

Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=Sirius3rwFolder>

Industry Online Support (SIOS) topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109747404>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

SIRIUS 3RW soft starters – as versatile as your application

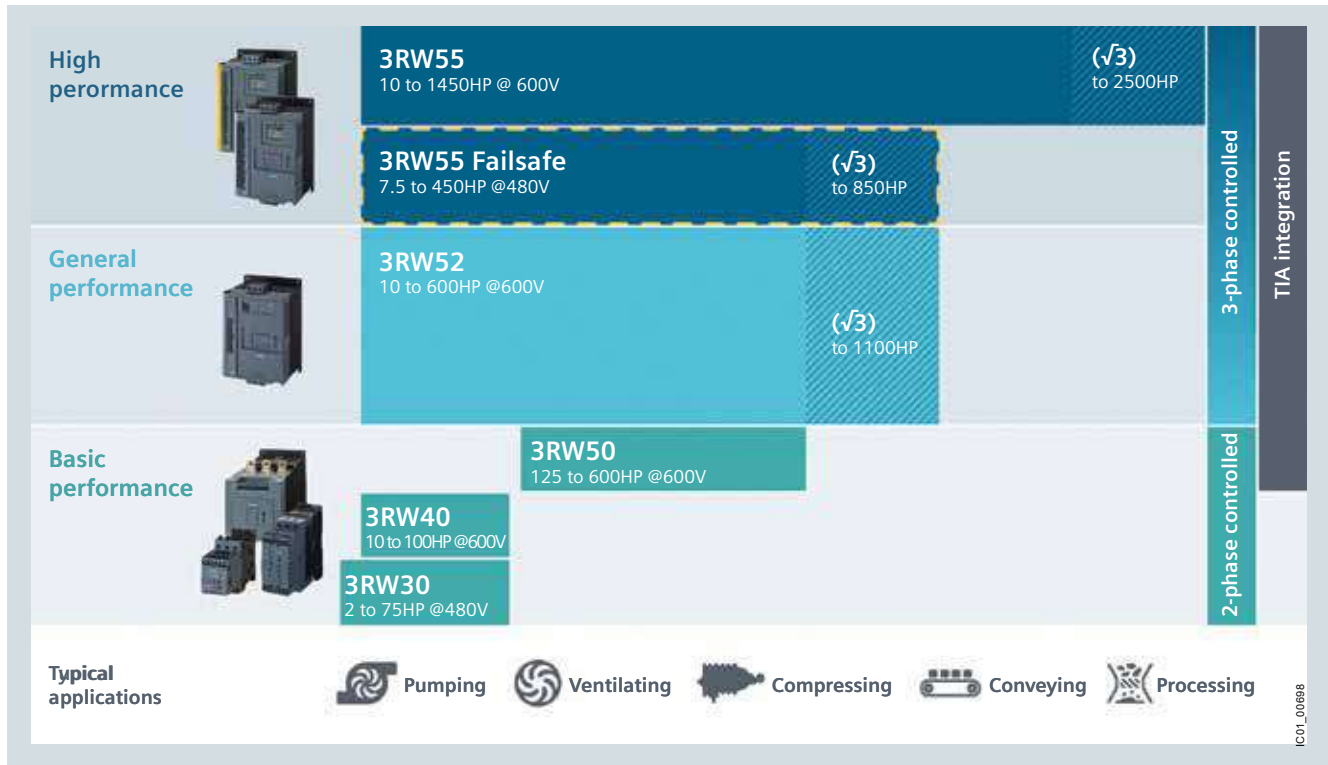

SIRIUS 3RW Soft Starters

General data



Applications	High Performance	General Performance	Basic Performance		
SIRIUS soft starters	3RW55/3RW55-F	3RW52	3RW50	3RW40	3RW30

Selection aid for soft starters

Normal starting (CLASS 10)

Pumps	●	●	●	●	●
Pumps with special pump stop (to prevent water hammer)	●	○	○		
Heat pumps	●	●	●	●	●
Hydraulic pumps	●	●	●	●	○
Presses	●	●	●	●	○
Conveyor belts	●	●	●	●	○
Roller conveyors	●	●	●	●	○
Screw conveyors	●	●	●	●	○
Escalators	●	●	●	●	
Piston compressors	●	●	●	●	
Screw compressors	●	●	●	●	
Small fans ¹⁾	●	●	●	●	
Centrifugal blowers	●	●	●	●	
Bow thrusters	●	●	●	●	

Heavy starting (CLASS 20)

Stirrers	●	○	○	○	
Extruders	●	○	○	○	
Lathes	●	○	○	○	
Milling machines	●	○	○	○	

Heavy starting (CLASS 30)

Large fans ²⁾	●				
Circular saws/bandsaws	●				
Centrifuges	●				
Mills	●				
Crushers	●				

- Recommended soft starter
- Possible soft starter

1) The mass inertia of the fan is <10 times the mass inertia of the motor.
 2) The mass inertia of the fan is ≥10 times the mass inertia of the motor.



Applications		High Performance		General Performance	Basic Performance		
SIRIUS soft starters		3RW55	3RW55-F	3RW52	3RW50	3RW40	3RW30
General technical specifications							
Operational current at 40 °C	A	13 ... 2 217	13 ... 987	13 ... 987	143 ... 570	12.5 ... 106	3 ... 106
Operational voltage	V	200 ... 690 ¹⁾	200 ... 480	200 ... 600	200 ... 600	200 ... 600	200 ... 480
Operating power for three-phase motors							
• At 400 V, at 40 °C	- Inline circuit	kW	5.5 ... 710	5.5 ... 315	5.5 ... 315	75 ... 315	5.5 ... 55
	- Inside-delta circuit	kW	11 ... 1 200	11 ... 560	11 ... 560	--	--
• At 460/480 V at 50 °C	- Inline circuit	hp	7.5 ... 1 000	7.5 ... 400	7.5 ... 400	100 ... 400	7.5 ... 75
	- Inside-delta circuit	hp	10 ... 1 700	10 ... 750	10 ... 750	--	--
Ambient temperature ²⁾	°C	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60	-25 ... +60
Soft starting/ramp-down		✓	✓	✓	✓	✓	✓ ³⁾
Voltage ramp		✓	✓	✓	✓	✓	✓
Starting voltage	%	20 ... 100	20 ... 100	30 ... 100	30 ... 100	40 ... 100	40 ... 100
Ramp-up and ramp-down time	s	0 ... 360	0 ... 360	0 ... 20	0 ... 20	0 ... 20	0 ... 20 ³⁾
Pump stop (torque control) ⁴⁾		✓	✓	--	--	--	--
• Starting torque	%	10 ... 100	10 ... 100	--	--	--	--
• Torque limit	%	20 ... 200	20 ... 200	--	--	--	--
Soft Torque (torque limit)		--	--	✓	✓	--	--
Integral bypass contact system		✓	✓	✓	✓	✓	✓
Intrinsic device protection		✓	✓	✓	✓	✓	--
Motor overload protection		✓ ⁵⁾	✓ ⁵⁾	✓	✓ ⁵⁾	✓ ⁵⁾	--
Thermistor motor protection evaluation		✓	✓	✓ ⁶⁾	✓ ⁶⁾	✓ ⁶⁾	--
Analog output		✓	✓	✓ ⁶⁾	✓ ⁶⁾	--	--
Remote RESET		✓	✓	✓	✓	✓	--
Adjustable current limiting		✓	✓	✓	✓	✓	--
Inside-delta circuit ¹⁾		✓	✓	✓	--	--	--
Breakaway pulse		✓	✓	--	--	--	--
Automatic parameterization		✓	✓	--	--	--	--
Pump cleaning		✓	✓	--	--	--	--
Condition monitoring		✓	✓	--	--	--	--
User account administration ⁸⁾		✓	✓	--	--	--	--
Creep speed in both directions of rotation		✓	--	--	--	--	--
Reversing duty		✓	✓	--	--	--	--
Reversing DC braking ⁴⁾⁷⁾		✓	--	--	--	--	--
DC braking ⁴⁾⁷⁾		✓	--	--	--	--	--
Dynamic DC braking ⁴⁾⁷⁾		✓	--	--	--	--	--
Motor heating		✓	--	--	--	--	--
Communication function ⁹⁾		✓	✓	✓	✓	--	--
HMI module installable in the cabinet door		✓	✓	✓ ⁹⁾	✓ ⁹⁾	--	--
Operating measured value display		✓	✓	✓ ⁹⁾	✓ ⁹⁾	--	--
Logbooks		✓	✓	✓ ⁹⁾	✓ ⁹⁾	--	--
Statistical data and slave pointer function		✓	✓	✓ ⁹⁾	✓ ⁹⁾	--	--
Trace function ⁸⁾		✓	✓	--	--	--	--
Programmable control inputs and outputs		✓	✓	--	--	--	--
Number of parameter sets		3	3	1	1	1	1
Parameterizable via software ⁸⁾		✓	✓	--	--	--	--
Number of controlled phases		3	3	3	2	2	2
Heavy starting CLASS 30 ⁴⁾		✓	✓	--	--	--	--

✓ Function available
-- Function not available

¹⁾ Inside-delta circuit only up to operational voltage 600 V.

²⁾ Note derating above 40 °C.

³⁾ Only soft starting available for 3RW30.

⁴⁾ Calculate soft starter and motor with size allowance where required.

⁵⁾ When using the motor overload protection according to ATEX/IECEx, an upstream contactor may be required, [see page 7/10](#).

⁶⁾ Special device versions only.

⁷⁾ Not possible in inside-delta circuit.

⁸⁾ With software Soft Starter ES (TIA Portal).

⁹⁾ Only in conjunction with special accessories.

SIRIUS 3RW Soft Starters

General data


Constraints

The 3RW soft starters should always be designed on the basis of the required rated operational current of the motor.

The motor ratings listed in the selection and ordering data are rough guide values and designed for basic starting conditions (CLASS 10). For other starting conditions we recommend the Simulation Tool for Soft Starters (STS).

Motor rating data in kW and hp is based on IEC 60947-4-1.

At an installation altitude above 2 000 m, max. permissible operational voltage is reduced to 480 V.

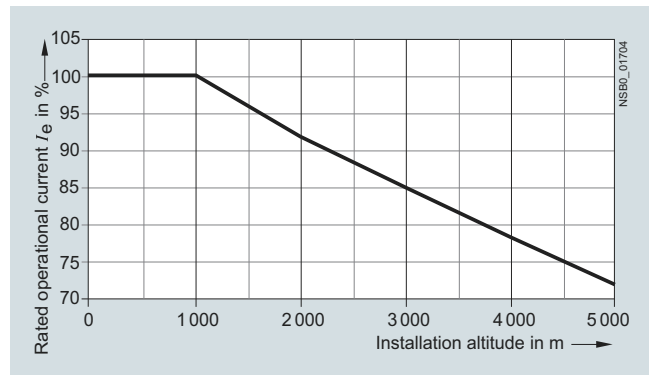

Installation altitude for SIRIUS 3RW soft starters

The selection and ordering data were determined for the following constraints (stand-alone installation without auxiliary fan)



Applications		High Performance	General Performance	Basic Performance		
SIRIUS soft starters		3RW55/3RW55-F	3RW52	3RW50	3RW40	3RW30
Constraints						
Maximum starting time	s	20	10			3
Maximum starting current in % of motor current	I_e	300				
Maximum number of starts per hour	1/h	5				20

Simulation Tool for Soft Starters (STS)

The Simulation Tool for Soft Starters (STS) provides a convenient means of designing soft starters using a simple, quick and easy-to-use interface.

Entering the motor and load data will simulate the application and prompt suggestions for suitable soft starters.

Link to the free download of the [Simulation Tool for Soft Starters \(STS\)](#).

- Simple, quick and user-friendly interface
- Detailed and up-to-date Siemens motor database, including IE3/IE4 motors.
- Simulation of heavy starting up to CLASS 30
- Update-capable (e.g. motors, load types, functions)
- Fast simulations with minimum input data
- Immediate, graphical curve charts of start operations with limit values
- Table view of suitable soft starters for the application



Everything at a glance: Simulation and results list


SIRIUS 3RW Soft Starters

General data


Circuit concept

Three-phase controlled SIRIUS 3RW soft starters can be operated in two different types of circuit:

- **Inline circuit**
The controls for isolating and protecting the motor are simply connected in series with the soft starter. The motor is connected to the soft starter with three leads.
- **Inside-delta circuit**
The wiring is similar to that of wye-delta starters. The phases of the soft starter are connected in series with the individual motor windings. The soft starter then only has to carry the phase current, amounting to about 58% of the rated motor current (conductor current).

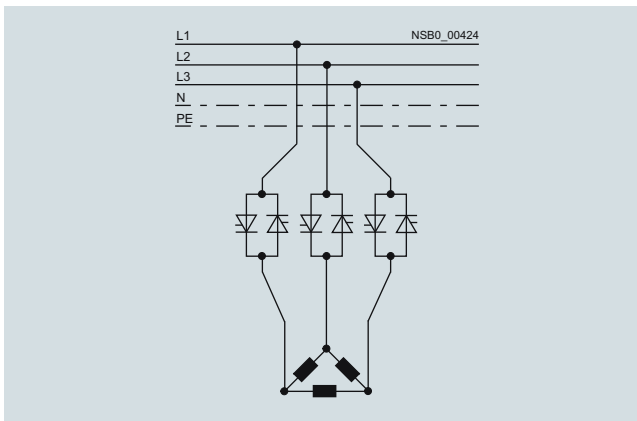Comparison of the types of circuit

Inline circuit: Rated current I_e corresponds to the rated motor current I_n , three cables to the motor

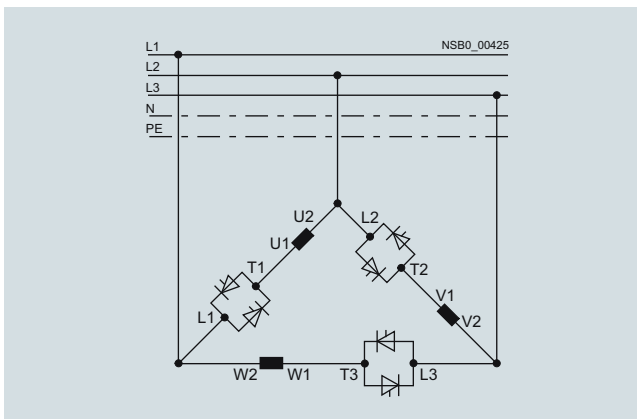

Inside-delta circuit: Rated current I_e corresponds to approx. 58% of the rated motor current I_n , six cables to the motor (as for wye-delta starters)

Which circuit?

Using the inline circuit involves the lowest wiring outlay. If the soft starter to motor connections are long, this circuit is preferable.

The wiring complexity is twice as high when using the inside-delta circuit, but a smaller device can be used with the same rating. Thanks to the choice of operating mode between the inline circuit and inside-delta circuit, it is always possible to select the most favorable solution.

The braking function is possible only in the inline circuit. The inside-delta circuit cannot be used in 690 V line supplies.

Configuration

The solid-state 3RW soft starters are designed for normal starting. In case of heavy starting or increased starting frequency, a larger unit must be selected. The 3RW52 soft starters may be used in isolated supply networks (IT systems) up to 600 V AC and the 3RW55 soft starters even up to 690 V.

For long starting times it is recommended to have a PTC sensor or temperature switch in the motor. This also applies for the ramp-down modes torque control, pump stop and DC braking, because during the ramp-down time in these modes, an additional current loading applies in contrast to free ramp-down.

No capacitive elements are permitted in the motor feeder between the SIRIUS 3RW soft starter and the motor (e.g. no reactive-power compensation equipment). In addition, neither static systems for reactive-power compensation nor dynamic PFC (Power Factor Correction) must be operated in parallel during starting and ramp-down of the soft starter. This is important to prevent faults arising on the compensation equipment and/or the soft starter.

All elements of the main circuit (such as fuses and controls) should be dimensioned for direct-on-line starting, following the local short-circuit conditions. Fuses and switching devices must be ordered separately. The harmonic component load for starting currents must be taken into consideration for the selection of motor starter protectors (selection of release). Please observe the maximum switching frequencies specified in the technical specifications.

Notes:

When three-phase motors are switched on, voltage drops occur as a rule on starters of all types (direct-on-line starters, wye-delta starters, soft starters). The infeed transformer must always be dimensioned such that the voltage dip when starting the motor remains within the permissible tolerance. If the infeed transformer is dimensioned with only a small margin, it is best for the control voltage to be supplied from a separate circuit (independently of the main voltage) in order to avoid the potential switching off of the soft starter.

For dimensioning soft starters, we recommend our Simulation Tool for Soft Starters (STS), see page 7/7 or our Technical Support: <https://support.industry.siemens.com/My/ww/en/requests>.

Recommended parameters for the initial commissioning of our SIRIUS 3RW soft starters are listed in every report of our Simulation Tool for Soft Starters (STS). In addition, our High Performance soft starters provide support by means of their commissioning wizards.

Motor feeders with soft starters

The type of coordination according to which the motor feeder with soft starter is mounted depends on the application-specific requirements. Normally, fuseless mounting (combination of motor starter protector and soft starter) is sufficient.

If type of coordination "2" is to be fulfilled, then semiconductor fuses must be fitted in the motor feeder.

T_{OC} 1

Type of coordination "1" according to IEC 60947-4-1: After a short-circuit incident, the unit is defective and therefore unsuitable for further use (protection of persons and system guaranteed).

T_{OC} 2

Type of coordination "2" according to IEC 60947-4-1: After a short-circuit incident the unit is suitable for further use (protection of persons and system guaranteed).

The type of coordination refers to soft starters in combination with the stipulated protective device (motor starter protector/fuse), not to any additional components in the feeder.

The types of coordination are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Feeder tests and events

To keep the scope of feeder tests with SIRIUS 3RW soft starters within economically reasonable limits, tests were conducted with feeder components (motor starter protectors/circuit breakers, fuses) that cover the greatest number of use cases (different soft starter versions depending on, for example, line voltage, type of circuit, or necessary overdimensioning). For the combined tests that were conducted, the values for the short-circuit breaking capacity I_q in kA were determined and documented.

If the short-circuit breaking capacity is the same, of course, smaller circuit breakers or fuses can also be used for the selected soft starter provided the dimensioning of the short-circuit components is suitable for the connected three-phase motor and the line protection for the cables used. For type of coordination "2" (with semiconductor protection), it is also necessary to compare the characteristics because the protection function would no longer be completely ensured if too small a fuse were selected. If the soft starter does not have a motor protection function, the motor protection must also be dimensioned appropriately.

Setting the motor current

If circuit breakers with an overload release are used (e.g. SIRIUS 3RV20 motor starter protector), we recommend activating the motor protection function of the SIRIUS 3RW soft starter to protect the motor and setting the soft starter to the rated operational current I_e of the motor. We recommend setting the circuit breaker in such a way that it provides line protection but does not usually trip before the soft starter when a motor overload occurs.

Line protection and motor protection

Line protection and motor protection are not ensured in all operating cases, depending on:

- How the motor feeder is constructed (e.g. with fuses or motor starter protectors)
- Whether the SIRIUS 3RW soft starters are operated within the specification relevant for the tests (IEC 60947-4-2)
- Or whether the documented constraints (see page 7/7) have been observed.

There are operating states of the thyristors (caused, for example, by high starting frequencies or heavy starting) that do not permit an overload to be disconnected by the SIRIUS 3RW soft starter. These cases are very rare but can not be ruled out in all cases.

In accordance with IEC 60947-4-2, the SIRIUS 3RW soft starters are dimensioned and checked for operation with up to 8 times the rated operational current I_e . For currents larger than this, reliable disconnection of an overcurrent by the SIRIUS 3RW soft starter is not ensured. Such large overcurrents have to be disconnected by a switching device at a higher level (e.g. by a circuit breaker or a fuse in conjunction with an optional line contactor).

Motor protection by the SIRIUS 3RW soft starter is ensured for currents up to 8 times the rated operational current I_e in any case. Line protection is covered by the line-side motor starter protector/circuit breaker or fuse. These motor feeder components must be dimensioned accordingly and the cable cross-sections must be chosen to match.

Line protection

Line protection in motor feeders with soft starters is always covered by a fuse or a circuit breaker both in case of an overload and in case of a short circuit. The circuit breaker must have an overload release. That is the case for motor starter protectors (e.g. SIRIUS 3RV20).

Circuit breakers without an overload release (e.g. SIRIUS 3RV23 motor starter protectors) must not be used because they do not provide overload protection. The feeder tests for these were therefore not performed. If the motor feeder with SIRIUS 3RW soft starters is configured without a fuse, motor starter protectors must be used that ensure tripping on an overload.

Motor protection

If fuses are used to provide protection against overload and short circuit of the cables, the motor is protected by the SIRIUS 3RW soft starter. If the constraints (simple starting conditions CLASS 10, listed maximum values for starting current, starting time and number of starts per hour) of page 7/7 are observed, the motor feeders can be configured according to IEC as described in the section about soft starters (an optional line contactor is not required). If these preconditions are met, the SIRIUS 3RW soft starters are able to trip on overloads to protect the motor in any case.

In other starting conditions and on heavy starting, the following must be considered:

Trip classes

Tested fuseless switchgear assemblies comprising SIRIUS 3RW soft starters and motor starter protectors only comply with CLASS 10.

To configure tested motor feeders, for example, for CLASS 20 or CLASS 30, fuses must be used together with SIRIUS 3RW soft starters.

Line contactor

In applications with high starting frequencies or heavy starting as of CLASS 20, we recommend combining fuses with the use of a line contactor on the line side so that a motor overload is disconnected by the fault signaling contact of the soft starter in any case (that is, even in rare cases in which disconnection by the SIRIUS 3RW soft starter is no longer possible due to the operating state of the thyristors).

SIRIUS 3RW Soft Starters

General data

ATEX/IECEx-certified motor overload protection

Ambient temperature during operation

The SIRIUS 3RW soft starters are approved for operation in a temperature range of -25 to +60 °C.

Please take into account derating of the rated operational current for ambient temperatures above 40 °C.

For more information, see [Equipment Manual and the technical data sheet of the selected soft starter](#).

Trip class (electronic overload protection)

The motor and cables must be dimensioned for the selected trip class.

The rated data of the soft starters refers to normal starting (CLASS 10). For heavy starting (> CLASS 10), the soft starter may need to be oversized as only a rated motor current that is lower than the soft starter rated current can be set.

Short-circuit protection

The SIRIUS 3RW soft starter does not have short-circuit protection. Short-circuit protection must be ensured.

Line protection

Avoid impermissibly high cable surface temperatures by correctly dimensioning the cross-sections.

The cable cross-section must be adequately dimensioned.

Line contactor or additional undervoltage release on the motor starter protector

In many ATEX/IECEx applications no additional measures (e.g. the use of a line contactor) are necessary with regard to the motor feeder configuration.

The operation of the selected soft starter may, depending on the amplitude of the line voltage and the type of motor connection (inline circuit or inside-delta circuit), result in the loss of the certified motor overload protection according to ATEX/IECEx if one of the two remedial measures listed below is not implemented.

Remedial measures

- An additional line contactor in the main circuit
- An additional undervoltage release for a motor feeder configuration with a motor starter protector

The line contactor or the undervoltage release are connected to error outputs 95, 96 and 98 of the selected soft starter

Note:

For ATEX/IECEx applications, the accompanying information on parameterization and commissioning must be observed in the ATEX/IECEx chapters of the [Equipment Manual](#) for the selected soft starter.

Article No. scheme

Product versions	Article number
Device type	High Performance soft starters 3RW55 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> General Performance soft starters 3RW52 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Basic Performance soft starters 3RW50 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 3RW40 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 3RW30 <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Size/rated operational current I_e	e.g. 15 = 25 A in size S1 <input type="checkbox"/> <input type="checkbox"/>
Connection type	e.g. 1 = screw terminal <input type="checkbox"/>
Soft starter functionality	e.g. AC = with bypass and analog output, three-phase controlled <input type="checkbox"/> <input type="checkbox"/>
Rated control supply voltage U_s	e.g. 0 = 24 V AC/DC <input type="checkbox"/>
Rated operational voltage U_e	e.g. 4 = 200 ... 480 V AC <input type="checkbox"/>
Example	3RW52 1 5 - 1 A C 0 4

Note:


The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders please use the article numbers quoted in the selection and ordering data.

Benefits

Can be flexibly deployed in many applications

Strong portfolio:
comprehensive, coordinated soft starter portfolio

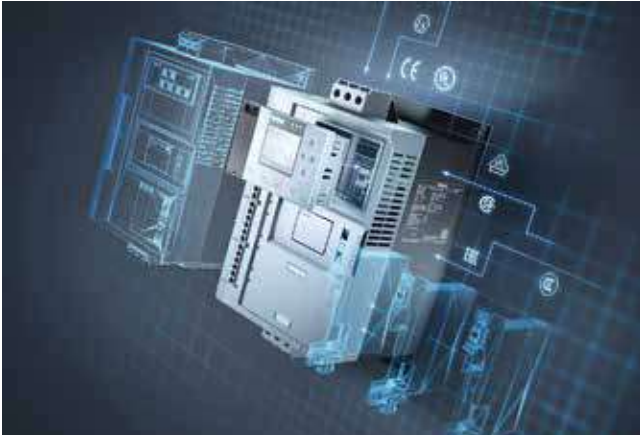

- The right hardware for all requirements, soft starters for tasks ranging from simple to demanding starting in Basic, General and High Performance versions
- Extensive portfolio for individual expansion: Optional HMIs for installation in the device or mounting on the control cabinet door
- Communication via PROFINET, PROFIBUS, EtherNet/IP and Modbus
- Design enclosure with removable terminals, space-saving thanks to compact design and rugged thanks to coated printed circuit boards
- Can be used worldwide thanks to numerous certificates and approvals: IEC, UL, CSA, CCC, ATEX/IECEX, shipbuilding

Intelligent operation:
concentrated, application-specific functionality




- Can be used in a wide variety of applications: Pumping, ventilating, compressing, moving and processing
- Integrated, self-learning automatic parameterization depending on motor starting conditions
- Application-specific functionality such as pump cleaning and pump stop
- Condition monitoring: Current and power monitoring with warning and alarm limits, starting time monitoring

Efficient switching:
hybrid switching technology on board



- Energy-efficient switching and mechanical protection of the drive train thanks to soft starters with hybrid switching technology
- Low-wear switching extends the service life of the devices
- Soft starting prevents current peaks, thereby increasing the network stability
- Protection against disturbances in the application. Mechanical protection for the drive train

Ready for a digital future:
data available whenever and wherever needed

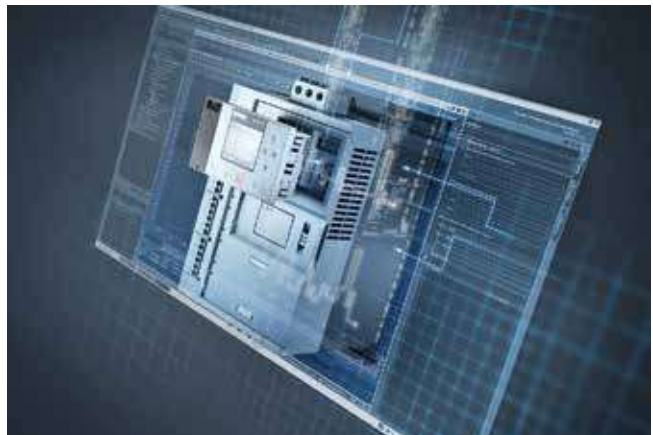

- Support from tools and data during engineering
- Simulation Tool for Soft Starters for support during product selection
- Very simple, standardized commissioning and configuration via Soft Starter ES in TIA Portal
- Integration in the automation system via communication interfaces
- Data availability and analysis: large volumes of data at any time and anywhere, even into MindSphere

High Performance Soft Starters

3RW55 soft starters > General data

Overview

More information


Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=Sirius3rwFolder>

Industry Online Support (SIOS) topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109747404>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>



Equipped with the utmost functionality, the SIRIUS 3RW55 High Performance soft starters confidently handle even difficult starting and stopping operations. Thanks to innovative torque control, the device can be used for drives with an output of between 10 to 1,450 HP @ 600V.


The functions have been specially designed to offer maximum user friendliness. The HMI (with color display, local interface and a slot for micro SD memory card) and plug-in communication modules (PROFINET, PROFIBUS, EtherNet/IP and Modbus) ensure maximum flexibility. With their modern hybrid switching technology, the SIRIUS 3RW55 soft starters offer efficient switching for long-term, energy-saving use.

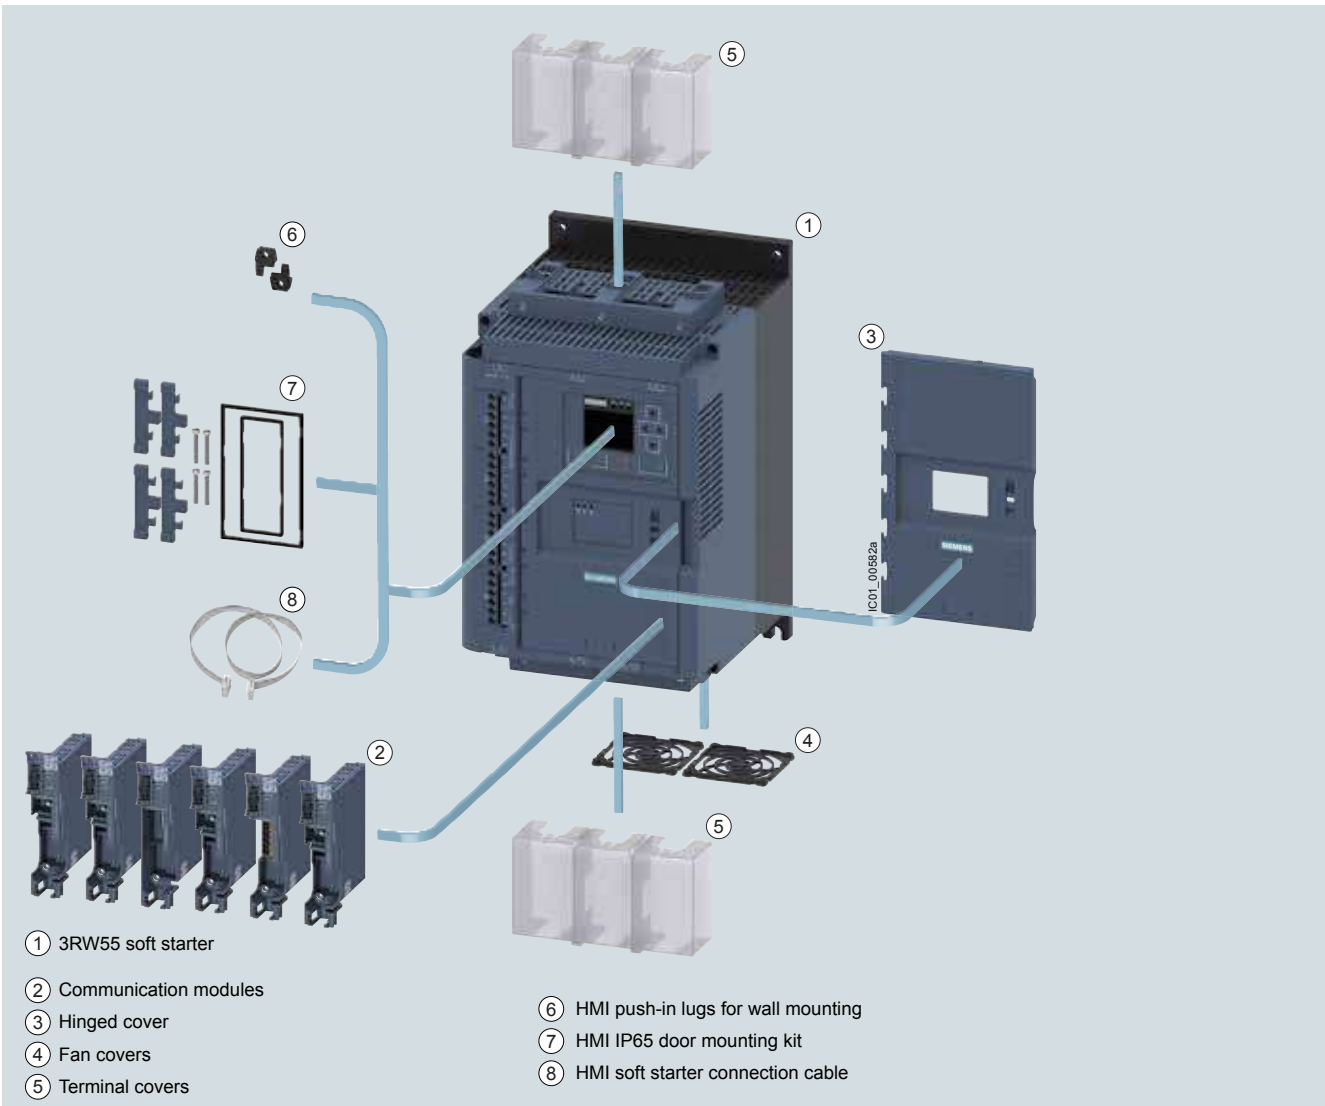

- ① 3RW55 soft starter
- ② Communication modules
- ③ Hinged cover
- ④ Fan covers
- ⑤ Terminal covers
- ⑥ HMI push-in lugs for wall mounting
- ⑦ HMI IP65 door mounting kit
- ⑧ HMI soft starter connection cable

3RW55 High Performance soft starters with accessories, see page 7/34.

Benefits

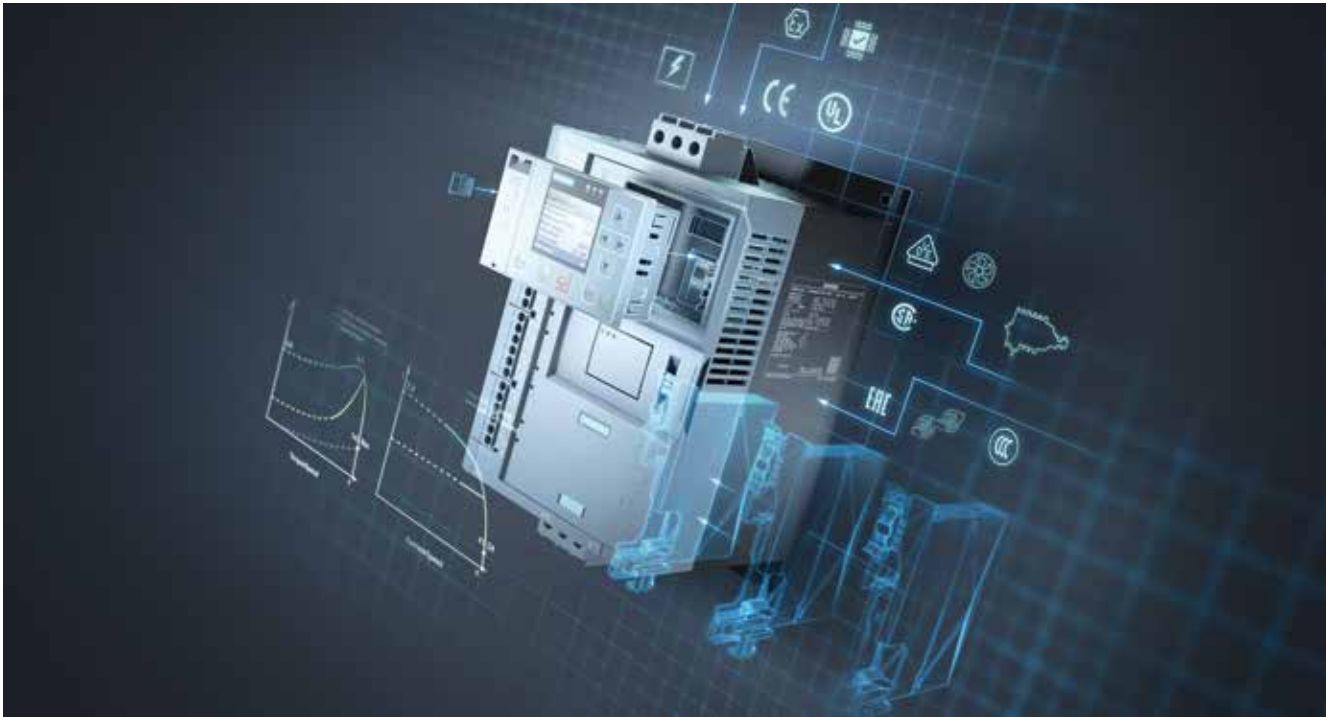

Product characteristics / function	Performance features / benefits
Automatic parameterization	Extremely easy commissioning and reliability even under changing load conditions
Hybrid switching devices and three-phase motor control	Minimum power loss and optimum/symmetrical motor control
Integration into TIA Portal – communication modules optional	Efficient configuration and maximum flexibility in automation engineering
Removable HMI with color display, local interface, slot for micro SD memory card	Maximum flexibility with regard to user interface and intuitive menu guidance
Pump stop and torque control	Reduced mechanical loading and optimum pump stop control
Certified according to ATEX/IECEX directive	Suitable for the starting of explosion-proof motors

High Performance Soft Starters

3RW55 soft starters > General data

Technical specifications


More information

Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/25099/td>
Equipment Manual "SIRIUS 3RW55 Soft Starter", see <https://support.industry.siemens.com/cs/ww/en/view/109753752>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/25099/faq>
Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

Type	3RW551.-.HA.4 3RW551.-.HA.5	3RW552.-.HA.6 3RW553.-.HA.6	3RW552.-.HA.4 3RW553.-.HA.4	3RW554.-.HA.4	3RW554.-.HA.6	3RW555.-.HA.4	3RW555.-.HA.6
------	--------------------------------	--------------------------------	--------------------------------	---------------	---------------	---------------	---------------

Installation/fixing/dimensions

Width x height x depth	mm	170 × 275 × 152	185 × 306 × 203	210 × 393 × 203	478 × 764 × 241
					

Type of mounting	Screw fixing
------------------	--------------

Mounting position	Vertical (can be rotated +/- 90° and tilted +/- 22.5° forward or backward)
-------------------	--

Distance to be maintained with side-by-side mounting							
• Above	mm	100					
• At the side	mm	5					
• Below	mm	75					

Maximum installation altitude above sea level ¹⁾	m	5 000	2 000	5 000	2 000	5 000	2 000
---	---	-------	-------	-------	-------	-------	-------

Degree of protection	IP00
----------------------	------

Ambient conditions

Ambient temperature							
• During operation ²⁾	°C	-25 ... +60					
• During storage and transport	°C	-40 ... +80					

Environmental category according to IEC 60721

• During operation	3K6 (no ice formation, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• During storage	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not enter the devices), 1M4
• During transport	2K2, 2C1, 2S1, 2M2 (max. height of fall 0.3 m)

¹⁾ Derating from 1 000 m, see [characteristic curve on page 7/7](#).

²⁾ Note derating above 40 °C.

Type		3RW55...-HA0.	3RW55...-HA1.
Control circuit/control			
Control supply voltage			
• At AC/DC, rated value	V	24/24	--/--
• At AC	V	--	110 ... 250
• Relative negative tolerance/relative positive tolerance with AC	%	-20/20	-15/10
• Relative negative tolerance/relative positive tolerance with DC	%	-20/20	--/--
Frequency of the control supply voltage			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Type of overvoltage protection			
Type of short-circuit protection for control circuit¹⁾			
Fuse 4 A gG ($I_{cu} = 1$ kA), fuse 6 A quick-response ($I_{cu} = 1$ kA), MCB C1 ($I_{cu} = 600$ A), MCB C6 ($I_{cu} = 300$ A)			

¹⁾ Not included in scope of supply

Type		3RW55...-HA.4	3RW55...-HA.5	3RW55...-HA.6
Power electronics				
Operational voltage, rated value				
• Relative negative tolerance/relative positive tolerance	V	200 ... 480	200 ... 600	200 ... 690
	%	-15/10		
Operational voltage for inside-delta circuit, rated value				
• Relative negative tolerance/relative positive tolerance	V	200 ... 480	200 ... 600	
	%	-15/10		
Operating frequency, rated value				
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60		
	%	-10/10		
Minimum load [% of I_M]¹⁾				
	%	10		
Maximum cable length between soft starter and motor				
	m	800		

¹⁾ Relative to set I_e .

High Performance Soft Starters

3RW55 soft starters > General data

Type		3RW5513	3RW5514	3RW5515	3RW5516	3RW5517
Rated operational current I_e	A	13	18	25	32	38
Power electronics						
Load rating with rated operational current I_e						
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a						
Permissible rated motor current and starts/h						
Normal starting (CLASS 10A)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated						
	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	32/28.4/26	38/33.5/30.5
• 300% I_M						
- Start-up time 5 s	1/h	43	43	43	43	43
- Start-up time 10 s	1/h	18	18	18	18	18
• 350% I_M						
- Start-up time 5 s	1/h	28	28	28	28	28
- Start-up time 10 s	1/h	10	10	10	10	10
Normal starting (CLASS 10E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated						
	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	32/28.4/26	38/33.5/30.5
• 300% I_M						
- Start-up time 5 s	1/h	21	21	21	21	21
- Start-up time 10 s	1/h	8	8	8	8	8
• 350% I_M						
- Start-up time 5 s	1/h	13	13	13	13	13
- Start-up time 10 s	1/h	4	4	4	4	4
Heavy starting (CLASS 20E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated						
	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	29.6/27.2/23.6	33.5/30.5/27.5
• 300% I_M						
- Start-up time 20 s	1/h	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4
• 350% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5
Heavy starting (CLASS 30E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated						
	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	26/23.6/21.2	29/26/23
• 300% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3	3
• 350% I_M						
- Start-up time 20 s	1/h	4	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M						
• Minimum/maximum	A	2.5/13	3.5/18	5/25	6.5/32	7.5/38
• Minimum/maximum in inside-delta circuits	A	4.3/22.5	6.1/31.1	8.7/43.3	11.3/55.4	13/65.8

Type		3RW5521	3RW5524	3RW5525	3RW5526	3RW5527
Rated operational current I_e	A	25	47	63	77	93
Power electronics						
Load rating with rated operational current I_e						
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a	A	25/22.3/19.6	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
Permissible rated motor current and starts/h						
Normal starting (CLASS 10A)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	25/22.3/19.6	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M						
- Start-up time 5 s	1/h	43	43	43	43	43
- Start-up time 10 s	1/h	18	18	18	18	18
• 350% I_M						
- Start-up time 5 s	1/h	28	28	28	28	28
- Start-up time 10 s	1/h	10	10	10	10	10
Normal starting (CLASS 10E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	25/22.3/19.6	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M						
- Start-up time 5 s	1/h	21	21	21	21	21
- Start-up time 10 s	1/h	8	8	8	8	8
• 350% I_M						
- Start-up time 5 s	1/h	13	13	13	13	13
- Start-up time 10 s	1/h	4	4	4	4	4
Heavy starting (CLASS 20E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	25/22.3/19.6	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M						
- Start-up time 20 s	1/h	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4
• 350% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5
Heavy starting (CLASS 30E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	25/22.3/19.6	43.4/38/34.4	53/48/43	68/62/56	82.5/75.5/65
• 300% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3	3
• 350% I_M						
- Start-up time 20 s	1/h	4	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M						
• Minimum/maximum	A	5/25	10/47	13/63	16/77	19/93
• Minimum/maximum in inside-delta circuits	A	8.7/43.3	17.3/81.4	22.5/109	27.7/133	32.9/161

High Performance Soft Starters

3RW55 soft starters > General data

Type		3RW5534	3RW5535	3RW5536
Rated operational current I_e	A	113	143	171
Power electronics				
Load rating with rated operational current I_e				
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	113/101/89	143/128/118	171/153/141
Permissible rated motor current and starts/h				
Normal starting (CLASS 10A)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	143/128/118	171/153/141
• 300% I_M				
- Start-up time 5 s	1/h	43	43	43
- Start-up time 10 s	1/h	18	18	18
• 350% I_M				
- Start-up time 5 s	1/h	28	28	28
- Start-up time 10 s	1/h	10	10	10
Normal starting (CLASS 10E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	143/128/118	171/153/141
• 300% I_M				
- Start-up time 5 s	1/h	21	21	21
- Start-up time 10 s	1/h	8	8	8
• 350% I_M				
- Start-up time 5 s	1/h	13	13	13
- Start-up time 10 s	1/h	4	4	4
Heavy starting (CLASS 20E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	109/97/85	128/113/103	141/129/117
• 300% I_M				
- Start-up time 20 s	1/h	10	10	10
- Start-up time 40 s	1/h	4	4	4
• 350% I_M				
- Start-up time 20 s	1/h	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5
Heavy starting (CLASS 30E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	89/81/74	108/98/88	117/105/93
• 300% I_M				
- Start-up time 20 s	1/h	7	7	7
- Start-up time 40 s	1/h	3	3	3
• 350% I_M				
- Start-up time 20 s	1/h	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8
Adjustable rated motor current I_M				
• Minimum/maximum	A	23/113	29/143	34/171
• Minimum/maximum in inside-delta circuits	A	39.8/195	50.2/247	58.9/296

High Performance Soft Starters

3RW55 soft starters > General data

Type		3RW5543	3RW5544	3RW5545	3RW5546	3RW5547	3RW5548
Rated operational current I_e	A	210	250	315	370	470	570
Power electronics							
Load rating with rated operational current I_e							
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
Permissible rated motor current and starts/h							
Normal starting (CLASS 10A)							
Rated motor current I_M , $T_u = 40/50/60$ °C ON period = 70%; motor protection activated	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
• 300% I_M							
- Start-up time 5 s	1/h	43	43	43	43	40	20
- Start-up time 10 s	1/h	18	18	18	18	17	6
• 350% I_M							
- Start-up time 5 s	1/h	28	28	28	28	26	9
- Start-up time 10 s	1/h	10	10	10	10	10	1
Normal starting (CLASS 10E)							
Rated motor current I_M , $T_u = 40/50/60$ °C ON period = 70%; motor protection activated	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	551/490/445
• 300% I_M							
- Start-up time 5 s	1/h	21	21	21	21	17	8
- Start-up time 10 s	1/h	8	8	8	8	6	1
• 350% I_M							
- Start-up time 5 s	1/h	13	13	13	13	10	2
- Start-up time 10 s	1/h	4	4	4	4	2	--
Heavy starting (CLASS 20E)							
Rated motor current I_M , $T_u = 40/50/60$ °C ON period = 70%; motor protection activated	A	162/146/130	200/180/160	231/207/183	258/230/202	272/254/236	284/262/240
• 300% I_M							
- Start-up time 20 s	1/h	10	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4	4
• 350% I_M							
- Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5	2.5
Heavy starting (CLASS 30E)							
Rated motor current I_M , $T_u = 40/50/60$ °C ON period = 70%; motor protection activated	A	138/122/106	160/140/120	183/159/135	202/174/160	210/190/170	220/200/180
• 300% I_M							
- Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3	3	3
• 350% I_M							
- Start-up time 20 s	1/h	4	4	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M							
• Minimum/maximum	A	42/210	50/250	63/315	74/370	94/470	114/570
• Minimum/maximum in inside-delta circuits	A	72.7/363	86.6/433	109.1/545	128.2/640	162.8/814	197.5/987

High Performance Soft Starters

3RW55 soft starters > General data

Type		3RW5552	3RW5553	3RW5554	3RW5556	3RW5558
Rated operational current I_e	A	630	720	840	1 100	1 280
Power electronics						
Load rating with rated operational current I_e						
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a						
630/561/510 720/641/580 840/748/670 1 100/979/890 1 280/1 139/1 030						
Permissible rated motor current and starts/h						
Normal starting (CLASS 10A)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 630/561/510 720/641/580 840/748/670 1 100/979/890 1 280/1 139/1 030						
• 300% I_M						
- Start-up time 5 s	1/h	43	43	42	43	32
- Start-up time 10 s	1/h	18	18	18	18	12
• 350% I_M						
- Start-up time 5 s	1/h	28	28	25	27	17
- Start-up time 10 s	1/h	10	10	10	9	4
Normal starting (CLASS 10E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 630/561/510 720/641/580 840/748/670 1 100/979/890 1 225/1 130/1 030						
• 300% I_M						
- Start-up time 5 s	1/h	21	21	19	18	15
- Start-up time 10 s	1/h	8	8	7	7	5
• 350% I_M						
- Start-up time 5 s	1/h	13	13	10	9	1
- Start-up time 10 s	1/h	4	4	2	2	1
Heavy starting (CLASS 20E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 500/450/400 520/470/420 570/520/470 920/840/760 980/900/810						
• 300% I_M						
- Start-up time 20 s	1/h	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4
• 350% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5
Heavy starting (CLASS 30E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 380/340/300 400/360/320 420/380/340 740/670/600 790/720/650						
• 300% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3	3
• 350% I_M						
- Start-up time 20 s	1/h	4	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M						
• Minimum/maximum						
A		114/630	144/720	168/840	220/1 100	258/1 280
• Minimum/maximum in inside-delta circuits						
A		197.5/987	249.4/1 247	291/1 454	381.1/1 905	446.9/2 217

High Performance Soft Starters



3RW55 soft starters > General data

Motor feeders according to IEC with 3RV2/3VA motor starter protectors/circuit breakers (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_q in kA, see table

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters	Motor starter protectors for 400 V systems				Motor starter protectors for 500 V systems				
	Q11 Type	Q1 Type	I_q kA	Q1 Type	I_q kA	Q1 Type	I_q kA		
Type of coordination "1" 1	Inline circuit				Inside-delta circuit				
3RW5513	3RV2032-4TA10		65	3RV2032-4TA10	18	3RV2032-4DA10	65	3RV2032-4DA10	18
3RW5514	3RV2032-4DA10		65	3RV2032-4DA10	15	3RV2032-4EA10	65	3RV2032-4EA10	15
3RW5515	3RV2032-4EA10		65	3RV2032-4EA10	15	3RV2032-4VA10	65	3RV2032-4VA10	15
3RW5516	3RV2032-4VA10		65	3RV2032-4VA10	10	3RV2032-4JA10	65	3RV2032-4JA10	10
3RW5517	3RV2032-4WA10		65	3RV2032-4WA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5521	--		--	--	--	--	--	--	--
3RW5524	3RV2032-4JA10		65	3RV2032-4JA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5525	3VA2163-7MN32-0AA0		65	3VA2163-7MN32-0AA0	20	3VA2110-7MN32-0AA0	65	3VA2110-7MN32-0AA0	20
3RW5526	3VA2110-7MN32-0AA0		65	3VA2110-7MN32-0AA0	20	3VA2216-7MN32-0AA0	65	3VA2216-7MN32-0AA0	20
3RW5527	3VA2216-7MN32-0AA0		15	3VA2216-7MN32-0AA0	10	3VA2220-7MN32-0AA0	15	3VA2220-7MN32-0AA0	10
3RW5534	3VA2216-7MN32-0AA0		65	--	--	3VA2220-7MN32-0AA0	65	--	--
3RW5535	3VA2220-7MN32-0AA0		65	--	--	3VA2325-7MN32-0AA0	65	--	--
3RW5536	3VA2325-7MN32-0AA0		30	3VA2325-7MN32-0AA0	10	3VA2440-7MN32-0AA0	30	3VA2440-7MN32-0AA0	10
3RW5543	3VA2325-7MN32-0AA0		65	3VA2325-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5544	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65
3RW5545	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5546	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5547	3VA2450-7MN32-0AA0		65	3VA2450-7MN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65
3RW5548	3VA2580-6HN32-0AA0		65	3VA2580-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65
3RW5552	3VA2580-6HN32-0AA0		65	3VA2580-6HN32-0AA0	65	3VA2716-7AB05-0AA0	65	3VA2716-7AB05-0AA0	65
3RW5553	3VA2510-6HN32-0AA0		65	3VA2510-6HN32-0AA0	65	3VA2716-7AB05-0AA0	65	3VA2716-7AB05-0AA0	65
3RW5554	3VA2510-6HN32-0AA0		65	3VA2510-6HN32-0AA0	65	3VA2716-7AB05-0AA0	65	3VA2716-7AB05-0AA0	65
3RW5556	3VA2716-7AB05-0AA0		65	3VA2716-7AB05-0AA0	65	--	--	--	--
3RW5558	3VA2716-7AB05-0AA0		65	3VA2716-7AB05-0AA0	65	--	--	--	--

Note:

The service factor or measurement inaccuracies have been taken into account, for example, for the selection of the specified motor starter protectors/circuit breakers; the specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

In 690 V systems, in motor feeder tests with soft starters demonstrable short-circuit breaking capacities can only be achieved with the use of fuses ($I_q > 5$ to 10 kA).

High Performance Soft Starters

3RW55 soft starters > General data

Motor feeders according to IEC with 3NA3 fuses

gG class full-range fuses for cable and line protection according to IEC 60269-2, without semiconductor protection

Type of coordination "1",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.

Soft starters	gG class fuse		Line contactor (optional)		gG class fuse		Line contactor (optional)		
	for systems up to 690 V		for systems up to 480 V	for systems up to 690 V	for systems up to 600 V	for systems up to 480 V in the supply cable	for systems up to 600 V in the supply cable	for systems up to 480 V in the delta	for systems up to 600 V in the delta
Q11 Type	F1 Type		Q21 Type	Q21 Type	F1 Type	Q21 Type	Q21 Type	Q21 Type	Q21 Type
Type of coordination "1"	Inline circuit				Inside-delta circuit				
3RW5513	3NA3820-6		3RT2025	3RT2025	3NA3820-6	3RT2027	3RT2035	3RT2025	3RT2025
3RW5514	3NA3820-6		3RT2026	3RT2027	3NA3820-6	3RT2027	3RT2037	3RT2026	3RT2027
3RW5515	3NA3822-6		3RT2027	3RT2037	3NA3822-6	3RT2036	3RT2037	3RT2027	3RT2037
3RW5516	3NA3824-6		3RT2035	3RT2037	3NA3824-6	3RT2037	3RT2038	3RT2035	3RT2037
3RW5517	3NA3824-6		3RT2035	3RT2037	3NA3824-6	3RT2038	3RT2046	3RT2035	3RT2037
3RW5521	3NA3824-6		3RT2027	3RT2037	3NA3824-6	3RT2036	3RT2037	3RT2027	3RT2037
3RW5524	3NA3824-6		3RT2036	3RT2037	3NA3824-6	3RT2046	3RT2047	3RT2036	3RT2037
3RW5525	3NA3830-6		3RT2037	3RT2046	3NA3830-6	3RT2047	3RT1054	3RT2037	3RT2046
3RW5526	3NA3132-6		3RT2038	3RT2046	3NA3132-6	3RT1055	3RT1055	3RT2038	3RT2046
3RW5527	3NA3136-6		3RT2046	3RT2047	3NA3136-6	3RT1056	3RT1056	3RT2046	3RT2047
3RW5534	3NA3244-6		3RT1054	3RT1054	3NA3244-6	3RT1064	3RT1064	3RT1054	3RT1054
3RW5535	3NA3244-6		3RT1055	3RT1055	3NA3244-6	3RT1065	3RT1065	3RT1055	3RT1055
3RW5536	3NA3365-6		3RT1056	3RT1064	3NA3365-6	3RT1066	3RT1075	3RT1056	3RT1064
3RW5543	2 x 3NA3354-6		3RT1064	3RT1064	2 x 3NA3354-6	3RT1075	3RT1075	3RT1064	3RT1064
3RW5544	2 x 3NA3354-6		3RT1065	3RT1065	2 x 3NA3354-6	3RT1076	3RT1076	3RT1065	3RT1065
3RW5545	2 x 3NA3365-6		3RT1075	3RT1075	2 x 3NA3365-6	3TF68	3TF68	3RT1075	3RT1075
3RW5546	2 x 3NA3365-6		3RT1075	3RT1075	2 x 3NA3365-6	3TF69	3TF69	3RT1075	3RT1075
3RW5547	2 x 3NA3365-6		3RT1076	3RT1276	2 x 3NA3365-6	3TF69	3TF69	3RT1076	3RT1276
3RW5548	2 x 3NA3365-6		3TF68	3TF68	2 x 3NA3365-6	--	--	3TF68	3TF68
3RW5552	2 x 3NA3365-6		3TF68	3TF69	--	--	--	3TF68	3TF69
3RW5553	2 x 3NA3365-6		3TF69	3TF69	--	--	--	3TF69	3TF69
3RW5554	2 x 3NA3365-6		--	--	--	--	--	--	--
3RW5556	3 x 3NA3365-6		--	--	--	--	--	--	--
3RW5558	3 x 3NA3365-6		--	--	--	--	--	--	--

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

In inside-delta circuits, motor feeders with soft starters can only be operated in systems with up to 600 V.

High Performance Soft Starters

3RW55 soft starters > General data


Motor feeders according to IEC with 3NE1/3NB3 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gR class fuse	Line contactor (optional)	
Q11	for systems up to 690 V	for systems up to 480 V	for systems up to 690 V
Type	F'1	Q21	Q21
Type	Type	Type	Type
Type of coordination "2"	Inline circuit		
3RW5513	3NE1815-0	3RT2025	3RT2025
3RW5514	3NE1802-0	3RT2026	3RT2027
3RW5515	3NE1817-0	3RT2027	3RT2037
3RW5516	3NE1818-0	3RT2035	3RT2037
3RW5517	3NE1820-0	3RT2035	3RT2037
3RW5521	3NE1817-0	3RT2027	3RT2037
3RW5524	3NE1021-2	3RT2036	3RT2037
3RW5525	3NE1022-0	3RT2037	3RT2046
3RW5526	3NE1224-0	3RT2038	3RT2046
3RW5527	3NE1224-0	3RT2046	3RT2047
3RW5534	3NE1225-0	3RT1054	3RT1054
3RW5535	3NE1227-0	3RT1055	3RT1055
3RW5536	3NE1230-0	3RT1056	3RT1064
3RW5543	3NE1230-2 ¹⁾	3RT1064	3RT1064
3RW5544	3NE1331-0	3RT1065	3RT1065
3RW5545	3NE1334-2	3RT1075	3RT1075
3RW5546	3NE1334-2	3RT1075	3RT1075
3RW5547	3NE1436-2	3RT1076	3RT1276
3RW5548	3NE1437-2	3TF68	3TF68
3RW5552	3NB3350-1KK26	3TF68	3TF69
3RW5553	3NB3351-1KK26	3TF69	3TF69
3RW5554	3NB3351-1KK26	--	--
3RW5556	3NB3354-1KK26	--	--
3RW5558	3NB3357-1KK26	--	--

¹⁾ For systems up to 500 V.

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

In inside-delta circuits, a gR class full-range fuse could not provide the semiconductor protection of the delta-connected soft starter with a short-circuit breaking capacity that is adequate for practical use. In this case, we recommend using aR class partial-range fuses for semiconductor protection for type of coordination "2" ([see page 7/24](#)).

High Performance Soft Starters

3RW55 soft starters > General data

Motor feeders according to IEC with 3NE8 / 3NE3 / 3NC3 fuses

aR class partial-range fuses for semiconductor protection

Type of coordination "2",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

Soft starters	Inline circuit				Inside-delta circuit					
	gG class fuse	aR class fuse	Line contactor (optional)		gG class fuse	aR class fuse	Line contactor (optional)			
Q11 Type	F1	F3	Q21	Q21	F1	F3	Q21	Q21	Q21	Q21
Type of coordination "2"	In-line circuit				Inside-delta circuit					
3RW5513	3NA3820-6	3NE8017-1	3RT2025	3RT2025	3NA3820-6	3NE8017-1	3RT2027	3RT2035	3RT2025	3RT2025
3RW5514	3NA3820-6	3NE8020-1	3RT2026	3RT2027	3NA3820-6	3NE8020-1	3RT2027	3RT2037	3RT2026	3RT2027
3RW5515	3NA3822-6	3NE8021-1	3RT2027	3RT2037	3NA3822-6	3NE8021-1	3RT2036	3RT2037	3RT2027	3RT2037
3RW5516	3NA3824-6	3NE8022-1	3RT2035	3RT2037	3NA3824-6	3NE8022-1	3RT2037	3RT2038	3RT2035	3RT2037
3RW5517	3NA3824-6	3NE8024-1	3RT2035	3RT2037	3NA3824-6	3NE8024-1	3RT2038	3RT2046	3RT2035	3RT2037
3RW5521	3NA3824-6	3NE8021-1	3RT2027	3RT2037	3NA3824-6	3NE8021-1	3RT2036	3RT2037	3RT2027	3RT2037
3RW5524	3NA3824-6	3NE8024-1	3RT2036	3RT2037	3NA3824-6	3NE8024-1	3RT2046	3RT2047	3RT2036	3RT2037
3RW5525	3NA3830-6	3NE3227	3RT2037	3RT2046	3NA3830-6	3NE3227	3RT2047	3RT1054	3RT2037	3RT2046
3RW5526	3NA3132-6	3NE3227	3RT2038	3RT2046	3NA3132-6	3NE3227	3RT1055	3RT1055	3RT2038	3RT2046
3RW5527	3NA3136-6	3NE3227	3RT2046	3RT2047	3NA3136-6	3NE3227	3RT1056	3RT1056	3RT2046	3RT2047
3RW5534	3NA3244-6	3NE3231	3RT1054	3RT1054	3NA3244-6	3NE3231	3RT1064	3RT1064	3RT1054	3RT1054
3RW5535	3NA3244-6	3NE3233	3RT1055	3RT1055	3NA3244-6	3NE3233	3RT1065	3RT1065	3RT1055	3RT1055
3RW5536	3NA3365-6	3NE3334-OB	3RT1056	3RT1064	3NA3365-6	3NE3334-OB	3RT1066	3RT1075	3RT1056	3RT1064
3RW5543	2 x 3NA3354-6	3NE3333	3RT1064	3RT1064	2 x 3NA3354-6	3NE3333	3RT1075	3RT1075	3RT1064	3RT1064
3RW5544	2 x 3NA3354-6	3NE3335	3RT1065	3RT1065	2 x 3NA3354-6	3NE3335	3RT1076	3RT1076	3RT1065	3RT1065
3RW5545	2 x 3NA3365-6	--	3RT1075	3RT1075	2 x 3NA3365-6	--	3TF68	3TF68	3RT1075	3RT1075
3RW5546	2 x 3NA3365-6	--	3RT1075	3RT1075	2 x 3NA3365-6	--	3TF69	3TF69	3RT1075	3RT1075
3RW5547	2 x 3NA3365-6	3NE3340-8	3RT1076	3RT1276	2 x 3NA3365-6	3NE3340-8	3TF69	3TF69	3RT1076	3RT1276
3RW5548	2 x 3NA3365-6	3NC3342-1U	3TF68	3TF68	2 x 3NA3365-6	3NC3342-1U	--	--	3TF68	3TF68
3RW5552	2 x 3NA3365-6	3NC3343-1U	3TF68	3TF69	--	3NC3343-1U	--	--	3TF68	3TF69
3RW5553	2 x 3NA3365-6	3NC3343-1U	3TF69	3TF69	--	3NC3343-1U	--	--	3TF69	3TF69
3RW5554	2 x 3NA3365-6	3NC3343-1U	--	--	--	3NC3343-1U	--	--	--	--
3RW5556	3 x 3NA3365-6	3 x 3NE3340-8	--	--	--	3 x 3NE3340-8	--	--	--	--
3RW5558	3 x 3NA3365-6	3 x 3NE3340-8	--	--	--	3 x 3NE3340-8	--	--	--	--

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3RV2/3VA motor starter protectors/circuit breakers can also be used, possibly with reduced short-circuit breaking capacity (see page 7/21). In these cases, optional line contactors can be dispensed with.

In inside-delta circuits, motor feeders with soft starters can only be operated in systems with up to 600 V.

High Performance Soft Starters

3RW55 soft starters > General data

Reversing operation with reversing contactors

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

(For an example circuit, [see 3RW55 Equipment Manual, Appendix A.3](#))

Soft starters	Reversing contactor assembly		For reversing contactor	
	for systems up to 480 V	for systems up to 690 V	for systems up to 480 V	for systems up to 690 V
Q11	Q21 / Q22	Q21 / Q22	Q21 / Q22	Q21 / Q22
Type	Type	Type	Type	Type
3RW5513	3RA2325	3RA2325	3RT2025	3RT2025
3RW5514	3RA2326	3RA2327	3RT2026	3RT2027
3RW5515	3RA2327	3RA2337	3RT2027	3RT2037
3RW5516	3RA2335	3RA2337	3RT2035	3RT2037
3RW5517	3RA2335	3RA2337	3RT2035	3RT2037
3RW5521	3RA2327	3RA2337	3RT2027	3RT2037
3RW5524	3RA2336	3RA2337	3RT2036	3RT2037
3RW5525	3RA2337	3RA2346	3RT2037	3RT2046
3RW5526	3RA2338	3RA2346	3RT2038	3RT2046
3RW5527	3RA2346	3RA2347	3RT2046	3RT2047
3RW5534	--	--	3RT1054	3RT1054
3RW5535	--	--	3RT1055	3RT1055
3RW5536	--	--	3RT1056	3RT1064
3RW5543	--	--	3RT1064	3RT1064
3RW5544	--	--	3RT1065	3RT1065
3RW5545	--	--	3RT1075	3RT1075
3RW5546	--	--	3RT1075	3RT1075
3RW5547	--	--	3RT1076	3RT1276
3RW5548	--	--	3TF68	3TF68
3RW5552	--	--	3TF68	3TF69
3RW5553	--	--	3TF69	3TF69
3RW5554	--	--	--	--
3RW5556	--	--	--	--
3RW5558	--	--	--	--

DC braking with braking contactors

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

(For an example circuit, [see 3RW55 Equipment Manual, Appendix A.3](#))

Soft starters	DC braking contactor	DC braking contactor assembly		for systems up to 690 V	
	for systems up to 400 V	for systems up to 480 V		for systems up to 690 V	
Q11	with 2 NC contacts + 2 NO contacts parallel	with 3 NO contacts parallel	with 3 NO contacts parallel	with 3 NO contacts parallel	with 3 NO contacts parallel
Type	Q93	Q91	Q92	Q91	Q92
Type	Type	Type	Type	Type	Type
3RW5513	3RT2517	3RT2015	3RT2016	3RT2015	3RT2016
3RW5514	3RT2518	3RT2015	3RT2017	3RT2015	3RT2023
3RW5515	3RT2526	3RT2015	3RT2025	3RT2015	3RT2025
3RW5516	3RT2526	3RT2015	3RT2025	3RT2015	3RT2027
3RW5517	3RT2535	3RT2015	3RT2027	3RT2015	3RT2027
3RW5521	3RT2526	3RT2015	3RT2025	3RT2015	3RT2025
3RW5524	3RT2535	3RT2016	3RT2027	3RT2016	3RT2035
3RW5525	--	3RT2024	3RT2027	3RT2024	3RT2037
3RW5526	--	3RT2025	3RT2035	3RT2025	3RT2037
3RW5527	--	3RT2027	3RT2036	3RT2027	3RT2037
3RW5534	--	3RT2035	3RT2037	3RT2035	3RT2038
3RW5535	--	3RT2036	3RT2038	3RT2036	3RT2046
3RW5536	--	3RT2037	3RT2046	3RT2037	3RT2047
3RW5543	--	3RT2045	3RT2047	3RT2045	3RT1054
3RW5544	--	3RT2045	3RT1055	3RT2045	3RT1055
3RW5545	--	3RT2446	3RT1056	3RT2446	3RT1056
3RW5546	--	3RT1055	3RT1056	3RT1055	3RT1064
3RW5547	--	3RT1456	3RT1065	3RT1456	3RT1065
3RW5548	--	3RT1456	3RT1066	3RT1456	3RT1075
3RW5552	--	3RT1065	3RT1075	3RT1065	3RT1075
3RW5553	--	3RT1065	3RT1075	3RT1065	3RT1075
3RW5554	--	3RT1466	3RT1076	3RT1466	3RT1076
3RW5556	--	3RT1476	3TF68	3RT1476	3TF68
3RW5558	--	3RT1476	3TF69	3RT1476	3TF69

High Performance Soft Starters

3RW55 soft starters > Inline circuit **IE3/IE4 ready**

Selection and ordering data

For normal starting (CLASS 10E)



3RW551.




3RW552.

At 40 °C					SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*				
Operational current	Operating power for three-phase motors									Rating [hp] for three-phase motors			
	At 230 V	At 400 V	At 500 V	At 690 V						At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V
A	kW	kW	kW	kW	hp	hp	hp	hp	d				
Operational voltage 200 ... 480 V													
13	3	5.5	--	--	3	3	7.5	--	5	3RW5513-□HA□4	1	1 unit	
18	4	7.5	--	--	5	5	10	--	5	3RW5514-□HA□4	1	1 unit	
25	5.5	11	--	--	5	7.5	15	--	5	3RW5515-□HA□4	1	1 unit	
32	7.5	15	--	--	7.5	10	20	--	5	3RW5516-□HA□4	1	1 unit	
38	11	18.5	--	--	10	10	25	--	5	3RW5517-□HA□4	1	1 unit	
47	11	22	--	--	10	15	30	--	5	3RW5524-□HA□4	1	1 unit	
63	18.5	30	--	--	20	20	40	--	5	3RW5525-□HA□4	1	1 unit	
77	22	37	--	--	20	25	60	--	5	3RW5526-□HA□4	1	1 unit	
93	22	45	--	--	30	30	60	--	5	3RW5527-□HA□4	1	1 unit	

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals



Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.

High Performance Soft Starters

3RW55 soft starters > Inline circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW553.



3RW554.



3RW555.

At 40 °C		Rating [hp] for three-phase motors								SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors													
	At 230 V	At 400 V	At 500 V	At 690 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d					
A	kW	kW	kW	kW	hp	hp	hp	hp						
Operational voltage 200 ... 480 V														
113	30	55	--	--	30	40	75	--	5				1	1 unit
143	37	75	--	--	40	50	100	--	5				1	1 unit
171	45	90	--	--	50	60	125	--	5				1	1 unit
210	55	110	--	--	60	75	150	--	5				1	1 unit
250	75	132	--	--	75	100	200	--	5				1	1 unit
315	90	160	--	--	100	125	250	--	5				1	1 unit
370	110	200	--	--	125	150	300	--	5				1	1 unit
470	132	250	--	--	150	150	350	--	5				1	1 unit
570	160	315	--	--	200	200	450	--	5				1	1 unit
630	200	355	--	--	200	250	500	--	15				1	1 unit
720	200	400	--	--	250	250	600	--	15				1	1 unit
840	250	450	--	--	300	350	700	--	15				1	1 unit
1 100	315	560	--	--	350	450	950	--	15				1	1 unit
1 280	400	710	--	--	400	550	1 100	--	15				1	1 unit

Type of electrical connection for the control circuit

Spring-loaded terminals
Screw terminals

Control supply voltage

24 V AC/DC
110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V:
Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inline circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW551.



3RW552.

At 40 °C										SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors				Rating [hp] for three-phase motors				A					
	At 230 V	At 400 V	At 500 V	At 690 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V		hp				
	kW	kW	kW	kW	hp	hp	hp	hp	d					
Operational voltage 200 ... 600 V														
13	3	5.5	7.5	--	3	3	7.5	10	5				1	1 unit
18	4	7.5	11	--	5	5	10	15	5				1	1 unit
25	5.5	11	15	--	5	7.5	15	20	5				1	1 unit
32	7.5	15	18.5	--	7.5	10	20	30	5				1	1 unit
38	11	18.5	22	--	10	10	25	30	5				1	1 unit
Operational voltage 200 ... 690 V														
25	5.5	11	15	22	5	7.5	15	20	5				1	1 unit
47	11	22	30	45	10	15	30	40	5				1	1 unit
63	18.5	30	37	55	20	20	40	60	5				1	1 unit
77	22	37	45	75	20	25	60	75	5				1	1 unit
93	22	45	55	90	30	30	60	75	5				1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals


Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 690 V: Standard delivery time SD = 2 days (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inline circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW553.



3RW554.



3RW555.

At 40 °C					SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*				
Operational current	Operating power for three-phase motors									Rating [hp] for three-phase motors			
	At 230 V	At 400 V	At 500 V	At 690 V						At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V
A	kW	kW	kW	kW	hp	hp	hp	hp	d				
Operational voltage 200 ... 690 V													
113	30	55	75	110	30	40	75	100	5	3RW5534-□HA□6	1	1 unit	
143	37	75	90	132	40	50	100	125	5	3RW5535-□HA□6	1	1 unit	
171	45	90	110	160	50	60	125	150	5	3RW5536-□HA□6	1	1 unit	
210	55	110	132	200	60	75	150	200	5	3RW5543-□HA□6	1	1 unit	
250	75	132	160	250	75	100	200	250	5	3RW5544-□HA□6	1	1 unit	
315	90	160	200	315	100	125	250	300	5	3RW5545-□HA□6	1	1 unit	
370	110	200	250	355	125	150	300	350	5	3RW5546-□HA□6	1	1 unit	
470	132	250	315	400	150	150	350	450	5	3RW5547-□HA□6	1	1 unit	
570	160	315	355	560	200	200	450	600	5	3RW5548-□HA□6	1	1 unit	
630	200	355	400	630	200	250	500	700	15	3RW5552-□HA□6	1	1 unit	
720	200	400	500	710	250	250	600	800	15	3RW5553-□HA□6	1	1 unit	
840	250	450	560	800	300	350	700	900	15	3RW5554-□HA□6	1	1 unit	
1 100	215	560	710	1 000	350	450	950	1 250	15	3RW5556-□HA□6	1	1 unit	
1 280	400	710	900	1 200	400	550	1 100	1 450	15	3RW5558-□HA□6	1	1 unit	

Type of electrical connection for the control circuit

Spring-loaded terminals
Screw terminals


Control supply voltage

24 V AC/DC
110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 690 V:
- Sizes 3 and 4: Standard delivery time SD = 2 days (d).
- Size 5: Standard delivery time SD = 5 days (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inside-delta circuit **IE3/IE4 ready**

Selection and ordering data

For normal starting (CLASS 10E)



3RW551.



3RW552.

At 40 °C for inside-delta circuit				SD ¹⁾				Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			Rating [hp] for three-phase motors							
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d			
A	kW	kW	kW	hp	hp	hp	hp				
Operational voltage 200 ... 480 V											
22.5	5.5	11	--	5	7.5	15	--	5	3RW5513-□HA□4	1	1 unit
31.5	7.5	15	--	7.5	10	20	--	5	3RW5514-□HA□4	1	1 unit
43.3	11	18.5	--	10	15	30	--	5	3RW5515-□HA□4	1	1 unit
55.4	15	22	--	15	20	40	--	5	3RW5516-□HA□4	1	1 unit
65.8	18.5	30	--	20	20	50	--	5	3RW5517-□HA□4	1	1 unit
81.4	22	45	--	25	30	60	--	5	3RW5524-□HA□4	1	1 unit
109	30	55	--	30	40	75	--	5	3RW5525-□HA□4	1	1 unit
133	37	75	--	40	50	100	--	5	3RW5526-□HA□4	1	1 unit
161	45	90	--	50	60	125	--	5	3RW5527-□HA□4	1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inside-delta circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW553.



3RW554.



3RW555.

At 40 °C for inside-delta circuit								SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			Rating [hp] for three-phase motors				d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
196	55	110	--	60	75	150	--	5	3RW5534-□HA□4		1	1 unit
248	75	132	--	75	75	200	--	5	3RW5535-□HA□4		1	1 unit
296	90	160	--	100	100	200	--	5	3RW5536-□HA□4		1	1 unit
364	110	200	--	125	150	300	--	5	3RW5543-□HA□4		1	1 unit
433	132	250	--	150	150	350	--	5	3RW5544-□HA□4		1	1 unit
546	160	315	--	150	200	450	--	5	3RW5545-□HA□4		1	1 unit
641	200	355	--	200	250	500	--	5	3RW5546-□HA□4		1	1 unit
814	250	400	--	250	300	700	--	5	3RW5547-□HA□4		1	1 unit
987	315	560	--	350	400	850	--	5	3RW5548-□HA□4		1	1 unit
1 091	355	630	--	350	450	950	--	15	3RW5552-□HA□4		1	1 unit
1 247	400	710	--	400	500	1 100	--	15	3RW5553-□HA□4		1	1 unit
1 454	450	800	--	500	600	1 300	--	15	3RW5554-□HA□4		1	1 unit
1 905	560	1 000	--	650	800	1 700	--	15	3RW5556-□HA□4		1	1 unit
2 217	710	1 200	--	800	950	1 900	--	15	3RW5558-□HA□4		1	1 unit

Type of electrical connection for the control circuit

- Spring-loaded terminals
- Screw terminals


Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inside-delta circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW551.



3RW552.

At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors											
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp	d				
Operational voltage 200 ... 600 V												
22.5	5.5	11	15	5	7.5	15	20	5	3RW5513-□HA□5		1	1 unit
31.5	7.5	15	18.5	7.5	10	20	25	5	3RW5514-□HA□5		1	1 unit
43.3	11	18.5	22	10	15	30	40	5	3RW5515-□HA□5		1	1 unit
55.4	15	22	30	15	20	40	50	5	3RW5516-□HA□5		1	1 unit
65.8	18.5	30	37	20	20	50	60	5	3RW5517-□HA□5		1	1 unit
43.3	11	18.5	22	10	15	30	40	5	3RW5521-□HA□6		1	1 unit
81.4	22	45	45	25	30	60	75	5	3RW5524-□HA□6		1	1 unit
109	30	55	55	30	40	75	100	5	3RW5525-□HA□6		1	1 unit
133	37	75	90	40	50	100	125	5	3RW5526-□HA□6		1	1 unit
161	45	90	110	50	60	125	150	5	3RW5527-□HA□6		1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals


Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 600 V: Standard delivery time SD = 2 days (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 soft starters > Inside-delta circuit **IE3/IE4 ready**

For normal starting (CLASS 10E)



3RW553.



3RW554.



3RW555.

At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors							d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
196	55	110	132	60	75	150	200	5	3RW5534-□HA□6		1	1 unit
248	75	132	160	75	75	200	250	5	3RW5535-□HA□6		1	1 unit
296	90	160	200	100	100	200	300	5	3RW5536-□HA□6		1	1 unit
364	110	200	250	125	150	300	350	5	3RW5543-□HA□6		1	1 unit
433	132	250	315	150	150	350	450	5	3RW5544-□HA□6		1	1 unit
546	160	315	355	150	200	450	550	5	3RW5545-□HA□6		1	1 unit
641	200	355	450	200	250	500	700	5	3RW5546-□HA□6		1	1 unit
814	250	400	500	250	300	700	900	5	3RW5547-□HA□6		1	1 unit
987	315	560	630	350	400	850	1 100	5	3RW5548-□HA□6		1	1 unit
1 091	355	630	710	350	450	950	1 200	15	3RW5552-□HA□6		1	1 unit
1 247	400	710	800	400	500	1 100	1 400	15	3RW5553-□HA□6		1	1 unit
1 454	450	800	900	500	600	1 300	1 600	15	3RW5554-□HA□6		1	1 unit
1 905	560	1 000	1 200	650	800	1 700	2 100	15	3RW5556-□HA□6		1	1 unit
2 217	710	1 200	1 500	800	950	1 900	2 500	15	3RW5558-□HA□6		1	1 unit

Type of electrical connection for the control circuit

Spring-loaded terminals
Screw terminals


Control supply voltage

24 V AC/DC
110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 600 V:
 - Sizes 3 and 4: Standard delivery time SD = 2 days (d).
 - Size 5: Standard delivery time SD = 5 days (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters






3RW55 soft starters > Accessories

Selection and ordering data

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fan covers								
	Fan cover	3RW551 (1x), 3RW552 (2x), 3RW553 (2x)	--	--	▶	3RW5983-0FC00	1	1 unit
3RW5983-0FC00		3RW554 (1x)	--	--	▶	3RW5984-0FC00	1	1 unit
		3RW555 (3x)	--	--	▶	3RW5985-0FC00	1	1 unit
Terminal covers								
	Terminal cover	3RW552 (2x), 3RW553 (2x)	--	--	▶	3RW5983-0TC20	1	1 unit
3RW5983-0TC20		3RW554 (2x)	--	--	▶	3RW5984-0TC20	1	1 unit
								
3RW5984-0TC20								
Enclosure components								
	Hinged cover	3RW55	Without cutout	--	▶	3RW5950-0GL20	1	1 unit
3RW5950-0GL20								
Communication modules								
	Communication module	3RW55	PROFINET High Feature with integral switch	--	▶	3RW5950-0CH00	1	1 unit
3RW5980-0CS00			PROFINET Standard	--	▶	3RW5980-0CS00	1	1 unit
			PROFIBUS	--	▶	3RW5980-0CP00	1	1 unit
			EtherNet/IP	--	▶	3RW5980-0CE00	1	1 unit
3RW5980-0CE00								
			Modbus RTU	--	▶	3RW5980-0CR00	1	1 unit
3RW5980-0CR00			Modbus TCP	--	▶	3RW5980-0CT00	1	1 unit

High Performance Soft Starters

3RW55 soft starters > Accessories

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
HMI modules								
	IP65 door mounting kit for HMI modules	3RW55	IP65	For HMI modules	▶	3RW5980-0HD00	1	1 unit
3RW5980-0HD00								
Connecting cables								
	HMI connection cable	3RW55	5 m, round	For door mounting	▶	3RW5980-0HC60	1	1 unit
			2.5 m, round		▶	3UF7933-0BA00-0	1	1 unit
			1.0 m, round		▶	3UF7937-0BA00-0	1	1 unit
			0.5 m, round		▶	3UF7932-0BA00-0	1	1 unit
3UF793.-0BA00-0								
Further accessories								
	Push-in lugs for wall mounting	--	Two lugs are required per device	For HMI modules and communication modules	2	3ZY1311-0AA00	1	10 units
3ZY1311-0AA00								
Blank labels								
	Unit labeling plates¹⁾		20 mm x 7 mm, titanium gray	For SIRIUS devices	20	3RT2900-1SB20	100	340 units
3RT2900-1SB20								
3RW55 starter kit								
	SIRIUS 3RW55 starter kit	--	Including 3RW55 soft starter 13 A, 200 ... 480 V, 24 V AC/DC Soft Starter ES V15.1, 24 V power supply unit, connecting cable and RJ45 network cable		5	3RW5951-1ES04	1	1 unit
3RW5951-1ES04								

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Overview

More information


Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW
 Industry Online Support (SIOS) topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109747404>

Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>
 SIRIUS Soft Starter ES (TIA Portal), see page 7/7



Equipped with the utmost functionality, the SIRIUS 3RW55 Failsafe High Performance soft starters confidently handle even difficult starting and stopping operations. Thanks to innovative torque control, the device can be used for drives with an output of between 7.5 to 450HP @ 480V.

The innovative 3RW55 Failsafe soft starter features an integrated fail-safe digital input for directly connecting the EMERGENCY STOP, and thus covers SIL 1 STO applications. The HMI (with color display, local interface and a slot for micro SD memory card) and plug-in communication modules (PROFINET, PROFIBUS, EtherNet/IP and Modbus) ensure maximum flexibility. With their modern hybrid switching technology, the 3RW55 Failsafe soft starters offer efficient switching for long-term, energy-saving use.

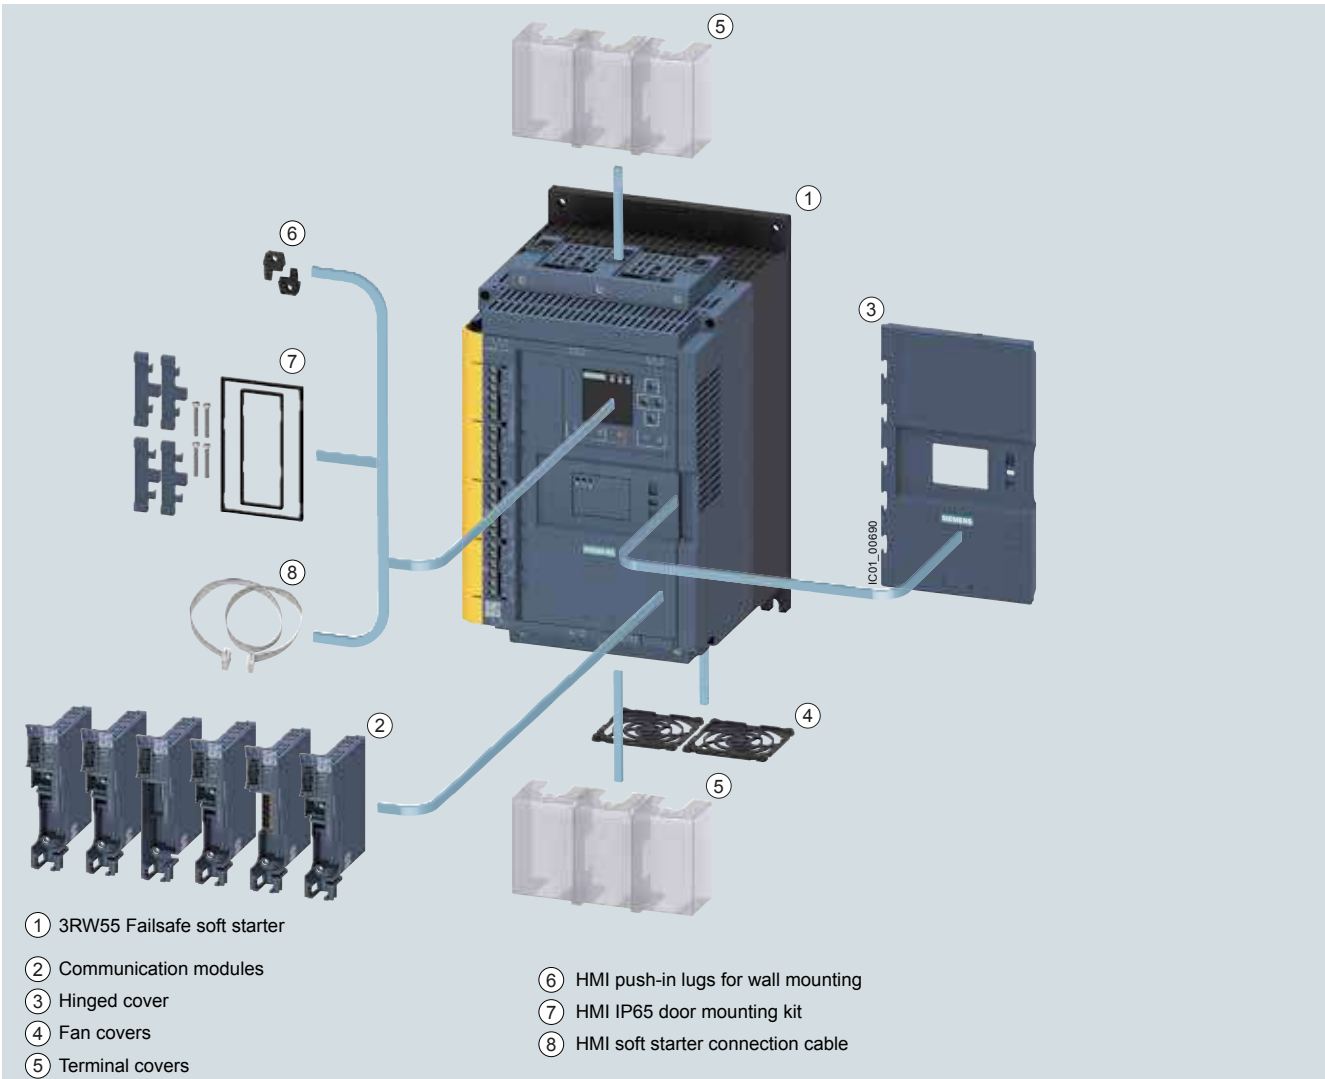

- ① 3RW55 Failsafe soft starter
- ② Communication modules
- ③ Hinged cover
- ④ Fan covers
- ⑤ Terminal covers
- ⑥ HMI push-in lugs for wall mounting
- ⑦ HMI IP65 door mounting kit
- ⑧ HMI soft starter connection cable

3RW55 Failsafe High Performance soft starters with accessories, see page 7/51.

Benefits




Product characteristics / function	Performance features / benefits
Automatic parameterization	Extremely easy commissioning and reliability even under changing load conditions
Hybrid switching devices and three-phase motor control	Minimum power loss and optimum/symmetrical motor control
Integration into TIA Portal – communication modules optional	Efficient configuration and maximum flexibility in automation engineering
Removable HMI with color display, local interface, slot for micro SD memory card	Maximum flexibility with regard to user interface and intuitive menu guidance
Pump stop and torque control	Reduced mechanical loading and optimum pump stop control
Certified according to ATEX/IECEX directive	Suitable for the starting of explosion-proof motors
Fail-safe disconnection up to SIL 3 - PL e / STO	Reduced costs and space requirements thanks to direct wiring of the EMERGENCY STOP mushroom pushbutton to the soft starter for SIL 1

Technical specifications

More information

Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/25776/td>
Equipment Manual "SIRIUS 3RW55 Soft Starter", see <https://support.industry.siemens.com/cs/ww/en/view/109753752>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/25776/faq>
Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

Type		3RW551.-.HF.4	3RW552.-.HF.4 3RW553.-.HF.4	3RW554.-.HF.4
Installation/fixing/dimensions				
Width x height x depth	 mm	170 × 275 × 152	185 × 306 × 203	210 × 393 × 203
Type of mounting	Screw fixing			
Mounting position	Vertical (can be rotated +/- 90° and tilted +/- 22.5° forward or backward)			
Distance to be maintained with side-by-side mounting				
• Above	mm	100		
• At the side	mm	5		
• Below	mm	75		
Maximum installation altitude above sea level¹⁾	m	2 000		
Degree of protection		IP00		
Ambient conditions				
Ambient temperature				
• During operation ²⁾	°C	-25 ... +60		
• During storage and transport	°C	-40 ... +80		
Environmental category according to IEC 60721				
• During operation		3K6 (no ice formation, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6		
• During storage		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not enter the devices), 1M4		
• During transport		2K2, 2C1, 2S1, 2M2 (max. height of fall 0.3 m)		

¹⁾ Derating from 1 000 m, see [characteristic curve on page 7/7](#).

²⁾ Note derating above 40 °C.

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Type		3RW55..-HF0.	3RW55..-HF1.
Control circuit/control			
Control supply voltage			
• At AC/DC, rated value	V	24/24	--/--
• At AC	V	--	110 ... 250
• Relative negative tolerance/relative positive tolerance with AC	%	-20/20	-15/10
• Relative negative tolerance/relative positive tolerance with DC	%	-20/20	--/--
Frequency of the control supply voltage			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Type of overvoltage protection			
Varistors			
Type of short-circuit protection for control circuit¹⁾			
Fuse 4 A gG ($I_{CU} = 1$ kA), fuse 6 A quick-response ($I_{CU} = 1$ kA), MCB C1 ($I_{CU} = 600$ A), MCB C6 ($I_{CU} = 300$ A)			

¹⁾ Not included in scope of supply

Type		3RW55..-HF4
Power electronics		
Operational voltage, rated value		
• Relative negative tolerance/relative positive tolerance	V	200 ... 480
	%	-15/10
Operational voltage for inside-delta circuit, rated value		
• Relative negative tolerance/relative positive tolerance	V	200 ... 480
	%	-15/10
Operating frequency, rated value		
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60
	%	-10/10
Minimum load [% of I_M]¹⁾		
	%	10
Maximum cable length between soft starter and motor		
	m	800

¹⁾ Relative to set I_e .

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Type		3RW5513	3RW5514	3RW5515	3RW5516	3RW5517
Rated operational current I_e	A	13	18	25	32	38
Power electronics						
Load rating with rated operational current I_e						
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a						
13/11.5/10.5 18/15.9/13.8 25/22.3/19.6 25/22.3/19.6 38/33.5/30.5						
Permissible rated motor current and starts/h						
Normal starting (CLASS 10A)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 13/11.5/10.5 18/15.9/13.8 25/22.3/19.6 32/28.4/26 38/33.5/30.5						
• 300% I_M						
- Start-up time 5 s						
- Start-up time 10 s						
1/h 43 43 43 43 43						
1/h 18 18 18 18 18						
• 350% I_M						
- Start-up time 5 s						
- Start-up time 10 s						
1/h 28 28 28 28 28						
1/h 10 10 10 10 10						
Normal starting (CLASS 10E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 13/11.5/10.5 18/15.9/13.8 25/22.3/19.6 32/28.4/26 38/33.5/30.5						
• 300% I_M						
- Start-up time 5 s						
- Start-up time 10 s						
1/h 21 21 21 21 21						
1/h 8 8 8 8 8						
• 350% I_M						
- Start-up time 5 s						
- Start-up time 10 s						
1/h 13 13 13 13 13						
1/h 4 4 4 4 4						
Heavy starting (CLASS 20E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 13/11.5/10.5 18/15.9/13.8 25/22.3/19.6 29.6/27.2/23.6 33.5/30.5/27.5						
• 300% I_M						
- Start-up time 20 s						
- Start-up time 40 s						
1/h 10 10 10 10 10						
1/h 4 4 4 4 4						
• 350% I_M						
- Start-up time 20 s						
- Start-up time 40 s						
1/h 7 7 7 7 7						
1/h 2.5 2.5 2.5 2.5 2.5						
Heavy starting (CLASS 30E)						
Rated motor current I_M , $T_U = 40/50/60$ °C						
ON period = 70%; motor protection activated						
A 13/11.5/10.5 18/15.9/13.8 25/22.3/19.6 26/23.6/21.2 29/26/23						
• 300% I_M						
- Start-up time 20 s						
- Start-up time 40 s						
1/h 7 7 7 7 7						
1/h 3 3 3 3 3						
• 350% I_M						
- Start-up time 20 s						
- Start-up time 40 s						
1/h 4 4 4 4 4						
1/h 1.8 1.8 1.8 1.8 1.8						
Adjustable rated motor current I_M						
• Minimum/maximum						
A 2.5/13 3.5/18 5/25 6.5/32 7.5/38						
• Minimum/maximum in inside-delta circuits						
A 4.3/22.5 6.1/31.1 8.7/43.3 11.3/55.4 13/65.8						

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Type		3RW5524	3RW5525	3RW5526	3RW5527
Rated operational current I_e	A	47	63	77	93
Power electronics					
Load rating with rated operational current I_e					
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a		47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
Permissible rated motor current and starts/h					
Normal starting (CLASS 10A)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M					
- Start-up time 5 s	1/h	43	43	43	43
- Start-up time 10 s	1/h	18	18	18	18
• 350% I_M					
- Start-up time 5 s	1/h	28	28	28	28
- Start-up time 10 s	1/h	10	10	10	10
Normal starting (CLASS 10E)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M					
- Start-up time 5 s	1/h	21	21	21	21
- Start-up time 10 s	1/h	8	8	8	8
• 350% I_M					
- Start-up time 5 s	1/h	13	13	13	13
- Start-up time 10 s	1/h	4	4	4	4
Heavy starting (CLASS 20E)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M					
- Start-up time 20 s	1/h	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4
• 350% I_M					
- Start-up time 20 s	1/h	7	7	7	7
- Start-up time 40 s	1/h	2.5	0	0	0
Heavy starting (CLASS 30E)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	43.4/38/34.4	53/48/43	68/62/56	82.5/75.5/65
• 300% I_M					
- Start-up time 20 s	1/h	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3
• 350% I_M					
- Start-up time 20 s	1/h	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M					
• Minimum/maximum	A	10/47	13/63	16/77	19/93
• Minimum/maximum in inside-delta circuits	A	17.3/81.4	22.5/109	27.7/133	32.9/161

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Type		3RW5534	3RW5535	3RW5536
Rated operational current I_e	A	113	143	171
Power electronics				
Load rating with rated operational current I_e				
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	113/101/89	143/128/118	171/153/141
Permissible rated motor current and starts/h				
Normal starting (CLASS 10A)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	143/128/118	171/153/141
• 300% I_M				
- Start-up time 5 s	1/h	43	43	35
- Start-up time 10 s	1/h	18	18	13
• 350% I_M				
- Start-up time 5 s	1/h	28	17	10
- Start-up time 10 s	1/h	10	4	0
Normal starting (CLASS 10E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	143/128/118	171/153/141
• 300% I_M				
- Start-up time 5 s	1/h	21	21	14
- Start-up time 10 s	1/h	8	7	4
• 350% I_M				
- Start-up time 5 s	1/h	13	4	0
- Start-up time 10 s	1/h	4	0	0
Heavy starting (CLASS 20E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	109/97/85	128/113/103	141/129/117
• 300% I_M				
- Start-up time 20 s	1/h	10	10	10
- Start-up time 40 s	1/h	4	4	4
• 350% I_M				
- Start-up time 20 s	1/h	7	6	6
- Start-up time 40 s	1/h	0	0	0
Heavy starting (CLASS 30E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	89/81/74	108/98/88	117/105/93
• 300% I_M				
- Start-up time 20 s	1/h	7	7	7
- Start-up time 40 s	1/h	3	3	3
• 350% I_M				
- Start-up time 20 s	1/h	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8
Adjustable rated motor current I_M				
• Minimum/maximum	A	23/113	29/143	34/171
• Minimum/maximum in inside-delta circuits	A	39.8/195	50.2/247	58.9/296

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Type		3RW5543	3RW5544	3RW5545	3RW5546	3RW5547	3RW5548
Rated operational current I_e	A	210	250	315	370	470	570
Power electronics							
Load rating with rated operational current I_e							
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a		210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
Permissible rated motor current and starts/h							
Normal starting (CLASS 10A)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
• 300% I_M							
- Start-up time 5 s	1/h	43	43	38	43	32	13
- Start-up time 10 s	1/h	13	18	14	18	13	3
• 350% I_M							
- Start-up time 5 s	1/h	14	28	19	28	19	4
- Start-up time 10 s	1/h	0	10	5	10	6	0.4
Normal starting (CLASS 10E)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	551/490/445
• 300% I_M							
- Start-up time 5 s	1/h	13	21	14	20	13	5
- Start-up time 10 s	1/h	2	8	4	8	3	--
• 350% I_M							
- Start-up time 5 s	1/h	0	13	5	12	6	1
- Start-up time 10 s	1/h	0	4	0	3	0.4	--
Heavy starting (CLASS 20E)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	162/146/130	200/180/160	231/207/183	258/230/202	272/254/236	284/262/240
• 300% I_M							
- Start-up time 20 s	1/h	10	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4	4
• 350% I_M							
- Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	2	2.5	2.5	2.5	2.5	2.5
Heavy starting (CLASS 30E)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	138/122/106	160/140/120	183/159/135	202/174/160	210/190/170	220/200/180
• 300% I_M							
- Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	3	3	3	3	3	3
• 350% I_M							
- Start-up time 20 s	1/h	4	4	4	4	4	4
- Start-up time 40 s	1/h	1.8	1.8	1.8	1.8	1.8	1.8
Adjustable rated motor current I_M							
• Minimum/maximum	A	42/210	50/250	63/315	74/370	94/470	114/570
• Minimum/maximum in inside-delta circuits	A	72.7/363	86.6/433	109.1/545	128.2/640	162.8/814	197.5/987

High Performance Soft Starters



3RW55 Failsafe soft starters > General data **NEW**

Motor feeders according to IEC with 3RV2/3VA motor starter protectors/circuit breakers (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_q in kA, see table

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters	Motor starter protectors for 400 V systems				Motor starter protectors for 480 V systems				
	Q11 Type	Q1 Type	I_q kA	Q1 Type	I_q kA	Q1 Type	I_q kA	Q1 Type	I_q kA
Type of coordination "1"	Inline circuit				Inside-delta circuit				
3RW5513	3RV2032-4TA10		65	3RV2032-4TA10	18	3RV2032-4DA10	65	3RV2032-4DA10	18
3RW5514	3RV2032-4DA10		65	3RV2032-4DA10	15	3RV2032-4EA10	65	3RV2032-4EA10	15
3RW5515	3RV2032-4EA10		65	3RV2032-4EA10	15	3RV2032-4VA10	65	3RV2032-4VA10	15
3RW5516	3RV2032-4VA10		65	3RV2032-4VA10	10	3RV2032-4JA10	65	3RV2032-4JA10	10
3RW5517	3RV2032-4WA10		65	3RV2032-4WA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5524	3RV2032-4JA10		65	3RV2032-4JA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5525	3VA2163-7MN32-0AA0		65	3VA2163-7MN32-0AA0	20	3VA2110-7MN32-0AA0	65	3VA2110-7MN32-0AA0	20
3RW5526	3VA2110-7MN32-0AA0		65	3VA2110-7MN32-0AA0	20	3VA2216-7MN32-0AA0	65	3VA2216-7MN32-0AA0	20
3RW5527	3VA2216-7MN32-0AA0		15	3VA2216-7MN32-0AA0	10	3VA2220-7MN32-0AA0	15	3VA2220-7MN32-0AA0	10
3RW5534	3VA2216-7MN32-0AA0		65	--	--	3VA2220-7MN32-0AA0	65	--	--
3RW5535	3VA2220-7MN32-0AA0		65	--	--	3VA2325-7MN32-0AA0	65	--	--
3RW5536	3VA2325-7MN32-0AA0		30	3VA2325-7MN32-0AA0	10	3VA2440-7MN32-0AA0	30	3VA2440-7MN32-0AA0	10
3RW5543	3VA2325-7MN32-0AA0		65	3VA2325-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5544	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65
3RW5545	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5546	3VA2440-7MN32-0AA0		65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5547	3VA2450-7MN32-0AA0		65	3VA2450-7MN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65
3RW5548	3VA2580-6HN32-0AA0		65	3VA2580-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65

Note:

The service factor or measurement inaccuracies have been taken into account, for example, for the selection of the specified motor starter protectors/circuit breakers; the specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Motor feeders according to IEC with 3NA3 fuses

gG class full-range fuses for cable and line protection according to IEC 60269-2, without semiconductor protection

Type of coordination "1",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

Soft starters	Inline circuit		Inside-delta circuit		
	gG class fuse	Line contactor (optional)	gG class fuse	Line contactor (optional)	Line contactor (optional)
Q11 Type	F1 Type	Q21 Type	F1 Type	Q21 Type	Q21 Type
Type of coordination "1"	Type of coordination "1" TOC 1		Type of coordination "1" TOC 1		
3RW5513	3NA3820-6	3RT2025	3NA3820-6	3RT2027	3RT2025
3RW5514	3NA3820-6	3RT2026	3NA3820-6	3RT2027	3RT2026
3RW5515	3NA3822-6	3RT2027	3NA3822-6	3RT2036	3RT2027
3RW5516	3NA3824-6	3RT2035	3NA3824-6	3RT2037	3RT2035
3RW5517	3NA3824-6	3RT2035	3NA3824-6	3RT2038	3RT2035
3RW5524	3NA3824-6	3RT2036	3NA3824-6	3RT2046	3RT2036
3RW5525	3NA3830-6	3RT2037	3NA3830-6	3RT2047	3RT2037
3RW5526	3NA3132-6	3RT2038	3NA3132-6	3RT1055	3RT2038
3RW5527	3NA3136-6	3RT2046	3NA3136-6	3RT1056	3RT2046
3RW5534	3NA3244-6	3RT1054	3NA3244-6	3RT1064	3RT1054
3RW5535	3NA3244-6	3RT1055	3NA3244-6	3RT1065	3RT1055
3RW5536	3NA3365-6	3RT1056	3NA3365-6	3RT1066	3RT1056
3RW5543	2 x 3NA3354-6	3RT1064	2 x 3NA3354-6	3RT1075	3RT1064
3RW5544	2 x 3NA3354-6	3RT1065	2 x 3NA3354-6	3RT1076	3RT1065
3RW5545	2 x 3NA3365-6	3RT1075	2 x 3NA3365-6	3TF68	3RT1075
3RW5546	2 x 3NA3365-6	3RT1075	2 x 3NA3365-6	3TF69	3RT1075
3RW5547	2 x 3NA3365-6	3RT1076	2 x 3NA3365-6	3TF69	3RT1076
3RW5548	2 x 3NA3365-6	3TF68	2 x 3NA3365-6	--	3TF68

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**


Motor feeders according to IEC with 3NE1 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)
Q11	F'1	Q21
Type	Type	Type
Type of coordination "2"	Inline circuit	
3RW5513	3NE1815-0	3RT2025
3RW5514	3NE1802-0	3RT2026
3RW5515	3NE1817-0	3RT2027
3RW5516	3NE1818-0	3RT2035
3RW5517	3NE1820-0	3RT2035
3RW5524	3NE1021-2	3RT2036
3RW5525	3NE1022-0	3RT2037
3RW5526	3NE1224-0	3RT2038
3RW5527	3NE1224-0	3RT2046
3RW5534	3NE1225-0	3RT1054
3RW5535	3NE1227-0	3RT1055
3RW5536	3NE1230-0	3RT1056
3RW5543	3NE1230-2	3RT1064
3RW5544	3NE1331-0	3RT1065
3RW5545	3NE1334-2	3RT1075
3RW5546	3NE1334-2	3RT1075
3RW5547	3NE1436-2	3RT1076
3RW5548	3NE1437-2	3TF68

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

In inside-delta circuits, a gR class full-range fuse could not provide the semiconductor protection of the delta-connected soft starter with a short-circuit breaking capacity that is adequate for practical use. In this case, we recommend using aR class partial-range fuses for semiconductor protection for type of coordination "2" ([see page 7/47](#)).

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW**

Motor feeders according to IEC with 3NE8 / 3NE3 / 3NC3 fuses

aR class partial-range fuses for semiconductor protection

Type of coordination "2",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

Soft starters	Inline circuit			Inside-delta circuit			
	gG class fuse	aR class fuse	Line contactor (optional)	gG class fuse	aR class fuse	Line contactor (optional)	
	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V in the supply cable	for systems up to 480 V in the delta cable
Q11 Type	F1 Type	F3 Type	Q21 Type	F1 Type	F3 Type	Q21 Type	Q21 Type
Type of coordination "2"	T _{OC} 2						
3RW5513	3NA3820-6	3NE8017-1	3RT2025	3NA3820-6	3NE8017-1	3RT2027	3RT2025
3RW5514	3NA3820-6	3NE8020-1	3RT2026	3NA3820-6	3NE8020-1	3RT2027	3RT2026
3RW5515	3NA3822-6	3NE8021-1	3RT2027	3NA3822-6	3NE8021-1	3RT2036	3RT2027
3RW5516	3NA3824-6	3NE8022-1	3RT2035	3NA3824-6	3NE8022-1	3RT2037	3RT2035
3RW5517	3NA3824-6	3NE8024-1	3RT2035	3NA3824-6	3NE8024-1	3RT2038	3RT2035
3RW5524	3NA3824-6	3NE8024-1	3RT2036	3NA3824-6	3NE8024-1	3RT2046	3RT2036
3RW5525	3NA3830-6	3NE3227	3RT2037	3NA3830-6	3NE3227	3RT2047	3RT2037
3RW5526	3NA3132-6	3NE3227	3RT2038	3NA3132-6	3NE3227	3RT1055	3RT2038
3RW5527	3NA3136-6	3NE3227	3RT2046	3NA3136-6	3NE3227	3RT1056	3RT2046
3RW5534	3NA3244-6	3NE3231	3RT1054	3NA3244-6	3NE3231	3RT1064	3RT1054
3RW5535	3NA3244-6	3NE3233	3RT1055	3NA3244-6	3NE3233	3RT1065	3RT1055
3RW5536	3NA3365-6	3NE3334-0B	3RT1056	3NA3365-6	3NE3334-0B	3RT1066	3RT1056
3RW5543	2 x 3NA3354-6	3NE3333	3RT1064	2 x 3NA3354-6	3NE3333	3RT1075	3RT1064
3RW5544	2 x 3NA3354-6	3NE3335	3RT1065	2 x 3NA3354-6	3NE3335	3RT1076	3RT1065
3RW5545	2 x 3NA3365-6	--	3RT1075	2 x 3NA3365-6	--	3TF68	3RT1075
3RW5546	2 x 3NA3365-6	--	3RT1075	2 x 3NA3365-6	--	3TF69	3RT1075
3RW5547	2 x 3NA3365-6	3NE3340-8	3RT1076	2 x 3NA3365-6	3NE3340-8	3TF69	3RT1076
3RW5548	2 x 3NA3365-6	3NC3342-1U	3TF68	2 x 3NA3365-6	3NC3342-1U	--	3TF68

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3RV2/3VA motor starter protectors/circuit breakers can also be used, possibly with reduced short-circuit breaking capacity (see page 7/44). In these cases, optional line contactors can be dispensed with.

High Performance Soft Starters

3RW55 Failsafe soft starters > General data **NEW****Reversing operation with reversing contactors**Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

(For an example circuit, [see 3RW55 Equipment Manual, Appendix A.3](#))

Soft starters	Reversing contactor assembly for systems up to 480 V Q21 / Q22	For reversing contactor for systems up to 480 V Q21 / Q22
Type	Type	Type
3RW5513	3RA2325	3RT2025
3RW5514	3RA2326	3RT2026
3RW5515	3RA2327	3RT2027
3RW5516	3RA2335	3RT2035
3RW5517	3RA2335	3RT2035
3RW5524	3RA2336	3RT2036
3RW5525	3RA2337	3RT2037
3RW5526	3RA2338	3RT2038
3RW5527	3RA2346	3RT2046
3RW5534	--	3RT1054
3RW5535	--	3RT1055
3RW5536	--	3RT1056
3RW5543	--	3RT1064
3RW5544	--	3RT1065
3RW5545	--	3RT1075
3RW5546	--	3RT1075
3RW5547	--	3RT1076
3RW5548	--	3TF68

High Performance Soft Starters

3RW55 Failsafe soft starters > Inline circuit **IE3/IE4 ready** **NEW**

Selection and ordering data

For normal starting (CLASS 10E)




At 40 °C			SD ¹⁾			Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors		Rating [hp] for three-phase motors						
A	At 230 V	At 400 V	At 200/208 V	At 220/230 V	At 460/480 V	d			
	kW	kW	hp	hp	hp				
Operational voltage 200 ... 480 V									
13	3	5.5	3	3	7.5	5	3RW5513-□HF□4	1	1 unit
18	4	7.5	5	5	10	5	3RW5514-□HF□4	1	1 unit
25	5.5	11	5	7.5	15	5	3RW5515-□HF□4	1	1 unit
32	7.5	15	7.5	10	20	5	3RW5516-□HF□4	1	1 unit
38	11	18.5	10	10	25	5	3RW5517-□HF□4	1	1 unit
47	11	22	10	15	30	5	3RW5524-□HF□4	1	1 unit
63	18.5	30	20	20	40	5	3RW5525-□HF□4	1	1 unit
77	22	37	20	25	60	5	3RW5526-□HF□4	1	1 unit
93	22	45	30	30	60	5	3RW5527-□HF□4	1	1 unit

Type of electrical connection for the control circuit

Screw terminals
Spring-loaded terminals

Control supply voltage

24 V AC/DC
110 ... 250 V AC



¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V. Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.


At 40 °C			SD ¹⁾			Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors		Rating [hp] for three-phase motors						
A	At 230 V	At 400 V	At 200/208 V	At 220/230 V	At 460/480 V	d			
	kW	kW	hp	hp	hp				
Operational voltage 200 ... 480 V									
113	30	55	30	40	75	5	3RW5534-□HF□4	1	1 unit
143	37	75	40	50	100	5	3RW5535-□HF□4	1	1 unit
171	45	90	50	60	125	5	3RW5536-□HF□4	1	1 unit
210	55	110	60	75	150	5	3RW5543-□HF□4	1	1 unit
250	75	132	75	100	200	5	3RW5544-□HF□4	1	1 unit
315	90	160	100	125	250	5	3RW5545-□HF□4	1	1 unit
370	110	200	125	150	300	5	3RW5546-□HF□4	1	1 unit
470	132	250	150	150	350	5	3RW5547-□HF□4	1	1 unit
570	160	315	200	200	450	5	3RW5548-□HF□4	1	1 unit

Type of electrical connection for the control circuit

Spring-loaded terminals
Screw terminals

Control supply voltage

24 V AC/DC
110 ... 250 V AC



¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V. Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.

High Performance Soft Starters

3RW55 Failsafe soft starters > Inside-delta circuit **IE3/IE4 ready** **NEW**

Selection and ordering data

For normal starting (CLASS 10E)



At 40 °C for inside-delta circuit			Rating [hp] for three-phase motors			SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors		At 200/208 V	At 220/230 V	At 460/480 V	d				
	At 230 V	At 400 V								
A	kW	kW	hp	hp	hp					
Operational voltage 200 ... 480 V										
22.5	5.5	11	5	7.5	15	5	3RW5513-□HF□4		1	1 unit
31.5	7.5	15	7.5	10	20	5	3RW5514-□HF□4		1	1 unit
43.3	11	18.5	10	15	30	5	3RW5515-□HF□4		1	1 unit
55.4	15	22	15	20	40	5	3RW5516-□HF□4		1	1 unit
65.8	18.5	30	20	20	50	5	3RW5517-□HF□4		1	1 unit
81.4	22	45	25	30	60	5	3RW5524-□HF□4		1	1 unit
109	30	55	30	40	75	5	3RW5525-□HF□4		1	1 unit
133	37	75	40	50	100	5	3RW5526-□HF□4		1	1 unit
161	45	90	50	60	125	5	3RW5527-□HF□4		1	1 unit

Type of electrical connection for the control circuit

Screw terminals
Spring-loaded terminals


Control supply voltage

24 V AC/DC
110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



At 40 °C for inside-delta circuit			Rating [hp] for three-phase motors			SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors		At 200/208 V	At 220/230 V	At 460/480 V	d				
	At 230 V	At 400 V								
A	kW	kW	hp	hp	hp					
Operational voltage 200 ... 480 V										
196	55	110	60	75	150	5	3RW5534-□HF□4		1	1 unit
248	75	132	75	75	200	5	3RW5535-□HF□4		1	1 unit
296	90	160	100	100	200	5	3RW5536-□HF□4		1	1 unit
364	110	200	125	150	300	5	3RW5543-□HF□4		1	1 unit
433	132	250	150	150	350	5	3RW5544-□HF□4		1	1 unit
546	160	315	150	200	450	5	3RW5545-□HF□4		1	1 unit
641	200	355	200	250	500	5	3RW5546-□HF□4		1	1 unit
814	250	400	250	300	700	5	3RW5547-□HF□4		1	1 unit
987	315	560	350	400	850	5	3RW5548-□HF□4		1	1 unit

Type of electrical connection for the control circuit

Spring-loaded terminals
Screw terminals


Control supply voltage

24 V AC/DC
110 ... 250 V AC

¹⁾ 3RW55 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



High Performance Soft Starters

3RW55 Failsafe soft starters > Accessories





Selection and ordering data

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fan covers								
 3RW5983-0FC00	Fan cover	3RW551 (1x), 3RW552 (2x), 3RW553 (2x)	--	--	▶	3RW5983-0FC00	1	1 unit
		3RW554 (1x)	--	--	▶	3RW5984-0FC00	1	1 unit
Terminal covers								
 3RW5983-0TC20	Terminal cover	3RW552 (2x), 3RW553 (2x)	--	--	▶	3RW5983-0TC20	1	1 unit
		3RW554 (2x)	--	--	▶	3RW5984-0TC20	1	1 unit
 3RW5984-0TC20								
Enclosure components								
 3RW5950-0GL20	Hinged cover	3RW55	Without cutout	--	▶	3RW5950-0GL20	1	1 unit
Communication modules								
 3RW5980-0CS00	Communication module	3RW55	PROFINET High Feature with integral switch	--	▶	3RW5950-0CH00	1	1 unit
				PROFINET Standard	--	▶	3RW5980-0CS00	1
			PROFIBUS	--	▶	3RW5980-0CP00	1	1 unit
 3RW5980-0CE00			EtherNet/IP	--	▶	3RW5980-0CE00	1	1 unit
			Modbus RTU	--	▶	3RW5980-0CR00	1	1 unit
 3RW5980-0CR00			Modbus TCP	--	▶	3RW5980-0CT00	1	1 unit

7
SOFT STARTERS

High Performance Soft Starters

3RW55 Failsafe soft starters > Accessories

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
HMI modules								
	IP65 door mounting kit for HMI modules	3RW55	IP65	For HMI modules	▶	3RW5980-0HD00	1	1 unit
3RW5980-0HD00								
Connecting cables								
	HMI connection cable	3RW55	5 m, round	For door mounting	▶	3RW5980-0HC60	1	1 unit
			2.5 m, round		▶	3UF7933-0BA00-0	1	1 unit
			1.0 m, round		▶	3UF7937-0BA00-0	1	1 unit
			0.5 m, round		▶	3UF7932-0BA00-0	1	1 unit
3UF793.-0BA00-0								
Further accessories								
	Push-in lugs for wall mounting	--	Two lugs are required per device	For HMI modules and communication modules	2	3ZY1311-0AA00	1	10 units
3ZY1311-0AA00								
Blank labels								
	Unit labeling plates¹⁾	--	20 mm x 7 mm, titanium gray	For SIRIUS devices	20	3RT2900-1SB20	100	340 units
3RT2900-1SB20								

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

General Performance Soft Starters

3RW52 soft starters > General data

Overview

More information


Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW52
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=3rw52>

Industry Online Support (SIOS) topic page, see <https://support.industry.siemens.com/cs/ww/en/view/109747404>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>
 SIRIUS Soft Starter ES (TIA Portal), see page 7/7



SIRIUS 3RW52 General Performance soft starters are the ideal solution for standard applications. With ideal three-phase motor control, they cover the performance range from 10 to 600 HP @ 600V.

Optional HMI modules, plug-in communication modules (PROFINET, PROFIBUS, EtherNet/IP and Modbus) and either an analog output or thermistor motor protection ensure maximum flexibility. With their modern hybrid switching technology, the SIRIUS 3RW52 soft starters offer efficient switching for long-term, energy-saving use.

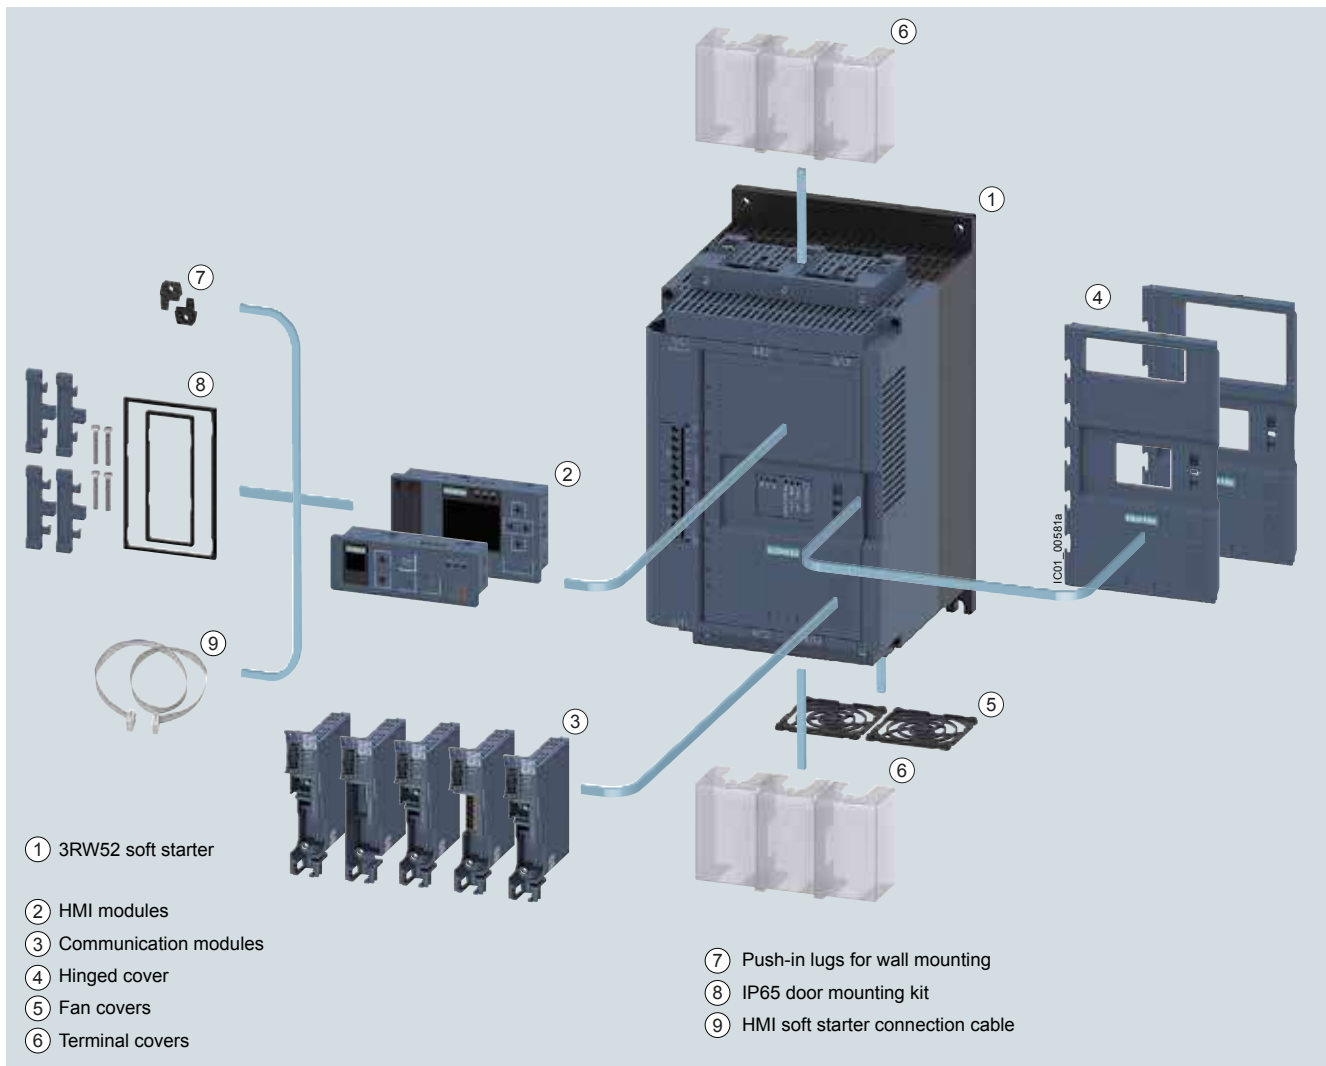

① 3RW52 soft starter

- ② HMI modules
- ③ Communication modules
- ④ Hinged cover
- ⑤ Fan covers
- ⑥ Terminal covers


- ⑦ Push-in lugs for wall mounting
- ⑧ IP65 door mounting kit
- ⑨ HMI soft starter connection cable

3RW52 General Performance soft starters with accessories (see page 7/69), for expansion with HMI module or communication module

General Performance Soft Starters

3RW52 soft starters > General data

Benefits

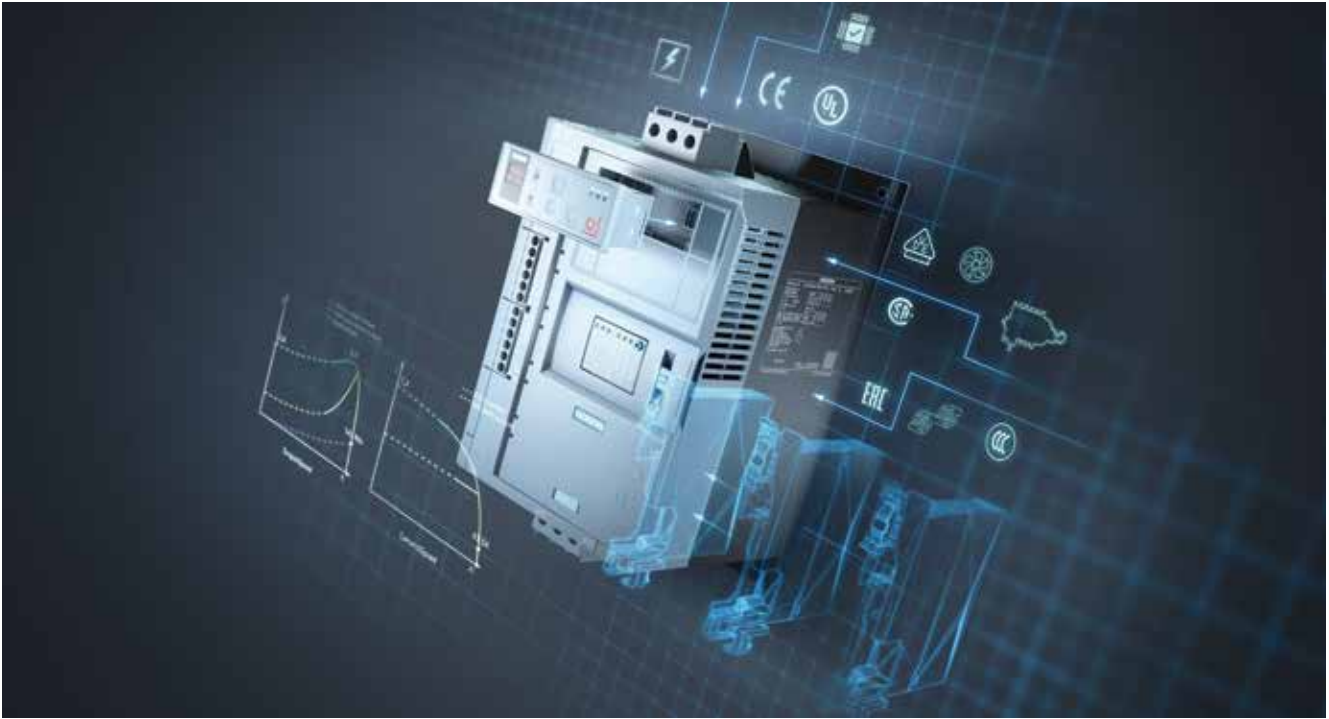

Product characteristics / function	Performance features / benefits
Hybrid switching devices and three-phase motor control	Minimum power loss and optimum/symmetrical motor control
TIA-Integration – communication modules and HMI modules optional	Efficient configuration and maximum flexibility in automation engineering
Soft Torque	Reduced mechanical loading and optimum pump stop
Parameterization using potentiometers	Simple and fast commissioning
Wide range for control supply and main voltage	Low variance, high system availability even with weak supply networks

General Performance Soft Starters


3RW52 soft starters > General data

Technical specifications

More information

Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/25100/td>
 Equipment Manual "SIRIUS 3RW52 Soft Starter", see <https://support.industry.siemens.com/cs/ww/en/view/109753751>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/25100/faq>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

Type	3RW5213 3RW5214 3RW5215	3RW5216 3RW5217	3RW5224 3RW5225	3RW5226 3RW5227 3RW5234 3RW5235 3RW5236	3RW5243 3RW5244 3RW5245 3RW5246 3RW5247 3RW5248
Installation/fixing/dimensions					
Width x height x depth		mm 170 × 275 × 152	185 × 306 × 203	210 × 393 × 203	
Type of mounting	Screw fixing				
Mounting position	For vertical mounting surface can be rotated +/- 10° and tilted forward or backward	For vertical mounting surface can be rotated +/- 90°, for vertical mounting surface can be tilted +/- 22.5° forward or backward	For vertical mounting surface can be rotated +/- 10° and tilted forward or backward	For vertical mounting surface can be rotated +/- 90°, for vertical mounting surface can be tilted +/- 22.5° forward or backward	
Distance to be maintained with side-by-side mounting					
• Above	mm	100			
• At the side	mm	5			
• Below	mm	75			
Maximum installation altitude above sea level¹⁾	m	5 000			
Degree of protection		IP20	IP00		
Ambient conditions					
Ambient temperature					
• During operation ²⁾	°C	-25 ... +60			
• During storage and transport	°C	-40 ... +80			
Environmental category according to IEC 60721					
• During operation		3K6 (no ice formation, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6			
• During storage		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not enter the devices), 1M4			
• During transport		2K2, 2C1, 2S1, 2M2 (max. height of fall 0.3 m)			

¹⁾ Derating from 1 000 m, see [characteristic curve on page 7/7](#).

²⁾ Note derating above 40 °C.

General Performance Soft Starters

3RW52 soft starters > General data

Type		3RW52...-C0.	3RW52...-C1.
Control circuit/control			
Control supply voltage			
• At AC/DC, rated value	V	24/24	--/--
• At AC	V	--	110 ... 250
• Relative negative tolerance/relative positive tolerance with AC	%	-20/20	-15/10
• Relative negative tolerance/relative positive tolerance with DC	%	-20/20	--/--
Frequency of the control supply voltage			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Type of overvoltage protection			
Varistors			
Type of short-circuit protection for control circuit¹⁾			
Fuse 4 A gG ($I_{CU} = 1$ kA), fuse 6 A quick-response ($I_{CU} = 1$ kA), MCB C1 ($I_{CU} = 600$ A), MCB C6 ($I_{CU} = 300$ A)			

¹⁾ Not included in scope of supply

Type		3RW52...-C.4	3RW52...-C.5
Power electronics			
Operational voltage, rated value			
• Relative negative tolerance/relative positive tolerance	V	200 ... 480	200 ... 600
	%	-15/10	
Operational voltage for inside-delta circuit, rated value			
• Relative negative tolerance/relative positive tolerance	V	200 ... 480	200 ... 600
	%	-15/10	
Operating frequency, rated value			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Minimum load [% of I_M]¹⁾			
	%	15	
Maximum cable length between soft starter and motor			
	m	800	

¹⁾ Relative to the smallest adjustable I_e .

General Performance Soft Starters

3RW52 soft starters > General data

Type		3RW5213	3RW5214	3RW5215	3RW5216	3RW5217
Rated operational current I_e	A	13	18	25	32	38
Power electronics						
Load rating with rated operational current I_e						
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	32/28.4/26	38/33.5/30.5
Permissible rated motor current and starts/h						
Normal starting (CLASS 10A)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	32/28.4/26	38/33.5/30.5
• 300% I_M						
- Start-up time 5 s	1/h	43	43	43	43	43
- Start-up time 10 s	1/h	18	18	18	18	18
• 350% I_M						
- Start-up time 5 s	1/h	28	28	28	28	28
- Start-up time 10 s	1/h	10	10	10	10	10
Normal starting (CLASS 10E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	32/28.4/26	38/33.5/30.5
• 300% I_M						
- Start-up time 20 s	1/h	21	21	21	21	21
- Start-up time 40 s	1/h	8	8	8	8	8
• 350% I_M						
- Start-up time 20 s	1/h	13	13	13	13	13
- Start-up time 40 s	1/h	4	4	4	4	4
Heavy starting (CLASS 20E)						
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	13/11.5/10.5	18/15.9/13.8	25/22.3/19.6	29.6/27.2/23.6	33.5/30.5/27.5
• 300% I_M						
- Start-up time 20 s	1/h	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4
• 350% I_M						
- Start-up time 20 s	1/h	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5
Adjustable rated motor current I_M						
• Minimum/maximum	A	5.5/13	7.5/18	11.5/25	14/32	15.5/38
• Minimum/maximum in inside-delta circuits	A	9.5/22.5	13/31.2	19.9/43.3	24.2/55.4	26.8/65.8

General Performance Soft Starters

3RW52 soft starters > General data

Type		3RW5224	3RW5225	3RW5226	3RW5227
Rated operational current I_e	A	47	63	77	93
Power electronics					
Load rating with rated operational current I_e					
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a					
		47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
Permissible rated motor current and starts/h					
Normal starting (CLASS 10A)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated					
	A	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M					
- Start-up time 5 s	1/h	43	43	43	43
- Start-up time 10 s	1/h	18	18	18	18
• 350% I_M					
- Start-up time 5 s	1/h	28	28	28	28
- Start-up time 10 s	1/h	10	10	10	10
Normal starting (CLASS 10E)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated					
	A	47/41.6/36.2	63/55.5/50.5	77/68/62	93/82.5/75.5
• 300% I_M					
- Start-up time 20 s	1/h	21	21	21	21
- Start-up time 40 s	1/h	8	8	8	8
• 350% I_M					
- Start-up time 20 s	1/h	13	13	13	13
- Start-up time 40 s	1/h	4	4	4	4
Heavy starting (CLASS 20E)					
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated					
	A	47/41.6/36.2	63/55.5/50.5	65/59/53	93/82.5/75.5
• 300% I_M					
- Start-up time 20 s	1/h	10	10	10	10
- Start-up time 40 s	1/h	4	3	4	4
• 350% I_M					
- Start-up time 20 s	1/h	7	4	7	7
- Start-up time 40 s	1/h	2	0	2.5	2.5
Adjustable rated motor current I_M					
• Minimum/maximum	A	20/47	25.5/63	32/77	40.5/93
• Minimum/maximum in inside-delta circuits	A	34.6/81.4	44.2/109	55.4/133	70.1/161

General Performance Soft Starters

3RW52 soft starters > General data

Type		3RW5234	3RW5235	3RW5236
Rated operational current I_e	A	113	143	171
Power electronics				
Load rating with rated operational current I_e				
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	113/101/89	143/128/118	171/153/141
Permissible rated motor current and starts/h				
Normal starting (CLASS 10A)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	143/128/118	171/153/141
• 300% I_M				
- Start-up time 5 s	1/h	43	43	43
- Start-up time 10 s	1/h	18	18	18
• 350% I_M				
- Start-up time 5 s	1/h	28	27	20
- Start-up time 10 s	1/h	10	8	4
Normal starting (CLASS 10E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	113/101/89	139/127/116	158/146/129
• 300% I_M				
- Start-up time 20 s	1/h	21	21	21
- Start-up time 40 s	1/h	8	8	8
• 350% I_M				
- Start-up time 20 s	1/h	13	12	12
- Start-up time 40 s	1/h	4	1	1
Heavy starting (CLASS 20E)				
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	109/97/85	113/103/93	129/117/105
• 300% I_M				
- Start-up time 20 s	1/h	10	10	10
- Start-up time 40 s	1/h	4	4	4
• 350% I_M				
- Start-up time 20 s	1/h	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5
Adjustable rated motor current I_M				
• Minimum/maximum	A	53/113	68/143	81/171
• Minimum/maximum in inside-delta circuits	A	91.8/196	118/248	140/296

General Performance Soft Starters

3RW52 soft starters > General data

Type		3RW5243	3RW5244	3RW5245	3RW5246	3RW5247	3RW5248
Rated operational current I_e	A	210	250	315	370	470	570
Power electronics							
Load rating with rated operational current I_e							
IEC + UL/CSA, individual mounting at 40/50/60 °C, A AC-53a		210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
Permissible rated motor current and starts/h							
Normal starting (CLASS 10A)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
• 300% I_M							
- Start-up time 5 s	1/h	43	43	43	43	30	20
- Start-up time 10 s	1/h	18	18	14	18	11	6
• 350% I_M							
- Start-up time 5 s	1/h	28	28	16	28	17	9
- Start-up time 10 s	1/h	5	10	4	10	5	1
Normal starting (CLASS 10E)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	197/184/170	250/220/200	279/255/231	370/328/300	398/362/326	460/416/372
• 300% I_M							
- Start-up time 20 s	1/h	21	21	21	21	21	18
- Start-up time 40 s	1/h	8	8	8	8	8	7
• 350% I_M							
- Start-up time 20 s	1/h	12	13	12	13	13	11
- Start-up time 40 s	1/h	1	4	3	4	4	2
Heavy starting (CLASS 20E)							
Rated motor current I_M , $T_U = 40/50/60$ °C ON period = 70%; motor protection activated	A	162/146/130	200/180/160	195/171/147	258/230/202	272/236/218	284/262/240
• 300% I_M							
- Start-up time 20 s	1/h	10	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4	4
• 350% I_M							
- Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5	2.5
Adjustable rated motor current I_M							
• Minimum/maximum	A	90/210	100/250	135/315	160/370	200/470	240/570
• Minimum/maximum in inside-delta circuits	A	156/364	173/433	234/546	277/641	346/814	416/987

General Performance Soft Starters


3RW52 soft starters > General data

Motor feeders according to IEC with 3RV2/3VA motor starter protectors/circuit breakers (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_{q1} in kA, see table

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.

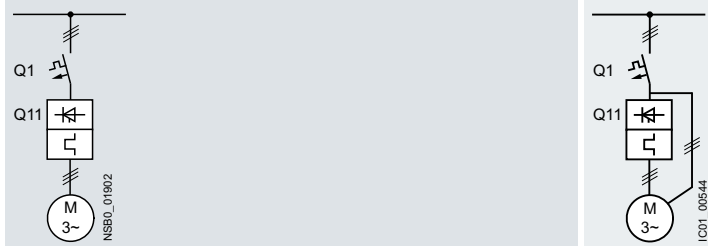

Soft starters	Motor starter protectors for 400 V systems				Motor starter protectors for 500 V systems			
	Q11 Type	I_{q1} kA	Q1 Type	I_{q1} kA	Q11 Type	I_{q1} kA	Q1 Type	I_{q1} kA
Type of coordination "1"	Inline circuit				Inside-delta circuit			
3RW5213	3RV2032-4TA10	65	3RV2032-4TA10	18	3RV2032-4DA10	65	3RV2032-4DA10	18
3RW5214	3RV2032-4DA10	65	3RV2032-4DA10	15	3RV2032-4EA10	65	3RV2032-4EA10	15
3RW5215	3RV2032-4EA10	65	3RV2032-4EA10	15	3RV2032-4VA10	65	3RV2032-4VA10	15
3RW5216	3RV2032-4VA10	65	3RV2032-4VA10	10	3RV2032-4JA10	65	3RV2032-4JA10	10
3RW5217	3RV2032-4WA10	65	3RV2032-4WA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5224	3RV2032-4JA10	65	3RV2032-4JA10	10	3RV2032-4RA10	65	3RV2032-4RA10	10
3RW5225	3VA2163-7MN32-0AA0	65	3VA2163-7MN32-0AA0	20	3VA2110-7MN32-0AA0	65	3VA2110-7MN32-0AA0	20
3RW5226	3VA2110-7MN32-0AA0	65	3VA2110-7MN32-0AA0	20	3VA2216-7MN32-0AA0	65	3VA2216-7MN32-0AA0	20
3RW5227	3VA2216-7MN32-0AA0	15	3VA2216-7MN32-0AA0	10	3VA2220-7MN32-0AA0	15	3VA2220-7MN32-0AA0	10
3RW5234	3VA2216-7MN32-0AA0	65	--	--	3VA2220-7MN32-0AA0	65	--	--
3RW5235	3VA2220-7MN32-0AA0	65	--	--	3VA2325-7MN32-0AA0	65	--	--
3RW5236	3VA2325-7MN32-0AA0	30	3VA2325-7MN32-0AA0	10	3VA2440-7MN32-0AA0	30	3VA2440-7MN32-0AA0	10
3RW5243	3VA2325-7MN32-0AA0	65	3VA2325-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5244	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65
3RW5245	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5246	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5247	3VA2450-7MN32-0AA0	65	3VA2450-7MN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65
3RW5248	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65	3VA2510-6HN32-0AA0	65

Note:

The service factor or measurement inaccuracies have been taken into account, for example, for the selection of the specified motor starter protectors/circuit breakers; the specified short-circuit breaking capacities I_{q1} in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

General Performance Soft Starters

3RW52 soft starters > General data

Motor feeders according to IEC with 3NA3 fuses

gG class full-range fuses for cable and line protection according to IEC 60269-2, without semiconductor protection

Type of coordination "1",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.

Soft starters	gG class fuse			Line contactor (optional)		gG class fuse			Line contactor (optional)	
	for systems up to 600 V	for systems up to 480 V	for systems up to 600 V	Type	Type	for systems up to 480 V in the supply cable	for systems up to 600 V in the supply cable	for systems up to 480 V in the delta	for systems up to 600 V in the delta	
Q11	F1	Q21	Q21	F1	Q21	Q21	Q21	Q21	Q21	
Type	Type	Type	Type	Type	Type	Type	Type	Type	Type	
Type of coordination "1"										
	Inline circuit				Inside-delta circuit					
3RW5213	3NA3820-6	3RT2025	3RT2025	3NA3820-6	3RT2027	3RT2035	3RT2025	3RT2025		
3RW5214	3NA3820-6	3RT2026	3RT2027	3NA3820-6	3RT2027	3RT2037	3RT2026	3RT2027		
3RW5215	3NA3822-6	3RT2027	3RT2037	3NA3822-6	3RT2036	3RT2037	3RT2027	3RT2037		
3RW5216	3NA3824-6	3RT2035	3RT2037	3NA3824-6	3RT2037	3RT2038	3RT2035	3RT2037		
3RW5217	3NA3824-6	3RT2035	3RT2037	3NA3824-6	3RT2038	3RT2046	3RT2035	3RT2037		
3RW5224	3NA3824-6	3RT2036	3RT2037	3NA3824-6	3RT2046	3RT2047	3RT2036	3RT2037		
3RW5225	3NA3830-6	3RT2037	3RT2046	3NA3830-6	3RT2047	3RT1054	3RT2037	3RT2046		
3RW5226	3NA3132-6	3RT2038	3RT2046	3NA3132-6	3RT1055	3RT1055	3RT2038	3RT2046		
3RW5227	3NA3136-6	3RT2046	3RT2047	3NA3136-6	3RT1056	3RT1056	3RT2046	3RT2047		
3RW5234	3NA3244-6	3RT1054	3RT1054	3NA3244-6	3RT1064	3RT1064	3RT1054	3RT1054		
3RW5235	3NA3244-6	3RT1055	3RT1055	3NA3244-6	3RT1065	3RT1065	3RT1055	3RT1055		
3RW5236	3NA3365-6	3RT1056	3RT1064	3NA3365-6	3RT1066	3RT1075	3RT1056	3RT1064		
3RW5243	2 x 3NA3354-6	3RT1064	3RT1064	2 x 3NA3354-6	3RT1075	3RT1075	3RT1064	3RT1064		
3RW5244	2 x 3NA3354-6	3RT1065	3RT1065	2 x 3NA3354-6	3RT1076	3RT1076	3RT1065	3RT1065		
3RW5245	2 x 3NA3365-6	3RT1075	3RT1075	2 x 3NA3365-6	3TF68	3TF68	3RT1075	3RT1075		
3RW5246	2 x 3NA3365-6	3RT1075	3RT1075	2 x 3NA3365-6	3TF69	3TF69	3RT1075	3RT1075		
3RW5247	2 x 3NA3365-6	3RT1076	3RT1276	2 x 3NA3365-6	3TF69	3TF69	3RT1076	3RT1276		
3RW5248	2 x 3NA3365-6	3TF68	3TF68	2 x 3NA3365-6	--	--	3TF68	3TF68		

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

General Performance Soft Starters

3RW52 soft starters > General data


Motor feeders according to IEC with 3NE1 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters	gG class fuse	Line contactor (optional)	
Q11	for systems up to 600 V	for systems up to 480 V	for systems up to 600 V
Type	F'1	Q21	Q21
Type of coordination "2"	Type	Type	Type
Inline circuit			
3RW5213	3NE1815-0	3RT2025	3RT2025
3RW5214	3NE1802-0	3RT2026	3RT2027
3RW5215	3NE1817-0	3RT2027	3RT2037
3RW5216	3NE1818-0	3RT2035	3RT2037
3RW5217	3NE1820-0	3RT2035	3RT2037
3RW5224	3NE1021-2	3RT2036	3RT2037
3RW5225	3NE1022-0	3RT2037	3RT2046
3RW5226	3NE1224-0	3RT2038	3RT2046
3RW5227	3NE1224-0	3RT2046	3RT2047
3RW5234	3NE1225-0	3RT1054	3RT1054
3RW5235	3NE1227-0	3RT1055	3RT1055
3RW5236	3NE1230-0	3RT1056	3RT1064
3RW5243	3NE1230-2 ¹⁾	3RT1064	3RT1064
3RW5244	3NE1331-0	3RT1065	3RT1065
3RW5245	3NE1334-2	3RT1075	3RT1075
3RW5246	3NE1334-2	3RT1075	3RT1075
3RW5247	3NE1436-2	3RT1076	3RT1276
3RW5248	3NE1437-2	3TF68	3TF68

¹⁾ For systems up to 500 V.

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

In inside-delta circuits, a gR class full-range fuse could not provide the semiconductor protection of the delta-connected soft starter with a short-circuit breaking capacity that is adequate for practical use. In this case, we recommend using aR class partial-range fuses for semiconductor protection for type of coordination "2" (see page 7/64).

General Performance Soft Starters

3RW52 soft starters > General data




Motor feeders according to IEC with fuses 3NE8 / 3NE4 / 3NE3

aR class partial-range fuses for semiconductor protection

Type of coordination "2",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).

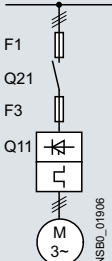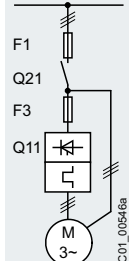Soft starters										
	gG class fuse	aR class fuse	Line contactor (optional)		gG class fuse	aR class fuse	Line contactor (optional)			
	for systems up to 600 V	for systems up to 500 V	for systems up to 480 V	for systems up to 600 V	for systems up to 600 V	for systems up to 600 V	for systems up to 480 V in the supply cable	for systems up to 600 V in the supply cable	for systems up to 480 V in the delta	for systems up to 600 V in the delta
Q11 Type	F1 Type	F3 Type	Q21 Type	Q21 Type	F1 Type	F3 Type	Q21 Type	Q21 Type	Q21 Type	Q21 Type
Type of coordination "2"	 Inline circuit				Inside-delta circuit					
3RW5213	3NA3820-6	3NE8017-1	3RT2025	3RT2025	3NA3820-6	3NE8017-1	3RT2027	3RT2035	3RT2025	3RT2025
3RW5214	3NA3820-6	3NE8020-1	3RT2026	3RT2027	3NA3820-6	3NE8020-1	3RT2027	3RT2037	3RT2026	3RT2027
3RW5215	3NA3822-6	3NE8021-1	3RT2027	3RT2037	3NA3822-6	3NE8021-1	3RT2036	3RT2037	3RT2027	3RT2037
3RW5216	3NA3824-6	3NE8022-1	3RT2035	3RT2037	3NA3824-6	3NE8022-1	3RT2037	3RT2038	3RT2035	3RT2037
3RW5217	3NA3824-6	3NE8024-1	3RT2035	3RT2037	3NA3824-6	3NE8024-1	3RT2038	3RT2046	3RT2035	3RT2037
3RW5224	3NA3824-6	3NE8024-1	3RT2036	3RT2037	3NA3824-6	3NE8024-1	3RT2046	3RT2047	3RT2036	3RT2037
3RW5225	3NA3830-6	3NE8024-1	3RT2037	3RT2046	3NA3830-6	3NE8024-1	3RT2047	3RT1054	3RT2037	3RT2046
3RW5226	3NA3132-6	3NE8024-1	3RT2038	3RT2046	3NA3132-6	3NE8024-1	3RT1055	3RT1055	3RT2038	3RT2046
3RW5227	3NA3136-6	3NE4124	3RT2046	3RT2047	3NA3136-6	3NE4124	3RT1056	3RT1056	3RT2046	3RT2047
3RW5234	3NA3244-6	3NE3332-0B	3RT1054	3RT1054	3NA3244-6	3NE3332-0B	3RT1064	3RT1064	3RT1054	3RT1054
3RW5235	3NA3244-6	3NE3334-0B	3RT1055	3RT1055	3NA3244-6	3NE3334-0B	3RT1065	3RT1065	3RT1055	3RT1055
3RW5236	3NA3365-6	3NE3335	3RT1056	3RT1064	3NA3365-6	3NE3335	3RT1066	3RT1075	3RT1056	3RT1064
3RW5243	2 x 3NA3354-6	3NE3333	3RT1064	3RT1064	2 x 3NA3354-6	3NE3333	3RT1075	3RT1075	3RT1064	3RT1064
3RW5244	2 x 3NA3354-6	3NE3336	3RT1065	3RT1065	2 x 3NA3354-6	3NE3336	3RT1076	3RT1076	3RT1065	3RT1065
3RW5245	2 x 3NA3365-6	3NE3336	3RT1075	3RT1075	2 x 3NA3365-6	3NE3336	3TF68	3TF68	3RT1075	3RT1075
3RW5246	2 x 3NA3365-6	3NE3336	3RT1075	3RT1075	2 x 3NA3365-6	3NE3336	3TF69	3TF69	3RT1075	3RT1075
3RW5247	2 x 3NA3365-6	3NE3340-8	3RT1076	3RT1276	2 x 3NA3365-6	3NE3340-8	3TF69	3TF69	3RT1076	3RT1276
3RW5248	2 x 3NA3365-6	3NE3340-8	3TF68	3TF68	2 x 3NA3365-6	3NE3340-8	--	--	3TF68	3TF68

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.


For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3RV2/3VA motor starter protectors/circuit breakers can also be used, possibly with reduced short-circuit breaking capacity ([see page 7/61](#)). In these cases, optional line contactors can be dispensed with.

General Performance Soft Starters

3RW52 soft starters > Inline circuit **IE3/IE4 ready**

Selection and ordering data

For normal starting (CLASS 10A)

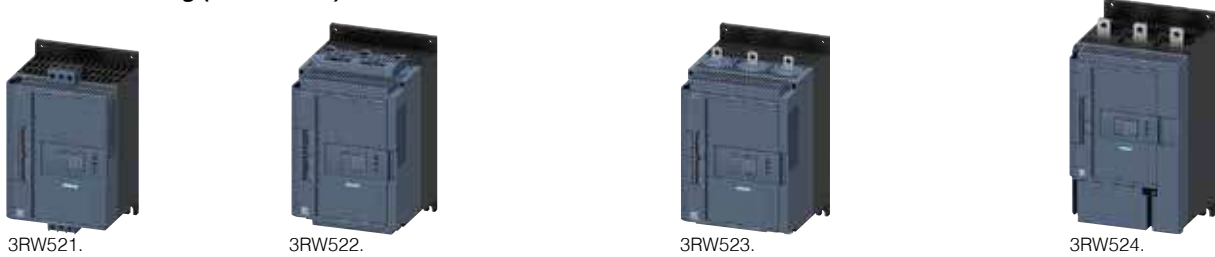

At 40 °C				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			Rating [hp] for three-phase motors				d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
13	3	5.5	--	3	3	7.5	--	5	3RW5213-□□C□4		1	1 unit
18	4	7.5	--	5	5	10	--	5	3RW5214-□□C□4		1	1 unit
25	5.5	11	--	5	7.5	15	--	5	3RW5215-□□C□4		1	1 unit
32	7.5	15	--	7.5	10	20	--	5	3RW5216-□□C□4		1	1 unit
38	11	18.5	--	10	10	25	--	5	3RW5217-□□C□4		1	1 unit
47	11	22	--	10	15	30	--	5	3RW5224-□□C□4		1	1 unit
63	18.5	30	--	20	20	40	--	5	3RW5225-□□C□4		1	1 unit
77	22	37	--	20	25	60	--	5	3RW5226-□□C□4		1	1 unit
93	22	45	--	30	30	60	--	5	3RW5227-□□C□4		1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 480 V. Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



At 40 °C				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			Rating [hp] for three-phase motors				d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
113	30	55	--	30	40	75	--	5	3RW5234-□□C□4		1	1 unit
143	37	75	--	40	50	100	--	5	3RW5235-□□C□4		1	1 unit
171	45	90	--	50	60	125	--	5	3RW5236-□□C□4		1	1 unit
210	55	110	--	60	75	150	--	5	3RW5243-□□C□4		1	1 unit
250	75	132	--	75	100	200	--	5	3RW5244-□□C□4		1	1 unit
315	90	160	--	100	125	250	--	5	3RW5245-□□C□4		1	1 unit
370	110	200	--	125	150	300	--	5	3RW5246-□□C□4		1	1 unit
470	132	250	--	150	150	350	--	5	3RW5247-□□C□4		1	1 unit
570	160	315	--	200	200	450	--	5	3RW5248-□□C□4		1	1 unit

Type of electrical connection for the control circuit

- Spring-loaded terminals
- Screw terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 480 V. Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



General Performance Soft Starters

3RW52 soft starters > Inline circuit **IE3/IE4 ready**

For normal starting (CLASS 10A)



At 40 °C				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d				
	At 230 V	At 400 V	At 500 V									
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
13	3	5.5	7.5	3	3	7.5	10	5	3RW5213-□□C□5		1	1 unit
18	4	7.5	11	5	5	10	15	5	3RW5214-□□C□5		1	1 unit
25	5.5	11	15	5	7.5	15	20	5	3RW5215-□□C□5		1	1 unit
32	7.5	15	18.5	7.5	10	20	30	5	3RW5216-□□C□5		1	1 unit
38	11	18.5	22	10	10	25	30	5	3RW5217-□□C□5		1	1 unit
47	11	22	30	10	15	30	40	5	3RW5224-□□C□5		1	1 unit
63	18.5	30	37	20	20	40	60	5	3RW5225-□□C□5		1	1 unit
77	22	37	45	20	25	60	75	5	3RW5226-□□C□5		1	1 unit
93	22	45	55	30	30	60	75	5	3RW5227-□□C□5		1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC



Note:

For the constraints for the motor outputs specified here, see page 7/7.

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 600 V: Standard delivery time SD = 2 days (d).

SOFT STARTERS 7

At 40 °C				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d				
	At 230 V	At 400 V	At 500 V									
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
113	30	55	75	30	40	75	100	5	3RW5234-□□C□5		1	1 unit
143	37	75	90	40	50	100	125	5	3RW5235-□□C□5		1	1 unit
171	45	90	110	50	60	125	150	5	3RW5236-□□C□5		1	1 unit
210	55	110	132	60	75	150	200	5	3RW5243-□□C□5		1	1 unit
250	75	132	160	75	100	200	250	5	3RW5244-□□C□5		1	1 unit
315	90	160	200	100	125	250	300	5	3RW5245-□□C□5		1	1 unit
370	110	200	250	125	150	300	350	5	3RW5246-□□C□5		1	1 unit
470	132	250	315	150	150	350	450	5	3RW5247-□□C□5		1	1 unit
570	160	315	355	200	200	450	600	5	3RW5248-□□C□5		1	1 unit

Type of electrical connection for the control circuit


- Spring-loaded terminals
- Screw terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC



Note:

For the constraints for the motor outputs specified here, see page 7/7.

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 600 V: Standard delivery time SD = 2 days (d).

General Performance Soft Starters

3RW52 soft starters > Inside-delta circuit **IE3/IE4 ready**

Selection and ordering data

For normal starting (CLASS 10A)



3RW521.



3RW522.



3RW523.



3RW524.

At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d				
	At 230 V	At 400 V	At 500 V									
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
22.5	5.5	11	--	5	7.5	15	--	5	3RW5213-□□C□4		1	1 unit
31.5	7.5	15	--	7.5	10	20	--	5	3RW5214-□□C□4		1	1 unit
43.3	11	18.5	--	10	15	30	--	5	3RW5215-□□C□4		1	1 unit
55.4	15	22	--	15	20	40	--	5	3RW5216-□□C□4		1	1 unit
65.8	18.5	30	--	20	20	50	--	5	3RW5217-□□C□4		1	1 unit
81.4	22	45	--	25	30	60	--	5	3RW5224-□□C□4		1	1 unit
109	30	55	--	30	40	75	--	5	3RW5225-□□C□4		1	1 unit
133	37	75	--	40	50	100	--	5	3RW5226-□□C□4		1	1 unit
161	45	90	--	50	60	125	--	5	3RW5227-□□C□4		1	1 unit

Type of electrical connection for the control circuit

- Screw terminals
- Spring-loaded terminals

Product function

- Analog output
- Thermistor motor protection


Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors			At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V	d				
	At 230 V	At 400 V	At 500 V									
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
196	55	110	--	60	60	150	--	5	3RW5234-□□C□4		1	1 unit
248	75	132	--	75	75	200	--	5	3RW5235-□□C□4		1	1 unit
296	90	160	--	100	100	200	--	5	3RW5236-□□C□4		1	1 unit
364	110	200	--	125	125	300	--	5	3RW5243-□□C□4		1	1 unit
433	132	250	--	150	150	350	--	5	3RW5244-□□C□4		1	1 unit
546	160	315	--	150	150	450	--	5	3RW5245-□□C□4		1	1 unit
641	200	355	--	200	200	500	--	5	3RW5246-□□C□4		1	1 unit
814	250	400	--	250	250	700	--	5	3RW5247-□□C□4		1	1 unit
987	315	560	--	350	350	850	--	5	3RW5248-□□C□4		1	1 unit

Type of electrical connection for the control circuit

- Spring-loaded terminals
- Screw terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 480 V: Standard delivery time SD = 1 day (d).

Note:

For the constraints for the motor outputs specified here, see page 7/7.



SOFT STARTERS

General Performance Soft Starters

3RW52 soft starters > Inside-delta circuit **IE3/IE4 ready**

For normal starting (CLASS 10A)



At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors							d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
22.5	5.5	11	15	5	7.5	15	20	5	3RW5213-□□C□5		1	1 unit
31.5	7.5	15	18.5	7.5	10	20	25	5	3RW5214-□□C□5		1	1 unit
43.3	11	18.5	22	10	15	30	40	5	3RW5215-□□C□5		1	1 unit
55.4	15	22	30	15	20	40	50	5	3RW5216-□□C□5		1	1 unit
65.8	18.5	30	37	20	20	50	60	5	3RW5217-□□C□5		1	1 unit
81.4	22	45	45	25	30	60	75	5	3RW5224-□□C□5		1	1 unit
109	30	55	55	30	40	75	100	5	3RW5225-□□C□5		1	1 unit
133	37	75	90	40	50	100	125	5	3RW5226-□□C□5		1	1 unit
161	45	90	110	50	60	125	150	5	3RW5227-□□C□5		1	1 unit

Type of electrical connection for the control circuit
 Screw terminals
 Spring-loaded terminals

Product function
 Analog output
 Thermistor motor protection

Control supply voltage
 24 V AC/DC
 110 ... 250 V AC



Note:
 For the constraints for the motor outputs specified here, see page 7/7.

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 600 V: Standard delivery time SD = 2 days (d).


SOFT STARTERS 7

At 40 °C for inside-delta circuit				Rating [hp] for three-phase motors				SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Operational current	Operating power for three-phase motors							d				
	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
A	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
196	55	110	132	60	75	150	200	5	3RW5234-□□C□5		1	1 unit
248	75	132	160	75	75	200	250	5	3RW5235-□□C□5		1	1 unit
296	90	160	200	100	100	200	300	5	3RW5236-□□C□5		1	1 unit
364	110	200	250	125	150	300	350	5	3RW5243-□□C□5		1	1 unit
433	132	250	315	150	150	350	450	5	3RW5244-□□C□5		1	1 unit
546	160	315	355	150	200	450	550	5	3RW5245-□□C□5		1	1 unit
641	200	355	450	200	250	500	700	5	3RW5246-□□C□5		1	1 unit
814	250	400	500	250	300	700	900	5	3RW5247-□□C□5		1	1 unit
987	315	560	630	350	400	850	1 100	5	3RW5248-□□C□5		1	1 unit

Type of electrical connection for the control circuit
 Spring-loaded terminals
 Screw terminals

Product function
 Analog output
 Thermistor motor protection

Control supply voltage
 24 V AC/DC
 110 ... 250 V AC



Note:
 For the constraints for the motor outputs specified here, see page 7/7.

¹⁾ 3RW52 soft starter with screw terminals for operational voltage up to 600 V: Standard delivery time SD = 2 days (d).

General Performance Soft Starters








3RW52 soft starters > Accessories

Selection and ordering data

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fan covers								
 3RW5983-0FC00	Fan cover	3RW5216/17 (1x), 3RW5226/27 (2x), 3RW523 (2x)	--	--	▶	3RW5983-0FC00	1	1 unit
		3RW524 (1x)	--	--	▶	3RW5984-0FC00	1	1 unit
Terminal covers								
 3RW5983-0TC20	Terminal cover	3RW522 (2x), 3RW523 (2x)	--	--	▶	3RW5983-0TC20	1	1 unit
		3RW524 (2x)	--	--	▶	3RW5984-0TC20	1	1 unit
 3RW5984-0TC20								
Enclosure components								
 3RW5950-0GL30	Hinged cover	3RW52	With cutout for High Feature HMI module	--	▶	3RW5950-0GL30	1	1 unit
 3RW5950-0GL40			With cutout for Standard HMI module	--	▶	3RW5950-0GL40	1	1 unit
Communication modules								
 3RW5980-0CS00	Communication module	3RW52	PROFINET Standard	--	▶	3RW5980-0CS00	1	1 unit
			PROFIBUS	--	▶	3RW5980-0CP00	1	1 unit
			EtherNet/IP	--	▶	3RW5980-0CE00	1	1 unit
 3RW5980-0CR00			Modbus RTU	--	▶	3RW5980-0CR00	1	1 unit
			Modbus TCP	--	▶	3RW5980-0CT00	1	1 unit

General Performance Soft Starters

3RW52 soft starters > Accessories

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
HMI modules								
	HMI module	3RW52	High Feature	--	▶	3RW5980-0HF00	1	1 unit
3RW5980-0HF00			Standard	--	▶	3RW5980-0HS00	1	1 unit
								
3RW5980-0HS00								
	IP65 door mounting kit for HMI modules	3RW52	IP65	For HMI modules	▶	3RW5980-0HD00	1	1 unit
3RW5980-0HD00								
Connecting cables								
	HMI connection cable	3RW52	5 m, round	For door mounting	▶	3RW5980-0HC60	1	1 unit
			2.5 m, round		▶	3UF7933-0BA00-0	1	1 unit
			1.0 m, round		▶	3UF7937-0BA00-0	1	1 unit
			0.5 m, round		▶	3UF7932-0BA00-0	1	1 unit
3UF793-0BA00-0								
			0.1 m, flat	for mounting in the device	▶	3UF7931-0AA00-0	1	1 unit
3UF7931-0AA00-0								
Further accessories								
	Push-in lugs for wall mounting	--	Two lugs are required per device	For HMI modules and communication modules	2	3ZY1311-0AA00	1	10 units
3ZY1311-0AA00								
Blank labels								
	Unit labeling plates¹⁾	--	20 mm x 7 mm, titanium gray	For SIRIUS devices	20	3RT2900-1SB20	100	340 units
3RT2900-1SB20								

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Overview

More information


Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW50
 TIA Selection Tool Cloud (TST Cloud), see <https://support.industry.siemens.com/cs/ww/en/view/109747404>

Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>
 SIRIUS Soft Starter ES (TIA Portal), see page 7/7



SIRIUS 3RW50 Basic Performance soft starters are the compact solution for standard applications. With two-phase motor control, they cover the performance range from 125 to 600 HP @ 600V.

Optional HMI modules for installation in the control cabinet door, laterally mountable communication modules (PROFINET, PROFIBUS, EtherNet/IP and Modbus) and either an analog output or thermistor motor protection ensure maximum flexibility. With their modern hybrid switching technology, the SIRIUS 3RW50 soft starters offer efficient switching for long-term, energy-saving use.

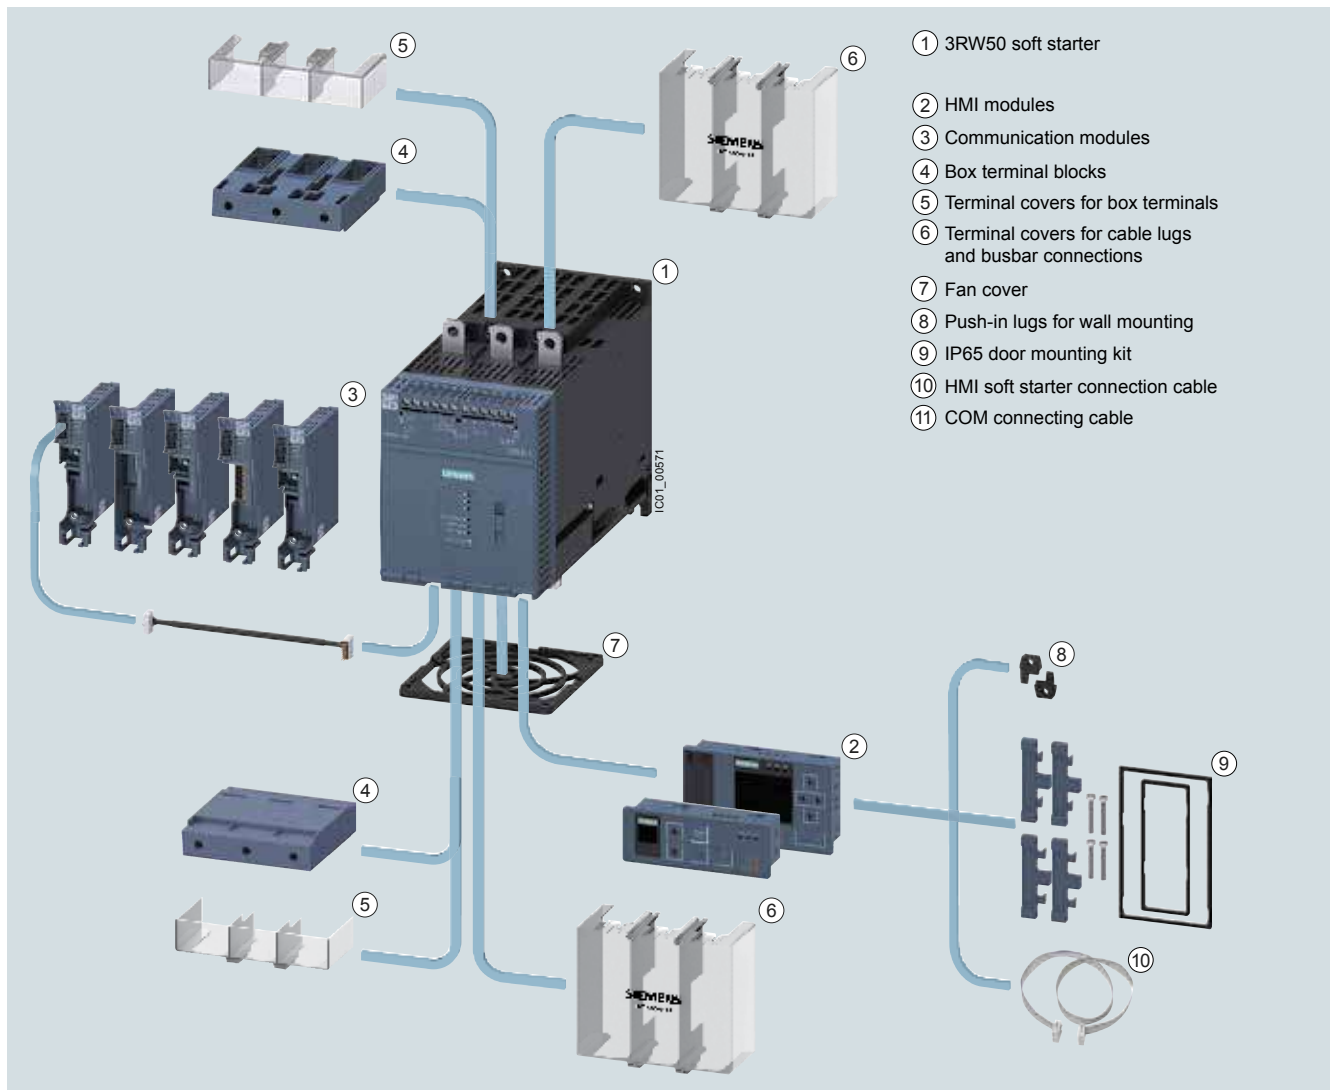


3RW50 Basic Performance soft starters with accessories (see page 7/81), for expansion with HMI module or communication module

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Benefits

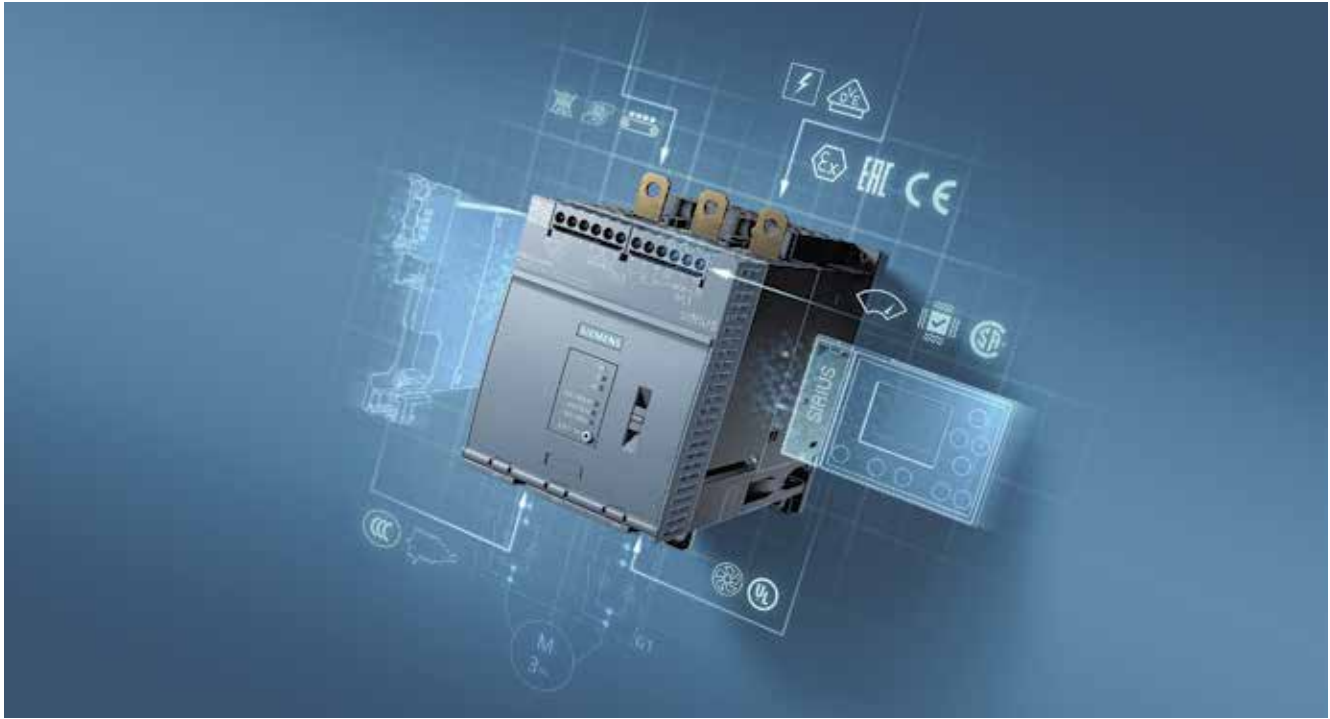

Product characteristics / function	Performance features / benefits
Hybrid switching devices and two-phase motor control	Minimum power loss and optimized motor control by avoiding DC components
Small and compact design	Space-saving, clearly arranged control panel layout
TIA-Integration – communication modules and HMI modules optional	Efficient configuration and maximum flexibility in automation engineering
Motor overload and intrinsic device protection without additional wiring	Adjustable trip classes, integrated diagnostics functions
Soft Torque	Reduced mechanical loading and optimum pump stop
Parameterization using potentiometers	Simple and fast commissioning
Wide range for control supply and main voltage	Low variance, high system availability even with weak supply networks
Certified according to ATEX/IECEX directive	Suitable for the starting of explosion-proof motors with "increased safety" type of protection

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Technical specifications

More information


Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/25252/td>
 Equipment Manual "SIRIUS 3RW50 Soft Starter", see <https://support.industry.siemens.com/cs/ww/en/view/109753750>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/25252/faq>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

Type	3RW5055 3RW5056	3RW5072 3RW5073 3RW5074 3RW5075 3RW5076 3RW5077
-------------	----------------------------------	--

Installation/fixing/dimensions

Width x height x depth	mm	120 × 198 × 249	160 × 230 × 282
-------------------------------	----	-----------------	-----------------



Type of mounting	Screw fixing
-------------------------	--------------

Mounting position	For vertical mounting surface can be rotated +/- 90°, for vertical mounting surface can be tilted +/- 22.5° forward or backward
--------------------------	---

Distance to be maintained with side-by-side mounting		
• Above	mm	100
• At the side	mm	5
• Below	mm	75

Maximum installation altitude above sea level¹⁾	m	5 000
---	---	-------

Degree of protection	IP00
-----------------------------	------

Ambient conditions

Ambient temperature		
• During operation ²⁾	°C	-25 ... +60
• During storage and transport	°C	-40 ... +80

Environmental category according to IEC 60721		
• During operation		3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• During storage		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not enter the devices), 1M4
• During transport		2K2, 2C1, 2S1, 2M2 (max. height of fall 0,3 m)

¹⁾ Derating from 1 000 m, see characteristic curve on page 7/7.

²⁾ Note derating above 40 °C.

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Type		3RW50...-B0.	3RW50...-B1.
Control circuit/control			
Control supply voltage			
• At AC/DC, rated value	V	24/24	--/--
• At AC	V	--	110 ... 250
• Relative negative tolerance/relative positive tolerance with AC	%	-20/20	-15/10
• Relative negative tolerance/relative positive tolerance with DC	%	-20/20	--/--
Frequency of the control supply voltage			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Type of overvoltage protection			
Varistors			
Type of short-circuit protection for control circuit¹⁾			
Fuse 4 A gG ($I_{cu} = 1$ kA), fuse 6 A quick-response ($I_{cu} = 1$ kA), MCB C1 ($I_{cu} = 600$ A), MCB C6 ($I_{cu} = 300$ A)			

¹⁾ Not included in scope of supply

Type		3RW50...-B.4	3RW50...-B.5
Power electronics			
Operational voltage, rated value			
• Relative negative tolerance/relative positive tolerance	V	200 ... 480	200 ... 600
	%	-15/10	
Operating frequency, rated value			
• Relative negative tolerance/relative positive tolerance	Hz	50 ... 60	
	%	-10/10	
Minimum load [% of I_M]¹⁾			
	%	15	
Maximum cable length between soft starter and motor			
	m	800	

¹⁾ Relative to the smallest adjustable I_G .

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Type		3RW5055	3RW5056
Rated operational current I_e	A	143	171
Power electronics			
Load rating with rated operational current I_e			
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	143/128/118	171/153/141
Permissible rated motor current and starts/h			
Normal starting (CLASS 10A)			
Rated motor current I_M , $T_U = 40/50/60$ °C	A	143/128/118	171/153/141
ON period = 70%; motor protection activated			
• 300% I_M - Start-up time 5 s	1/h	43	43
- Start-up time 10 s	1/h	18	18
• 350% I_M - Start-up time 5 s	1/h	28	28
- Start-up time 10 s	1/h	10	9
Normal starting (CLASS 10E)			
Rated motor current I_M , $T_U = 40/50/60$ °C	A	143/128/118	171/153/141
ON period = 70%; motor protection activated			
• 300% I_M - Start-up time 20 s	1/h	21	21
- Start-up time 40 s	1/h	8	8
• 350% I_M - Start-up time 20 s	1/h	12	9
- Start-up time 40 s	1/h	4	--
Heavy starting (CLASS 20E)			
Rated motor current I_M , $T_U = 40/50/60$ °C	A	108/98/88	135/123/111
ON period = 70%; motor protection activated			
• 300% I_M - Start-up time 20 s	1/h	10	10
- Start-up time 40 s	1/h	4	4
• 350% I_M - Start-up time 20 s	1/h	7	7
- Start-up time 40 s	1/h	2.5	2.5
Adjustable rated motor current I_M			
• Minimum/maximum	A	68/143	81/117

Type		3RW5072	3RW5073	3RW5074	3RW5075	3RW5076	3RW5077
Rated operational current I_e	A	210	250	315	370	470	570
Power electronics							
Load rating with rated operational current I_e							
IEC + UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
Permissible rated motor current and starts/h							
Normal starting (CLASS 10A)							
Rated motor current I_M , $T_U = 40/50/60$ °C	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
ON period = 70%; motor protection activated							
• 300% I_M - Start-up time 5 s	1/h	43	43	43	43	43	28
- Start-up time 10 s	1/h	18	18	18	18	18	11
• 350% I_M - Start-up time 5 s	1/h	28	28	28	28	28	16
- Start-up time 10 s	1/h	8	10	10	10	10	4
Normal starting (CLASS 10E)							
Rated motor current I_M , $T_U = 40/50/60$ °C	A	210/186/170	250/220/200	315/279/255	370/328/300	470/416/380	570/504/460
ON period = 70%; motor protection activated							
• 300% I_M - Start-up time 20 s	1/h	21	21	21	21	20	21
- Start-up time 40 s	1/h	8	8	8	8	7	8
• 350% I_M - Start-up time 20 s	1/h	8	13	12	13	12	13
- Start-up time 40 s	1/h	--	4	4	4	2	4
Heavy starting (CLASS 20E)							
Rated motor current I_M , $T_U = 40/50/60$ °C	A	162/146/130	200/180/160	219/195/171	258/230/202	272/254/218	284/262/240
ON period = 70%; motor protection activated							
• 300% I_M - Start-up time 20 s	1/h	10	10	10	10	10	10
- Start-up time 40 s	1/h	4	4	4	4	4	4
• 350% I_M - Start-up time 20 s	1/h	7	7	7	7	7	7
- Start-up time 40 s	1/h	2.5	2.5	2.5	2.5	2.5	2.5
Adjustable rated motor current I_M							
• Minimum/maximum	A	90/210	100/250	135/315	160/370	200/470	240/570

7
SOFT STARTERS

Basic Performance Soft Starters


3RW50 soft starters > General data **NEW**

Motor feeders according to IEC with 3VA motor starter protectors/circuit breakers (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_q in kA, see table

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters	Motor starter protectors		for 500 V systems	
Q11	Q1	I_q	Q1	I_q
Type	Type	kA	Type	kA
Type of coordination "1"	Inline circuit			
	<small>ToC 1</small>			
3RW5055	3VA2220-7MN32-0AA0	20	3VA2220-7MN32-0AA0	20
3RW5056	3VA2220-7MN32-0AA0	20	3VA2220-7MN32-0AA0	20
3RW5072	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5073	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5074	3VA2440-7MN32-0AA0	65	3VA2440-7MN32-0AA0	65
3RW5075	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5076	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65
3RW5077	3VA2580-6HN32-0AA0	65	3VA2580-6HN32-0AA0	65

Note:

The service factor or measurement inaccuracies have been taken into account, for example, for the selection of the specified motor starter protectors/circuit breakers; the specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**


Motor feeders according to IEC with 3NA3 fuses

gG class full-range fuses for cable and line protection according to IEC 60269-2, without semiconductor protection

Type of coordination "1",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)	
Q11	for systems up to 600 V	for systems up to 480 V	for systems up to 600 V
Type	F1	Q21	Q21
Type	Type	Type	Type
Type of coordination "1"	Inline circuit		
3RW5055	3NA3244-6	3RT1055	3RT1055
3RW5056	3NA3244-6	3RT1056	3RT1064
3RW5072	2 x 3NA3354-6	3RT1064	3RT1064
3RW5073	2 x 3NA3354-6	3RT1065	3RT1065
3RW5074	2 x 3NA3365-6	3RT1075	3RT1075
3RW5075	2 x 3NA3365-6	3RT1075	3RT1075
3RW5076	2 x 3NA3365-6	3RT1076	3RT1076
3RW5077	2 x 3NA3365-6	3TF68	3TF68

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**


Motor feeders according to IEC with 3NE1 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)	
Q11	for systems up to 600 V	for systems up to 480 V	for systems up to 600 V
Type	F'1	Q21	Q21
Type	Type	Type	Type
Type of coordination "2"	Inline circuit		
3RW5055	3NE1227-0	3RT1055	3RT1055
3RW5056	3NE1230-0	3RT1056	3RT1064
3RW5072	3NE1230-2	3RT1064	3RT1064
3RW5073	3NE1331-0	3RT1065	3RT1065
3RW5074	3NE1333-2	3RT1075	3RT1075
3RW5075	3NE1334-2	3RT1075	3RT1075
3RW5076	3NE1436-2	3RT1076	3RT1076
3RW5077	3NE1437-2	3TF68	3TF68

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW50 soft starters > General data **NEW**

Motor feeders according to IEC with 3NE3 fuses


aR class partial-range fuses for semiconductor protection

Type of coordination "2",

short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters	gG class fuse	aR class fuse	Line contactor (optional)	
Q11	for systems up to 600 V	for systems up to 600 V	for systems up to 480 V	for systems up to 600 V
Type	F1	F3	Q21	Q21
Type	Type	Type	Type	Type
Type of coordination "2"	<div style="border: 1px solid black; padding: 2px; display: inline-block;">T_{OC} 2</div> Inline circuit			
3RW5055	3NA3244-6	3NE3334-0B	3RT1055	3RT1055
3RW5056	3NA3244-6	3NE3335	3RT1056	3RT1064
3RW5072	2 x 3NA3354-6	3NE3333	3RT1064	3RT1064
3RW5073	2 x 3NA3354-6	3NE3335	3RT1065	3RT1065
3RW5074	2 x 3NA3365-6	3NE3335	3RT1075	3RT1075
3RW5075	2 x 3NA3365-6	3NE3336	3RT1075	3RT1075
3RW5076	2 x 3NA3365-6	3NE3340-8	3RT1076	3RT1076
3RW5077	2 x 3NA3365-6	3NE3340-8	3TF68	3TF68

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3VA circuit breakers can also be used, possibly with reduced short-circuit breaking capacity (see page 7/76). In these cases optional line contactors can be dispensed with.

Basic Performance Soft Starters

3RW50 soft starters > Inline circuit

IE3/IE4 ready

NEW

Selection and ordering data

For normal starting (CLASS 10E)



3RW5055



3RW5075

At 40 °C				Rating [hp] for three-phase motors	Size	SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*		
Operational current	Operating power for three-phase motors											
A	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 480 V												
143	37	75	90	40	50	100	--	S6	5	3RW5055-□□B□4	1	1 unit
171	45	90	110	50	60	125	--	S6	5	3RW5056-□□B□4	1	1 unit
210	55	110	132	60	75	150	--	S12	5	3RW5072-□□B□4	1	1 unit
250	75	132	160	75	100	200	--	S12	5	3RW5073-□□B□4	1	1 unit
315	90	160	200	100	125	250	--	S12	5	3RW5074-□□B□4	1	1 unit
370	110	200	250	125	150	300	--	S12	5	3RW5075-□□B□4	1	1 unit
470	132	250	315	150	150	350	--	S12	5	3RW5076-□□B□4	1	1 unit
570	160	315	355	200	200	450	--	S12	5	3RW5077-□□B□4	1	1 unit

Type of electrical connection for the control circuit

- Spring-loaded terminals
- Screw terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage

- 24 V AC/DC
- 110 ... 250 V AC



¹⁾ 3RW50 soft starter with screw terminals for operational voltage up to 480 V. Standard delivery time SD = 1 day (d).

Note: For the constraints for the motor outputs specified here, see page 7/7.

SOFT STARTERS 7

At 40 °C				Rating [hp] for three-phase motors	Size	SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*		
Operational current	Operating power for three-phase motors											
A	At 230 V	At 400 V	At 500 V	At 200/208 V	At 220/230 V	At 460/480 V	At 575/600 V					
	kW	kW	kW	hp	hp	hp	hp					
Operational voltage 200 ... 600 V												
143	37	75	90	40	50	100	125	S6	5	3RW5055-□□B□5	1	1 unit
171	45	90	110	50	60	125	150	S6	5	3RW5056-□□B□5	1	1 unit
210	55	110	132	60	75	150	200	S12	5	3RW5072-□□B□5	1	1 unit
250	75	132	160	75	100	200	250	S12	5	3RW5073-□□B□5	1	1 unit
315	90	160	200	100	125	250	300	S12	5	3RW5074-□□B□5	1	1 unit
370	110	200	250	125	150	300	350	S12	5	3RW5075-□□B□5	1	1 unit
470	132	250	315	150	150	350	450	S12	5	3RW5076-□□B□5	1	1 unit
570	160	315	355	200	200	450	600	S12	5	3RW5077-□□B□5	1	1 unit

Type of electrical connection for the control circuit

- Spring-loaded terminals
- Screw terminals

Product function

- Analog output
- Thermistor motor protection

Control supply voltage







- 24 V AC/DC
- 110 ... 250 V AC



¹⁾ 3RW50 soft starter with screw terminals for operational voltage up to 600 V. Standard delivery time SD = 2 days (d).







Note: For the constraints for the motor outputs specified here, see page 7/7.

Selection and ordering data

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
Fan covers										
	Fan cover	3RW50 (1x)	--	--	▶	3RW5985-0FC00		1	1 unit	42S
3RW5985-0FC00										
Box terminal block										
	Box terminal block for round and ribbon cables	3RW505 (2x)	Up to 70 mm ²	--	▶	3RT1956-4G		1	1 unit	41B
			Up to 120 mm ²	--	▶	3RT1956-4G		1	1 unit	41B
		3RW507 (2x)	Up to 240 mm ² (with auxiliary conductor connection)	--	▶	3RT1966-4G		1	1 unit	41B
3RT1956-4G										
Terminal covers										
	Covers for box terminals	3RW505 (2x)	--	--	▶	3RT1956-4EA2		1	1 unit	41B
		3RW507 (2x)	--	--	▶	3RT1966-4EA2		1	1 unit	41B
3RT1956-4EA2										
	Covers for cable lugs and busbar connections	3RW505 (2x)	--	--	▶	3RT1956-4EA1		1	1 unit	41B
		3RW507 (2x)	--	--	▶	3RT1966-4EA1		1	1 unit	41B
3RT1956-4EA1										
Communication modules										
	Communication module	3RW50	PROFINET Standard	--	▶	3RW5980-0CS00		1	1 unit	42S
			PROFIBUS	--	▶	3RW5980-0CP00		1	1 unit	42S
			EtherNet/IP	--	▶	3RW5980-0CE00		1	1 unit	42S
			Modbus RTU	--	▶	3RW5980-0CR00		1	1 unit	42S
			Modbus TCP	--	▶	3RW5980-0CT00		1	1 unit	42S
3RW5980-0CS00										
	COM connection cable	3RW50	0.3 m	--	▶	3RW5900-0CC00		1	1 unit	42S
3RW5900-0CC00										
For mounting laterally on the device										

Basic Performance Soft Starters

3RW50 soft starters > Accessories

Product designation	Manufacturer's Article No. of the soft starter	Type of product	Application	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	
HMI modules										
 3RW5980-0HF00	HMI module	3RW50	High Feature	--	▶	3RW5980-0HF00		1	1 unit	42S
 3RW5980-0HS00			Standard	--	▶	3RW5980-0HS00		1	1 unit	42S
 3RW5980-0HD00	IP65 door mounting kit for HMI modules	3RW50	IP65	For HMI modules	▶	3RW5980-0HD00		1	1 unit	42S
Connecting cables										
 3UF793-0BA00-0	HMI connection cable	3RW50	5 m, round	For door mounting	▶	3RW5980-0HC60		1	1 unit	42S
			2.5 m, round		▶	3UF7933-0BA00-0		1	1 unit	42J
			1.0 m, round		▶	3UF7937-0BA00-0		1	1 unit	42J
			0.5 m, round		▶	3UF7932-0BA00-0		1	1 unit	42J
Further accessories										
 3ZY1311-0AA00	Push-in lugs for wall mounting	--	Two lugs are required per device	For HMI modules and communication modules	2	3ZY1311-0AA00		1	10 units	41L
Blank labels										
 3RT2900-1SB20	Unit labeling plates¹⁾	--	20 mm x 7 mm, titanium gray	For SIRIUS devices	20	3RT2900-1SB20		100	340 units	41B

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

Basic Performance Soft Starters

3RW40 soft starters > General data

Overview

More information

Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW40


TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=3rw40>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>



The SIRIUS 3RW40 Basic Performance soft starters are suitable for soft starting and stopping of three-phase asynchronous motors.

Thanks to two-phase control, not only is the current kept at minimum values in all three phases throughout the entire starting time, but disturbing direct current components are also eliminated. This not only enables the two-phase starting of motors from 10 to 100 HP @ 600V but also avoids the current and torque peaks which occur e.g. with wye-delta starters.

The SIRIUS 3RW40 soft starters are suitable for the starting of explosion-proof motors with "increased safety" type of protection EEx e according to ATEX Directive 94/9/EC.

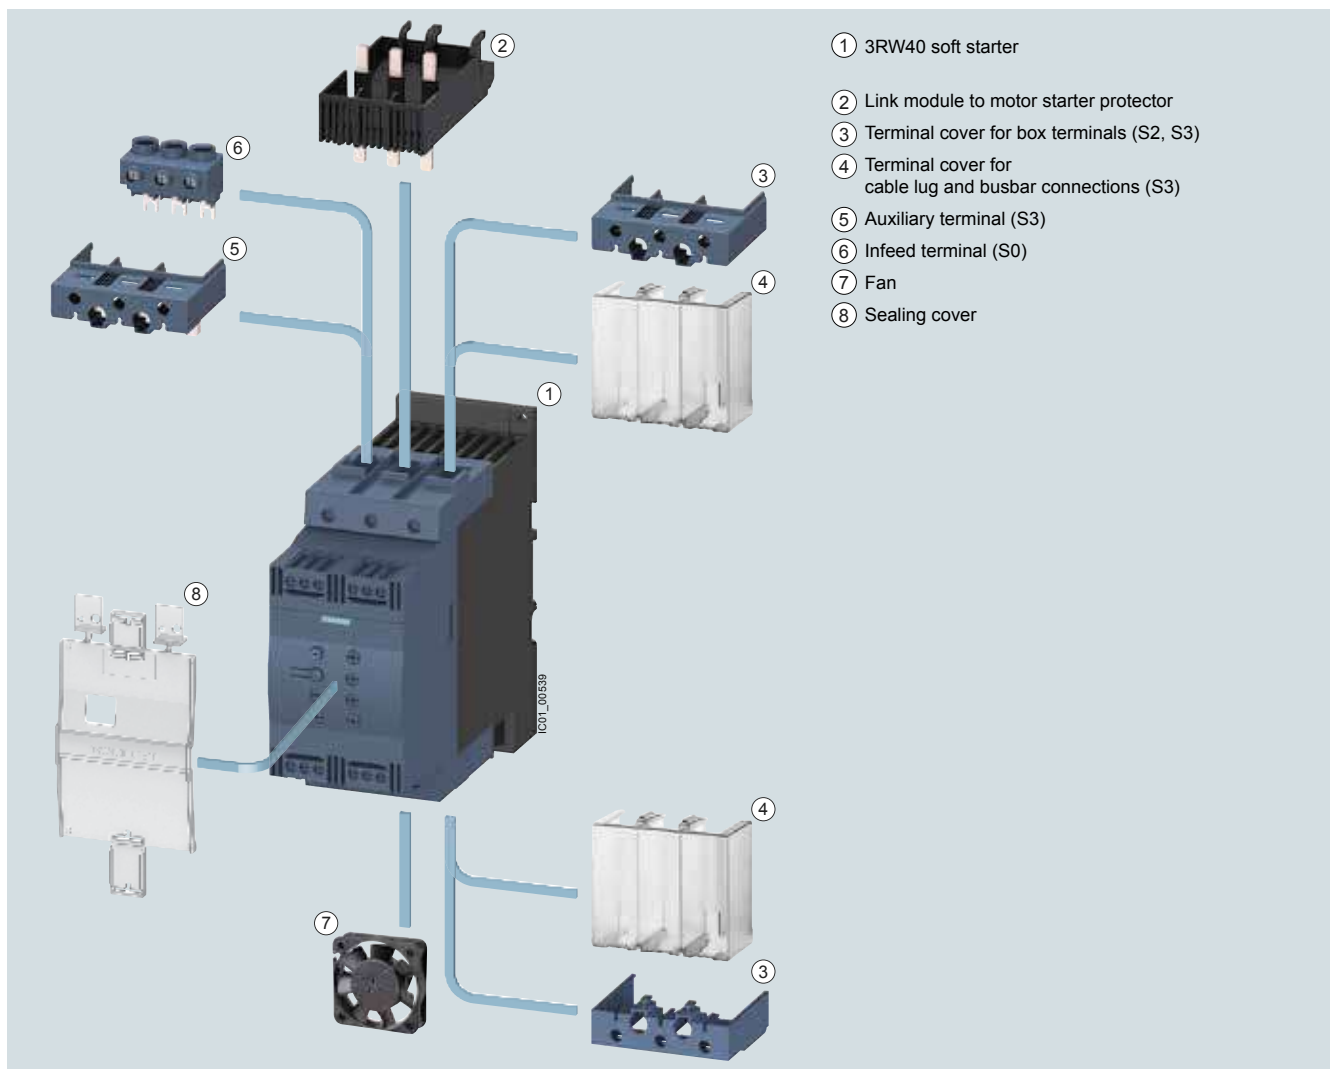

3RW40 Basic Performance soft starters with accessories (see page 7/92)

Basic Performance Soft Starters

3RW40 soft starters > General data

Benefits






Product characteristics / function	Performance features / benefits
Small and compact design	Space-saving, clearly arranged control panel layout
Motor overload and intrinsic device protection without additional wiring	Adjustable trip classes, integrated diagnostics functions
Integrated in the SIRIUS modular system	Link modules to motor starter protectors
Hybrid switching devices and two-phase motor control	Minimum power loss and optimized motor control by avoiding DC components
Certified according to ATEX Directive 94/9/EC	Suitable for the starting of explosion-proof motors with "increased safety" type of protection EEx e.
Optional thermistor motor protection	Full motor protection

Technical specifications

More information

Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/25252/td>
 Equipment Manual "SIRIUS 3RW30/3RW40 Soft Starter", see <https://support.industry.siemens.com/cs/ww/en/view/38752095>

FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/25251/faq>
 Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>

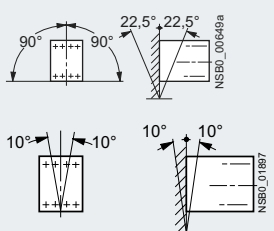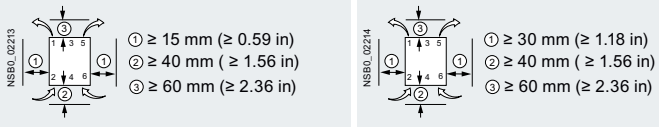Type		3RW402.	3RW403.	3RW404.
Mechanics and environment				
Mounting dimensions (W x H x D)		mm		
<ul style="list-style-type: none"> Screw terminals Spring-loaded terminals 		mm	45 x 125 x 154 45 x 150 x 154	55 x 144 x 170 55 x 144 x 170
Permissible ambient temperature		°C	-25 ... +60; (derating from +40)	
During operation		°C	-40 ... +80	
Weight		kg	0.77	1.35 1.9
Permissible mounting position¹⁾				
<ul style="list-style-type: none"> With auxiliary fan (for 3RW402. ... 3RW404.) Without auxiliary fan (for 3RW402. ... 3RW404.) 				
Installation type¹⁾	Stand-alone installation			
Permissible installation altitude		m	5 000 (Derating from 1 000, see characteristic curve on page 7/7)	
Degree of protection			IP20 for 3RW402.; all others IP00	
¹⁾ In the case of deviations, please observe derating, see Equipment Manual in the chapter "Configuring".				
Type	Terminal	3RW402., 3RW403., 3RW404.		
Control electronics				
Rated values				
Rated control supply voltage	A1/A2	V	24 AC/DC ± 20	110 ... 230 AC/DC -15/+10
Rated frequency		Hz	50/60	
Tolerance		%	± 10	
Type			3RW402.-...B.4, 3RW403.-...B.4, 3RW404.-...B.4	3RW402.-...B.5, 3RW403.-...B.5, 3RW404.-...B.5
Power electronics				
Rated operational voltage		V AC	200 ... 480	400 ... 600
Tolerance		%	-15/+10	
Maximum blocking voltage (thyristor)		V AC	1 600	
Rated frequency		Hz	50/60	
Tolerance		%	± 10	
Uninterrupted duty at 40 °C (% of I_θ)		%	115	
Minimum load (% of smallest adjustable rated motor current I_M)		%	20 (at least 2 A)	
Maximum cable length between soft starter and motor		m	300	

Basic Performance Soft Starters

3RW40 soft starters > General data

Type		3RW4024	3RW4026	3RW4027	3RW4028
Power electronics					
Load rating with rated operational current I_e					
• According to IEC and UL/CSA ¹⁾ , individual mounting at 40/50/60 °C, AC-53a	A	12.5/11/10	25.3/23/21	32.2/29/26	38/34/31
Smallest adjustable rated motor current I_M					
For the motor overload protection	A	5	10	17	23
Power loss					
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W	2	8	13	19
• During starting with current limiting set to 300% I_M (40 °C)	W	68	188	220	256
Permissible rated motor current and starts per hour					
• For normal starting (CLASS 10) at 40/50 °C					
- Rated motor current $I_M^{(2)}$, start-up time 3 s	A	12.5/11	25/23	32/29	38/34
- Starts per hour ³⁾	1/h	50/50	23/23	23/23	19/19
- Rated motor current $I_M^{(2)}$, start-up time 4 s	A	12.5/11	25/23	32/29	38/34
- Starts per hour ³⁾	1/h	36/36	15/15	16/16	12/12
• For heavy starting (CLASS 20) at 40/50 °C					
- Rated motor current $I_M^{(2)}$, start-up time 6 s	A	10/9	21/19	27/24	31/28
- Starts per hour ³⁾	1/h	47/47	21/21	20/20	18/18
- Rated motor current $I_M^{(2)}$, start-up time 8 s	A	10/9	21/19	27/24	31/28
- Starts per hour ³⁾	1/h	34/34	15/15	14/14	13/13

¹⁾ Measurement at 60 °C according to UL/CSA not required.
²⁾ Current limiting on soft starter set to 300% I_M , $T_U = 40/50$ °C. Maximum adjustable rated motor current I_M dependent on CLASS setting.
³⁾ For intermittent duty S4 with ON period = 30%, $T_U = 40/50$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode. Factors for permissible switching frequency in other mounting position, direct mounting, side-by-side mounting, and implementation of optional auxiliary fan, see Equipment Manual in the chapter "Configuring".

Type		3RW4036	3RW4037	3RW4038	3RW4046	3RW4047
Power electronics						
Load rating with rated operational current I_e						
• According to IEC and UL/CSA ¹⁾ , individual mounting at 40/50/60 °C, AC-53a	A	45/42/39	63/58/53	72/62.1/60	80/73/66	106/98/90
Smallest adjustable rated motor current I_M						
For the motor overload protection	A	23	26	35	43	46
Power loss						
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W	6	12	15	12	21
• During starting with current limiting set to 300% I_M (40 °C)	W	316	444	500	576	768
Permissible rated motor current and starts per hour						
• For normal starting (CLASS 10) at 40/50 °C						
- Rated motor current $I_M^{(2)}$, start-up time 3 s	A	45/42	63/58	72/62	80/73	106/98
- Starts per hour ³⁾	1/h	38/38	23/23	22/22	22/22	15/15
- Rated motor current $I_M^{(2)}$, start-up time 4 s	A	45/42	63/58	72/62	80/73	106/98
- Starts per hour ³⁾	1/h	26/26	15/15	15/15	15/15	10/10
• For heavy starting (CLASS 20) at 40/50 °C						
- Rated motor current $I_M^{(2)}$, start-up time 6 s	A	38/34	46/42	50/46	64/58	77/70
- Starts per hour ³⁾	1/h	30/30	31/31	34/34	23/23	23/23
- Rated motor current $I_M^{(2)}$, start-up time 8 s	A	38/34	46/42	50/46	64/58	77/70
- Starts per hour ³⁾	1/h	21/21	22/22	24/24	16/16	16/16

¹⁾ Measurement at 60 °C according to UL/CSA not required.
²⁾ Current limiting on soft starter set to 300% I_M , $T_U = 40/50$ °C. Maximum adjustable rated motor current I_M dependent on CLASS setting.
³⁾ For intermittent duty S4 with ON period = 30%, $T_U = 40/50$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode. Factors for permissible switching frequency in other mounting position, direct mounting, side-by-side mounting, and implementation of optional auxiliary fan, see Equipment Manual in the chapter "Configuring".

Basic Performance Soft Starters


3RW40 soft starters > General data

Motor feeders according to IEC with 3RV2 motor starter protectors (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_q in kA, see table

Note:

For general recommendations for constructing motor feeders with soft starters, see page 7/9.



Soft starters		Motor starter protectors		
		for 400 V systems	for 500 V systems	
Q11		Q1	Q1	
Type		Type	Type	Type
		I_q kA		I_q kA
Type of coordination "1"	TOC 1	Inline circuit		
3RW4024	3RV2021-4AA10	55	3RV2021-4AA10	10
3RW4026	3RV2021-4DA10	55	3RV2021-4DA10	10
3RW4027	3RV2021-4EA10	55	3RV2021-4EA10	10
3RW4028	3RV2021-4FA10	55	3RV2021-4FA10	10
3RW4036	3RV2031-4WA10	10	3RV2031-4WA10	10
3RW4037	3RV2031-4JA10	10	3RV2031-4JA10	5
3RW4038	3RV2031-4KA10	10	3RV2031-4KA10	5
3RW4046	3RV2041-4RA10	11	3RV2041-4YA10	5
3RW4047	3RV2041-4MA10	11	3RV2041-4MA10	5

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW40 soft starters > General data


Motor feeders according to IEC with 3NE1 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)		
	for systems up to 600 V	for systems up to 400 V	for systems up to 480 V	for systems up to 600 V
Q11	F'1	Q21	Q21	Q21
Type	Type	Type	Type	Type
Type of coordination "2"	Inline circuit			
3RW4024	3NE1814-0	3RT2025	3RT2025/ 3RT2018 (in size S00)	3RT2025
3RW4026	3NE1803-0	3RT2026	3RT2027	3RT2037
3RW4027	3NE1020-2	3RT2027	3RT2028	3RT2037
3RW4028	3NE1020-2	3RT2028	3RT2035	3RT2037
3RW4036	3NE1020-2	3RT2036	3RT2036	3RT2038
3RW4037	3NE1820-0	3RT2037	3RT2037	3RT2046
3RW4038	3NE1820-0	3RT2038	3RT2038	3RT2046
3RW4046	3NE1021-0	3RT2045	3RT2045	3RT2047
3RW4047	3NE1022-0	3RT2047	3RT2047	3RT1054

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW40 soft starters > General data


Motor feeders according to IEC with 3NE8 / 3NE4 / 3NE3 / 3NC fuses

aR class partial-range fuses for semiconductor protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	aR class fuse				Cylindrical fuses	Line contactor (optional)		
	for systems up to 600 V	for systems up to 600 V	for systems up to 600 V	for systems up to 600 V	for systems up to 480 V	for systems up to 400 V	for systems up to 480 V	for systems up to 600 V	
Q11	F1	F3	F3	F3	F3	Q21	Q21	Q21	
Type	Type	Type	Type	Type	Type	Type	Type	Type	
Type of coordination "2"	Inline circuit								
3RW4024	3NA3820-6	--	3NE4101	3NE8015-1	3NC2240	3RT2025	3RT2025/ 3RT2018 (in size S00)	3RT2025	
3RW4026	3NA3822-6	--	3NE4102	3NE8017-1	3NC2263	3RT2026	3RT2027	3RT2037	
3RW4027	3NA3824-6	--	3NE4118	3NE8018-1	3NC2280	3RT2027	3RT2028	3RT2037	
3RW4028	3NA3824-6	--	3NE4118	3NE8020-1	3NC2280	3RT2028	3RT2035	3RT2037	
3RW4036	3NA3130-6	--	3NE4120	3NE8020-1	3NC2280	3RT2036	3RT2036	3RT2038	
3RW4037	3NA3132-6	--	3NE4121	3NE8021-1	--	3RT2037	3RT2037	3RT2046	
3RW4038	3NA3132-6	3NE3221	--	3NE8022-1	--	3RT2038	3RT2038	3RT2046	
3RW4046	3NA3136-6	3NE3222	--	3NE8022-1	--	3RT2045	3RT2045	3RT2047	
3RW4047	3NA3136-6	3NE3224	--	3NE8024-1	--	3RT2047	3RT2047	3RT1054	

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3RV2 motor starter protectors can also be used, possibly with reduced short-circuit breaking capacity ([see page 7/87](#)). In these cases, optional line contactors can be dispensed with.

Basic Performance Soft Starters

3RW40 soft starters > Inline circuit **IE3/IE4 ready**

Selection and ordering data

For normal starting (CLASS 10)



3RW402.



3RW403.



3RW404.

3RW ambient temperature 40 °C								Size	SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Rated values of three-phase motors													
Operational current I_e	Rating at operational voltage U_e			Rating at operational voltage U_e				d					
	230 V	400 V	500 V	200 V	230 V	460 V	575 V						
A	kW	kW	kW	hp	hp	hp	hp						
Rated operational voltage U_e 200 ... 480 V													
12.5	3	5.5	--	3	3	7.5	--	S0	2	3RW4024-□BB□4		1	1 unit
25	5.5	11	--	7.5	7.5	15	--	S0	2	3RW4026-□BB□4		1	1 unit
32	7.5	15	--	10	10	20	--	S0	2	3RW4027-□BB□4		1	1 unit
38	11	18.5	--	10	10	25	--	S0	2	3RW4028-□BB□4		1	1 unit
45	11	22	--	10	15	30	--	S2	2	3RW4036-□BB□4		1	1 unit
63	18.5	30	--	20	20	40	--	S2	2	3RW4037-□BB□4		1	1 unit
72	22	37	--	20	25	50	--	S2	2	3RW4038-□BB□4		1	1 unit
80	22	45	--	25	30	60	--	S3	2	3RW4046-□BB□4		1	1 unit
106	30	55	--	30	40	75	--	S3	2	3RW4047-□BB□4		1	1 unit
Rated operational voltage U_e 400 ... 600 V													
12.5	--	5.5	7.5	--	--	7.5	10	S0	5	3RW4024-□BB□5		1	1 unit
25	--	11	15	--	--	15	20	S0	5	3RW4026-□BB□5		1	1 unit
32	--	15	18.5	--	--	20	30	S0	5	3RW4027-□BB□5		1	1 unit
38	--	18.5	22	--	--	25	30	S0	5	3RW4028-□BB□5		1	1 unit
45	--	22	30	--	--	30	40	S2	5	3RW4036-□BB□5		1	1 unit
63	--	30	37	--	--	40	60	S2	5	3RW4037-□BB□5		1	1 unit
72	--	37	45	--	--	50	60	S2	5	3RW4038-□BB□5		1	1 unit
80	--	45	55	--	--	60	75	S3	5	3RW4046-□BB□5		1	1 unit
106	--	55	75	--	--	75	100	S3	5	3RW4047-□BB□5		1	1 unit

Article No. supplement for connection types

- Screw terminals
- Spring-loaded terminals²⁾

Control supply voltage


- 24 V AC/DC
- 110 ... 230 V AC/DC

¹⁾ Soft starter U_e 200 to 480 V with screw terminals: Standard delivery time SD = 1 day (d).

²⁾ Main connection from size S2: screw terminals.

Note:

For the constraints for the motor outputs specified here, see page 7/7.



Basic Performance Soft Starters

3RW40 soft starters > Inline circuit **IE3/IE4 ready**

For normal starting (CLASS 10)



3RW402.



3RW403.



3RW404.

3RW ambient temperature 40 °C								Size	SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Rated values of three-phase motors													
Operational current I_e	Rating at operational voltage U_e			Rating at operational voltage U_e				d					
	230 V	400 V	500 V	200 V	230 V	460 V	575 V						
A	kW	kW	kW	hp	hp	hp	hp						
Rated operational voltage U_e 200 ... 480 V, with thermistor motor protection, rated control supply voltage U_s 24 V AC/DC													
12.5	3	5.5	--	3	3	7.5	--	S0	5	3RW4024-□TB04		1	1 unit
25	5.5	11	--	7.5	7.5	15	--	S0	5	3RW4026-□TB04		1	1 unit
32	7.5	15	--	10	10	20	--	S0	5	3RW4027-□TB04		1	1 unit
38	11	18.5	--	10	10	25	--	S0	5	3RW4028-□TB04		1	1 unit
45	11	22	--	10	15	30	--	S2	5	3RW4036-□TB04		1	1 unit
63	18.5	30	--	20	20	40	--	S2	5	3RW4037-□TB04		1	1 unit
72	22	37	--	20	25	50	--	S2	5	3RW4038-□TB04		1	1 unit
80	22	45	--	25	30	60	--	S3	5	3RW4046-□TB04		1	1 unit
106	30	55	--	30	40	75	--	S3	5	3RW4047-□TB04		1	1 unit
Rated operational voltage U_e 400 ... 600 V, with thermistor motor protection, rated control supply voltage U_s 24 V AC/DC													
12.5	--	5.5	7.5	--	--	7.5	10	S0	5	3RW4024-□TB05		1	1 unit
25	--	11	15	--	--	15	20	S0	5	3RW4026-□TB05		1	1 unit
32	--	15	18.5	--	--	20	30	S0	5	3RW4027-□TB05		1	1 unit
38	--	18.5	22	--	--	25	30	S0	5	3RW4028-□TB05		1	1 unit
45	--	22	30	--	--	30	40	S2	5	3RW4036-□TB05		1	1 unit
63	--	30	37	--	--	40	60	S2	5	3RW4037-□TB05		1	1 unit
72	--	37	45	--	--	50	60	S2	5	3RW4038-□TB05		1	1 unit
80	--	45	55	--	--	60	75	S3	5	3RW4046-□TB05		1	1 unit
106	--	55	75	--	--	75	100	S3	5	3RW4047-□TB05		1	1 unit

Article No. supplement for connection types

- Screw terminals
- Spring-loaded terminals²⁾

¹⁾ Soft starter U_e 200 to 480 V with screw terminals: Standard delivery time SD = 1 day (d).

²⁾ Main connection from size S2: screw terminals.

Note:

For the constraints for the motor outputs specified here, see page 7/7.

1
2

Basic Performance Soft Starters

3RW40 soft starters > Accessories

Selection and ordering data

Conductor cross-section			Tightening torque	For soft starters size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Solid or stranded	Finely stranded with end sleeve	AWG cables, solid or stranded							
mm ²	mm ²	AWG	Nm		d				

Three-phase infeed terminals



3RV2925-5AB

2.5 ... 25	2.5 ... 16	10 ... 4	3 ... 4	S0 (3RW402.)		3RV2925-5AB		1	1 unit
------------	------------	----------	---------	------------------------	--	--------------------	--	---	--------

For soft starters		Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type	Size						
			d				

Auxiliary terminals



3RT2946-4F

Auxiliary terminals, 3-pole			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
3RW404.	Size	Description					
	S3	For connection of auxiliary and control cables (0.5 ... 2.5 mm ²) to the main conductor terminals	5	3RT2946-4F		1	1 unit

Covers for soft starters



3RT2936-4EA2

Terminal covers for box terminals			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
3RW403.	Size	Description					
	S2	Additional touch protection to be fitted at the box terminals (two units required per device)	▶	3RT2936-4EA2		1	1 unit
3RW404.	S3			3RT2946-4EA2		1	1 unit



3RT1946-4EA1

Terminal covers for cable lugs and busbar connections			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
3RW404.	Size	Description					
	S3	For complying with the voltage clearances and as touch protection if box terminal is removed (two units required per device)	5	3RT1946-4EA1		1	1 unit



3RW4900-0PB10

Sealing covers			SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
3RW402. to 3RW404.	Size	Description					
	S0, S2, S3	--	5	3RW4900-0PB10		1	1 unit

Basic Performance Soft Starters

3RW40 soft starters > Accessories

For motor starter protectors	For soft starters	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Size	Size		d				

Standard mounting rail adapters



3RA2932-1CA00

S2	S2	For mechanical fixing of motor starter protector and soft starter; for snapping onto standard mounting rail or for screw fixing Single-unit packaging	2	3RA2932-1CA00		1	1 unit
-----------	-----------	---	---	----------------------	--	---	--------

For soft starters	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type	d				
Size					

Fans (to increase switching frequency and for device mounting in positions different to the standard position)



3RW49...-8VB00


3RW402.	S0		▶	3RW4928-8VB00		1	1 unit
3RW403., 3RW404.	S2, S3		▶	3RW4947-8VB00		1	1 unit

For soft starters	Motor starter protectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type	Size	d				
Size	Size					

Link modules to motor starter protectors¹⁾



3RA2921-1BA00



3RA2921-2GA00

3RW402.	S0	S00/S0	2	3RA2921-1BA00		1	1 unit
3RW4036	S2	S2	▶	3RA2931-1AA00		1	1 unit
3RW404.	S3	S3	▶	3RA1941-1AA00		1	1 unit
3RW402.	S0	S0	2	3RA2921-2GA00		1	1 unit

Screw terminals



Spring-loaded terminals



¹⁾ Can be used in size S0 up to 32 A.
Can be used in size S2 up to 65 A in combination with 3RA2932-1CA00 standard mounting rail adapter (specially for soft starters).
Can be used in size S3 only with mounting plate.

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
	d				

Tools for opening spring-loaded terminals in sizes S00 and S0




3RA2908-1A

Screwdrivers For all SIRIUS devices with spring-loaded terminals Length approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated	2	3RA2908-1A		1	1 unit
--	---	-------------------	--	---	--------

Spring-loaded terminals



Blank labels



3RT2900-1SB20

Unit labeling plates¹⁾ For SIRIUS devices 20 mm x 7 mm, titanium gray	20	3RT2900-1SB20		100	340 units
---	----	----------------------	--	-----	-----------

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

Basic Performance Soft Starters

3RW30 soft starters > General data

Overview

More information


Homepage, see www.siemens.com/softstarter
 Industry Mall, see www.siemens.com/product?3RW
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=3rw30>

Simulation Tool for Soft Starters (STS), see page 7/7 or <https://support.industry.siemens.com/cs/ww/en/view/101494917>
 SIRIUS Soft Starter ES (TIA Portal), see page 7/7



The SIRIUS 3RW30 Basic Performance soft starters are suitable for soft starting of three-phase asynchronous motors.

Thanks to two-phase control, not only is the current kept at minimum values in all three phases throughout the entire starting time, but disturbing direct current components are also eliminated. This not only enables the two-phase starting of motors from 2 to 75HP @ 480V but also avoids the current and torque peaks which occur e.g. with wye-delta starters.

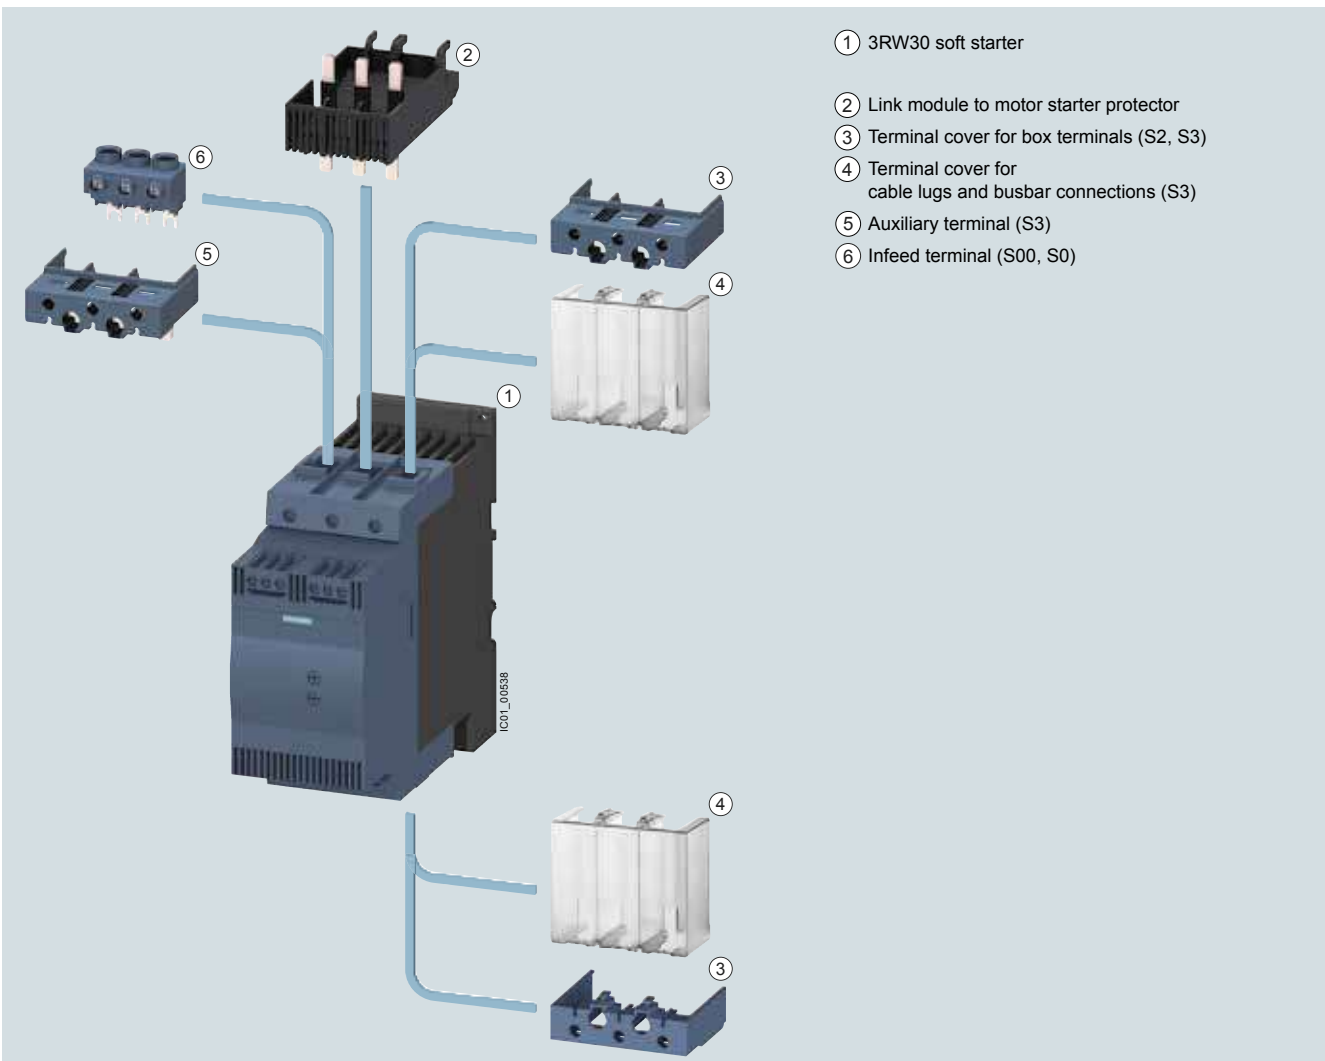

- ① 3RW30 soft starter
- ② Link module to motor starter protector
- ③ Terminal cover for box terminals (S2, S3)
- ④ Terminal cover for cable lugs and busbar connections (S3)
- ⑤ Auxiliary terminal (S3)
- ⑥ Infeed terminal (S00, S0)

3RW30 Basic Performance soft starters with accessories (see page 7/103)

Benefits



Product characteristics / function	Performance features / benefits
Small and compact design	Space-saving, clearly arranged control panel layout
Parameterization using potentiometers	Simple and fast commissioning
Integrated in the SIRIUS modular system	Link modules to motor starter protectors
Hybrid switching devices and two-phase motor control	Minimum power loss and optimized motor control by avoiding DC components

Technical specifications

More information

Equipment Manual "SIRIUS 3RW30/3RW40 Soft Starters", see <https://support.industry.siemens.com/cs/ww/en/view/38752095>
 FAQs, see <https://support.industry.siemens.com/cs/ww/en/ps/16213/faq>

Catalog LV 10, see www.siemens.com/lowvoltage/lv10

Type		3RW301.	3RW302.	3RW303.	3RW304.
Mechanics and environment					
Mounting dimensions (W x H x D)					
• Screw terminals • Spring-loaded terminals		mm 45 x 95 x 151	45 x 125 x 151 45 x 150 x 151	55 x 144 x 168 55 x 144 x 168	70 x 160 x 186 70 x 160 x 186
Permissible ambient temperature					
During operation	°C	-25 ... +60; (derating from +40)			
During storage	°C	-40 ... +80			
Weight	kg	0.58	0.69	1.20	1.71
Permissible mounting position¹⁾ (auxiliary fan not possible)					
Installation type¹⁾	Stand-alone installation				
		① ≥ 15 mm (≥ 0.59 in) ② ≥ 40 mm (≥ 1.56 in) ③ ≥ 60 mm (≥ 2.36 in)		① ≥ 30 mm (≥ 1.18 in) ② ≥ 40 mm (≥ 1.56 in) ③ ≥ 60 mm (≥ 2.36 in)	
Permissible installation altitude	m	5 000 (Derating from 1 000, see characteristic curve on page 7/7)			
Degree of protection		IP20 for 3RW301. and 3RW302.; IP00 for 3RW303. and 3RW304.			

¹⁾ In the case of deviations, please observe derating, see Equipment Manual in the chapter "Configuring".



Basic Performance Soft Starters

3RW30 soft starters > General data

Type	Terminal		3RW301., 3RW302.		3RW303., 3RW304.		
Control electronics							
Rated values							
Rated control supply voltage	A1/A2	V	24	110 ... 230	24	110 ... 230	
• Tolerance		%	20	-15/+10	20	-15/+10	
Rated frequency		Hz	50/60				
• Tolerance		%	± 10				
Type			3RW301.	3RW302.	3RW303.	3RW304.	
Power electronics							
Rated operational voltage							
Tolerance		V AC	200 ... 480				
		%	-15/+10				
Rated frequency							
Tolerance		Hz	50/60				
		%	10				
Uninterrupted duty at 40 °C (% of I_e)							
		%	115				
Minimum load (% of I_e)							
		%	10 (at least 1 A)				
Maximum cable length between soft starter and motor							
		m	300				
Type			3RW3013	3RW3014	3RW3016	3RW3017	3RW3018
Power electronics							
Load rating with rated operational current I_e							
• According to IEC and UL/CSA ¹⁾ , individual mounting at 40/50/60 °C, AC-53a	A		3.6/3.3/3	6.5/6/5.5	9/8/7	12.5/12/11	17.6/17/14
Power loss							
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W		0.25	0.5	1	2	4
• During starting with 300% I_M (40 °C)	W		24	52	80	80	116
Permissible rated motor current and starts per hour							
• For normal starting (CLASS 10) at 40/50 °C							
- Rated motor current $I_M^{(2)}$, start-up time 3 s	A		3.6/3.3	6.5/6.0	9/8	12.5/12.0	17.6/17.0
- Starts per hour ³⁾	1/h		200/150	87/60	50/50	85/70	62/46
- Rated motor current $I_M^{(2)}$, start-up time 4 s	A		3.6/3.3	6.5/6.0	9/8	12.5/12.0	17.6/17.0
- Starts per hour ³⁾	1/h		150/100	64/46	35/35	62/47	45/32
¹⁾ Measurement at 60 °C according to UL/CSA not required. ²⁾ At 300% I_M , $T_U = 40/50$ °C. ³⁾ For intermittent duty S4 with ON period = 30%, $T_U = 40/50$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.							
Type			3RW3026	3RW3027	3RW3028		
Power electronics							
Load rating with rated operational current I_e							
• According to IEC and UL/CSA ¹⁾ , individual mounting at 40/50/60 °C, AC-53a	A		25.3/23/21	32.2/29/26	38/34/31		
Power loss							
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W		8	13	19		
• During starting with 300% I_M (40 °C)	W		188	220	256		
Permissible rated motor current and starts per hour							
• For normal starting (CLASS 10) at 40/50 °C							
- Rated motor current $I_M^{(2)}$, start-up time 3 s	A		25/23	32/29	38/34		
- Starts per hour ³⁾	1/h		23/23	23/23	19/19		
- Rated motor current $I_M^{(2)}$, start-up time 4 s	A		25/23	32/29	38/34		
- Starts per hour ³⁾	1/h		15/15	16/16	12/12		
¹⁾ Measurement at 60 °C according to UL/CSA not required. ²⁾ At 300% I_M , $T_U = 40/50$ °C. ³⁾ For intermittent duty S4 with ON period = 30%, $T_U = 40/50$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode. Factors for permissible switching frequency with deviating mounting position, direct mounting, side-by-side mounting, see Equipment Manual in the chapter "Configuring" .							
Type			3RW3036	3RW3037	3RW3038	3RW3046	3RW3047
Power electronics							
Load rating with rated operational current I_e							
• According to IEC and UL/CSA ¹⁾ , individual mounting at 40/50/60 °C, AC-53a	A		45/42/39	65/58/53	72/62.1/60	80/73/66	106/98/90
Power loss							
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W		6	12	15	12	21
• During starting with 300% I_M (40 °C)	W		316	444	500	576	768
Permissible rated motor current and starts per hour							
• For normal starting (CLASS 10) at 40/50 °C							
- Rated motor current $I_M^{(2)}$, start-up time 3 s	A		45/42	63/58	72/62	80/73	106/108
- Starts per hour ³⁾	1/h		38/38	23/23	22/22	22/22	15/15
- Rated motor current $I_M^{(2)}$, start-up time 4 s	A		45/42	63/58	72/62	80/73	106/98
- Starts per hour ³⁾	1/h		26/26	15/15	15/15	15/15	10/10
¹⁾ Measurement at 60 °C according to UL/CSA not required. ²⁾ At 300% I_M , $T_U = 40/50$ °C. ³⁾ For intermittent duty S4 with ON period = 30%, $T_U = 40/50$ °C, stand-alone installation vertical. The quoted switching frequencies do not apply for automatic mode.							

Basic Performance Soft Starters

3RW30 soft starters > General data

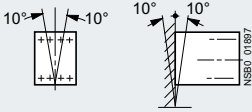Type		3RW3003-1CB54	3RW3003-2CB54
Mechanics and environment			
Mounting dimensions (W x H x D) • Screw terminals • Spring-loaded terminals		mm mm	22.5 x 100 x 120 -- 22.5 x 101.6 x 120
Permissible ambient temperature		°C	-25 ... +60; (derating from +40)
During operation		°C	-40 ... +80
During storage			
Weight		kg	0.207 0.188
Permissible mounting position			
Permissible installation altitude	m		5 000 (Derating from 1 000, see characteristic curve on page 7/7)
Degree of protection acc. to IEC 60529			IP20 (IP00 terminal compartment)
Control electronics			
Rated values			
Rated control supply voltage	V		24 ... 230 AC/DC
• Tolerance	%		± 10
Rated frequency at AC	Hz		50/60
• Tolerance	%		± 10
Power electronics			
Rated operational voltage	V AC		200 ... 400
Tolerance	%		± 10
Rated frequency	Hz		50/60
Tolerance	%		± 10
Uninterrupted duty (% of I_e)	%		100
Minimum load ¹⁾ (% of I_e); at 40 °C	%		9
Maximum conductor length between soft starter and motor	m		100 ²⁾
Load rating with rated operational current I_e			
• According to IEC and UL/CSA, individual mounting at 40/50/60 °C, AC-53a	A		3/2.6/2.2
• According to IEC and UL/CSA, side-by-side mounting at 40/50/60 °C, AC-53a	A		2.6/2.2/1.8
Power loss			
• In operation after completed starting with uninterrupted rated operational current (40 °C) approx.	W		6.5
• With utilization of maximum switching frequency	W		3
Permissible starts per hour (cannot be increased by using a fan)			
• For intermittent duty S4 $T_U = 40$ °C, stand-alone installation vertical	1/h		1 500
• ON period = 70% for 300% I_e	1/s		0.2
Dead time after uninterrupted duty with I_e before restart	s		0

¹⁾ The rated motor current (specified on the motor's name plate) should at least amount to the specified percentage of the SIRIUS soft starter unit's rated operational current I_e .

²⁾ If this value is exceeded, problems with line capacities may arise, which can result in false firing.

Basic Performance Soft Starters


3RW30 soft starters > General data

Motor feeders according to IEC with 3RV2 motor starter protectors (without semiconductor protection)

Type of coordination "1", CLASS 10, short-circuit breaking capacity I_q in kA, [see table](#)

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	Motor starter protectors	
	for 400 V systems	
Q11	Q1	I_q
Type	Type	kA
Type of coordination "1"	Inline circuit	
3RW3003	3RV2011-1EA10	50
3RW3013	3RV2011-1FA10	5
3RW3014	3RV2011-1HA10	5
3RW3016	3RV2011-1JA10	5
3RW3017	3RV2011-1KA10	5
3RW3018	3RV2021-4BA10	5
3RW3026	3RV2021-4DA10	55
3RW3027	3RV2021-4EA10	55
3RW3028	3RV2021-4FA10	55
3RW3036	3RV2031-4WA10	10
3RW3037	3RV2031-4JA10	10
3RW3038	3RV2031-4KA10	10
3RW3046	3RV2041-4RA10	11
3RW3047	3RV2041-4MA10	11

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller motor starter protectors/circuit breakers than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW30 soft starters > General data


Motor feeders according to IEC with 3NA3 fuses

gG class full-range fuses for cable and line protection according to IEC 60269-2, without semiconductor protection

Type of coordination "1",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)	
Q11	for systems up to 480 V	for systems up to 400 V	for systems up to 480 V
Type	F1	Q21	Q21
Type	Type	Type	Type
Type of coordination "1"	Inline circuit		
3RW3003¹⁾	3NA3805 ²⁾	3RT2015	3RT2015
3RW3013	3NA3803-6	3RT2015	3RT2015
3RW3014	3NA3805-6	3RT2015	3RT2016
3RW3016	3NA3807-6	3RT2016	3RT2017
3RW3017	3NA3810-6	3RT2018	3RT2025
3RW3018	3NA3814-6	3RT2026	3RT2026
3RW3026	3NA3822-6	3RT2026	3RT2027
3RW3027	3NA3824-6	3RT2027	3RT2028
3RW3028	3NA3824-6	3RT2028	3RT2035
3RW3036	3NA3130-6	3RT2036	3RT2036
3RW3037	3NA3132-6	3RT2037	3RT2037
3RW3038	3NA3132-6	3RT2038	3RT2038
3RW3046	3NA3136-6	3RT2045	3RT2045
3RW3047	3NA3136-6	3RT2047	3RT2047

¹⁾ $I_q = 50 \text{ kA}$ at 400 V.

²⁾ 3NA3805-1 (NH00), 5SB261 (DIAZED), 5SE2201-6 (NEOZED).

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW30 soft starters > General data


Motor feeders according to IEC with 3NE1 SITOR fuses

gR class full-range fuses for semiconductor protection, cable and line protection

Type of coordination "2",
short-circuit breaking capacity $I_q = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	Line contactor (optional)																																																													
Q11	for systems up to 480 V	for systems up to 400 V	for systems up to 480 V																																																												
Type	F'1	Q21	Q21																																																												
Type	Type	Type	Type																																																												
Type of coordination "2"	<table border="1"> <thead> <tr> <th colspan="4">Inline circuit</th> </tr> <tr> <th>3RW3003¹⁾</th> <th>3NE1813-0²⁾</th> <th>3RT2015</th> <th>3RT2015</th> </tr> </thead> <tbody> <tr> <td>3RW3013</td> <td>3NE1813-0</td> <td>3RT2015</td> <td>3RT2015</td> </tr> <tr> <td>3RW3014</td> <td>3NE1813-0</td> <td>3RT2015</td> <td>3RT2016</td> </tr> <tr> <td>3RW3016</td> <td>3NE1813-0</td> <td>3RT2016</td> <td>3RT2017</td> </tr> <tr> <td>3RW3017</td> <td>3NE1813-0</td> <td>3RT2018</td> <td>3RT2025</td> </tr> <tr> <td>3RW3018</td> <td>3NE1814-0</td> <td>3RT2026</td> <td>3RT2026</td> </tr> <tr> <td>3RW3026</td> <td>3NE1803-0</td> <td>3RT2026</td> <td>3RT2027</td> </tr> <tr> <td>3RW3027</td> <td>3NE1020-2</td> <td>3RT2027</td> <td>3RT2028</td> </tr> <tr> <td>3RW3028</td> <td>3NE1020-2</td> <td>3RT2028</td> <td>3RT2035</td> </tr> <tr> <td>3RW3036</td> <td>3NE1020-2</td> <td>3RT2036</td> <td>3RT2036</td> </tr> <tr> <td>3RW3037</td> <td>3NE1820-0</td> <td>3RT2037</td> <td>3RT2037</td> </tr> <tr> <td>3RW3038</td> <td>3NE1820-0</td> <td>3RT2038</td> <td>3RT2038</td> </tr> <tr> <td>3RW3046</td> <td>3NE1021-0</td> <td>3RT2045</td> <td>3RT2045</td> </tr> <tr> <td>3RW3047</td> <td>3NE1022-0</td> <td>3RT2047</td> <td>3RT2047</td> </tr> </tbody> </table>			Inline circuit				3RW3003 ¹⁾	3NE1813-0 ²⁾	3RT2015	3RT2015	3RW3013	3NE1813-0	3RT2015	3RT2015	3RW3014	3NE1813-0	3RT2015	3RT2016	3RW3016	3NE1813-0	3RT2016	3RT2017	3RW3017	3NE1813-0	3RT2018	3RT2025	3RW3018	3NE1814-0	3RT2026	3RT2026	3RW3026	3NE1803-0	3RT2026	3RT2027	3RW3027	3NE1020-2	3RT2027	3RT2028	3RW3028	3NE1020-2	3RT2028	3RT2035	3RW3036	3NE1020-2	3RT2036	3RT2036	3RW3037	3NE1820-0	3RT2037	3RT2037	3RW3038	3NE1820-0	3RT2038	3RT2038	3RW3046	3NE1021-0	3RT2045	3RT2045	3RW3047	3NE1022-0	3RT2047	3RT2047
Inline circuit																																																															
3RW3003 ¹⁾	3NE1813-0 ²⁾	3RT2015	3RT2015																																																												
3RW3013	3NE1813-0	3RT2015	3RT2015																																																												
3RW3014	3NE1813-0	3RT2015	3RT2016																																																												
3RW3016	3NE1813-0	3RT2016	3RT2017																																																												
3RW3017	3NE1813-0	3RT2018	3RT2025																																																												
3RW3018	3NE1814-0	3RT2026	3RT2026																																																												
3RW3026	3NE1803-0	3RT2026	3RT2027																																																												
3RW3027	3NE1020-2	3RT2027	3RT2028																																																												
3RW3028	3NE1020-2	3RT2028	3RT2035																																																												
3RW3036	3NE1020-2	3RT2036	3RT2036																																																												
3RW3037	3NE1820-0	3RT2037	3RT2037																																																												
3RW3038	3NE1820-0	3RT2038	3RT2038																																																												
3RW3046	3NE1021-0	3RT2045	3RT2045																																																												
3RW3047	3NE1022-0	3RT2047	3RT2047																																																												

¹⁾ $I_q = 50 \text{ kA}$ at 400 V.

²⁾ No SITOR fuse required!
Alternatively: 3NA3803 (NH00), 5SB221 (DIAZED), 5SE2206 (NEOZED).

Note:

The specified short-circuit breaking capacities I_q in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

Basic Performance Soft Starters

3RW30 soft starters > General data


Motor feeders according to IEC with 3NE8 / 3NE4 / 3NE3 / 3NC fuses

aR class partial-range fuses for semiconductor protection

Type of coordination "2",
short-circuit breaking capacity $I_{q} = 65 \text{ kA}$

Note:

For general recommendations for constructing motor feeders with soft starters, [see page 7/9](#).



Soft starters	gG class fuse	aR class fuse			Cylindrical fuses	Line contactor (optional)	
Q11	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 480 V	for systems up to 400 V	for systems up to 480 V
Type	F1	F3	F3	F3	F3	Q21	Q21
Type	Type	Type	Type	Type	Type	Type	Type
Type of coordination "2"	Inline circuit						
	<small>ToC 2</small>						
3RW3003¹⁾	3NA3805 ²⁾	--	--	3NE8015-1	3NC1010	3RT2015	3RT2015
3RW3013	3NA3803-6	--	3NE4101	3NE8015-1	3NC2220	3RT2015	3RT2015
3RW3014	3NA3805-6	--	3NE4101	3NE8015-1	3NC2220	3RT2015	3RT2016
3RW3016	3NA3807-6	--	3NE4101	3NE8015-1	3NC2220	3RT2016	3RT2017
3RW3017	3NA3810-6	--	3NE4101	3NE8015-1	3NC2250	3RT2018	3RT2025
3RW3018	3NA3814-6	--	3NE4101	3NE8003-1	3NC2263	3RT2026	3RT2026
3RW3026	3NA3822-6	--	3NE4102	3NE8017-1	3NC2263	3RT2026	3RT2027
3RW3027	3NA3824-6	--	3NE4118	3NE8018-1	3NC2280	3RT2027	3RT2028
3RW3028	3NA3824-6	--	3NE4118	3NE8020-1	3NC2280	3RT2028	3RT2035
3RW3036	3NA3130-6	--	3NE4120	3NE8020-1	3NC2280	3RT2036	3RT2036
3RW3037	3NA3132-6	--	3NE4121	3NE8021-1	--	3RT2037	3RT2037
3RW3038	3NA3132-6	3NE3221	--	3NE8022-1	--	3RT2038	3RT2038
3RW3046	3NA3136-6	3NE3222	--	3NE8022-1	--	3RT2045	3RT2045
3RW3047	3NA3136-6	3NE3224	--	3NE8024-1	--	3RT2047	3RT2047

¹⁾ $I_{q} = 50 \text{ kA}$ at 400 V.

²⁾ 3NA3805-1 (NH00), 5SB261 (DIAZED).

Note:

The specified short-circuit breaking capacities I_{q} in kA are covered by combination tests. Smaller fuses than those specified can be used at any time as smaller ones trip more quickly in the event of a short circuit (unchanged short-circuit breaking capacity) and thus protect the soft starter in any case. The dimensioning of the short-circuit components must, however, be suitable for the connected three-phase motor and the line protection for the cables used.

For CLASS 10 applications, as an alternative to the gG class full-range fuses for cable and line protection 3NA3 (F1), 3RV2 motor starter protectors/circuit breakers can also be used, possibly with reduced short-circuit breaking capacity ([see page 7/98](#)). In these cases, optional line contactors can be dispensed with.

Basic Performance Soft Starters

3RW30 soft starters > Inline circuit **IE3/IE4 ready**

Selection and ordering data

For simple starting conditions



3RW ambient temperature 40 °C								Size	SD ¹⁾	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	
Rated values of three-phase motors														
Operational current I_e	Rating at operational voltage U_e			Rating at operational voltage U_e										
	230 V	400 V	500 V	200 V	230 V	460 V	575 V							
A	kW	kW	kW	hp	hp	hp	hp	d						
Rated operational voltage U_e 200 ... 480 V														
3.6	0.75	1.5	--	0.5	0.75	2	--	S00	2	3RW3013-□BB□4		1	1 unit	
6.5	1.5	3	--	1	1.5	3	--	S00	2	3RW3014-□BB□4		1	1 unit	
9	2.2	4	--	2	2	5	--	S00	2	3RW3016-□BB□4		1	1 unit	
12.5	3	5.5	--	3	3	7.5	--	S00	2	3RW3017-□BB□4		1	1 unit	
17.6	4	7.5	--	5	5	10	--	S00	2	3RW3018-□BB□4		1	1 unit	
25	5.5	11	--	7.5	7.5	15	--	S0	2	3RW3026-□BB□4		1	1 unit	
32	7.5	15	--	10	10	20	--	S0	2	3RW3027-□BB□4		1	1 unit	
38	11	18.5	--	10	10	25	--	S0	2	3RW3028-□BB□4		1	1 unit	
45	11	22	--	10	15	30	--	S2	2	3RW3036-□BB□4		1	1 unit	
63	18.5	30	--	20	20	40	--	S2	2	3RW3037-□BB□4		1	1 unit	
72	22	37	--	20	25	50	--	S2	2	3RW3038-□BB□4		1	1 unit	
80	22	45	--	25	30	60	--	S3	2	3RW3046-□BB□4		1	1 unit	
106	30	55	--	30	40	75	--	S3	2	3RW3047-□BB□4		1	1 unit	

Article No. supplement for connection types

- Screw terminals
- Spring-loaded terminals²⁾



Control supply voltage U_s

- 24 V AC/DC
- 110 ... 230 V AC/DC

Soft starters for easy starting conditions and high switching frequency, rated operational voltage U_e 200 ... 400 V, rated control supply voltage U_s 24 ... 230 V AC/DC

3	0.55	1.1	--	A	0.5	0.5	--	--	22.5 mm				
										3RW3003-1CB54	1	1 unit	
										3RW3003-2CB54	1	1 unit	

¹⁾ Soft starter U_e 200 to 480 V with screw terminals: Standard delivery time SD = 1 day (d).

²⁾ Main connection from size S2: screw terminals.

Note:

For the constraints for the motor outputs specified here, see page 7/7.







Basic Performance Soft Starters

3RW30 soft starters > Accessories

Selection and ordering data

More information

Equipment Manual "SIRIUS 3RW30/3RW40 Soft Starters", see <https://support.industry.siemens.com/cs/ww/en/view/38752095>

Conductor cross-section		Tightening torque	For soft starters size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Solid or stranded	Finely stranded with end sleeve							
mm ²	mm ²	AWG	Nm	d				
Three-phase infeed terminals								
	2.5 ... 25	2.5 ... 16	10 ... 4	3 ... 4	S00 (3RW301.), S0 (3RW302.)		1	1 unit
3RV2925-5AB								
For soft starters				SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Type	Size			d				
Auxiliary terminals								
	Auxiliary terminals, 3-pole							
3RT2946-4F	3RW304.	S3		5	3RT2946-4F		1	1 unit
Covers for soft starters								
	Terminal covers for box terminals		Additional touch protection to be fitted at the box terminals (two units required per device)					
3RT2946-4EA2	3RW303.	S2			3RT2936-4EA2		1	1 unit
	3RW304.	S3			3RT2946-4EA2		1	1 unit
	Terminal covers for cable lugs and busbar connections		For complying with the voltage clearances and as touch protection if box terminal is removed (two units required per device)					
3RT1946-4EA1	3RW304.	S3		5	3RT1946-4EA1		1	1 unit
For motor starter protectors		For soft starters	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Size	Size			d				
Mounting rails for mounting contactors for the customer assembly of 3RA21 load feeders with busbar adapters for 60 mm systems								
	--	S0	For the discrete configuration of direct-on-line starters, an additional mounting rail is needed for the contactor in addition to the existing mounting rail on the busbar adapter for the motor starter protector.					
8US1998-7CB45			For pushing onto the device adapter, including fixing screws		2	8US1998-7CB45	1	10 units
Standard mounting rail adapters								
	S2	S2	For mechanical fixing of motor starter protector and soft starter; for snapping onto standard mounting rail or for screw fixing					
3RA2932-1CA00			Single-unit packaging		2	3RA2932-1CA00	1	1 unit

Basic Performance Soft Starters

3RW30 soft starters > Accessories

For soft starters Type	Size	Motor starter protectors Size	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
------------------------	------	-------------------------------	----	-------------	--------------	-------------------	-----

Link modules to motor starter protectors¹⁾



3RA2921-1BA00

3RW301.	S00	S00	2
3RW302.	S0	S00/S0	2
3RW3036	S2	S2	▶
3RW304.	S3	S3	▶

Screw terminals		⊕
3RA2921-1BA00		1 1 unit
3RA2921-1BA00		1 1 unit
3RA2931-1AA00		1 1 unit
3RA1941-1AA00		1 1 unit



3RA2921-2GA00

3RW301.	S00	S00	2
3RW302.	S0	S0	2

Spring-loaded terminals		⊕
3RA2911-2GA00		1 1 unit
3RA2921-2GA00		1 1 unit

¹⁾ Can be used in size S0 up to 32 A.
 Can be used in size S2 up to 65 A in combination with 3RA2932-1CA00 standard mounting rail adapter (specially for soft starters).
 Can be used in size S3 only on mounting plate.

Version	Functionality Functions	Use	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
---------	-------------------------	-----	----	-------------	--------------	-------------------	-----

Covers and push-in lugs (only for 3RW3003)



3RP1902

Sealable covers	For securing against unauthorized adjustment of setting knobs	For devices with 1 or 2 CO contacts	5
------------------------	---	-------------------------------------	---

3RP1902		1 5 units
---------	--	-----------



3RP1903

Push-in lugs for screw fixing	--	For devices with 1 or 2 CO contacts	5
--------------------------------------	----	-------------------------------------	---

3RP1903		1 10 units
---------	--	------------

Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
---------	----	-------------	--------------	-------------------	-----

Tools for opening spring-loaded terminals in sizes S00 and S0




3RA2908-1A

Screwdrivers	For all SIRIUS devices with spring-loaded terminals		
	Length approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated	2	

Spring-loaded terminals		⊕
3RA2908-1A		1 1 unit

Blank labels



3RT2900-1SB20







Unit labeling plates¹⁾	For SIRIUS devices		
	20 mm x 7 mm, titanium gray	20	

3RT2900-1SB20		100 340 units
---------------	--	---------------

¹⁾ PC labeling systems for individual inscription of unit labeling plates are available from: murrplastik Systemtechnik GmbH.

Basic Performance Soft Starters

For 3RW55/3RW55 Failsafe

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fans							
 <p>3RW5983-0FF00</p>	Fan	3RW551 (1x), 3RW552 (2x), 3RW553 (2x)	--	▶	3RW5983-0FF00	1	1 unit
		3RW554 (1x)	--	▶	3RW5984-0FF00	1	1 unit
		3RW555 (3x)	--	▶	3RW5985-0FF00	1	1 unit
Terminals and terminal covers							
 <p>3RW5982-0TB00</p>	Box terminal block	3RW552 (2x)	--	▶	3RW5982-0TB00	1	1 unit
 <p>3RW5980-1TR00</p>	Removable control terminals	3RW551.-1H... (2x), 3RW552.-1H... (2x), 3RW553.-6H... (2x), 3RW554.-6H... (2x), 3RW555.-6H... (2x)	contains 2 blocks each with 6 terminals	▶	Screw terminals  3RW5980-1TR00	1	1 unit
		3RW551.-3H... (2x), 3RW552.-3H... (2x), 3RW553.-2H... (2x), 3RW554.-2H... (2x), 3RW555.-2H... (2x)	contains 2 blocks each with 6 terminals	▶	Spring-loaded terminals  3RW5980-2TR00	1	1 unit
 <p>3RW5955-0TC20</p>	Terminal cover	3RW555	--	▶	3RW5955-0TC20	1	1 unit





Basic Performance Soft Starters

For 3RW55/3RW55 Failsafe

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Enclosure components							
	Cover for control cable duct	3RW55...-HA..	Titanium gray	▶	3RW5950-0GD20	1	1 unit
3RW5950-0GD20		3RW55...-HF..	Yellow NEW	▶	3RW5950-0GD30	1	1 unit
							
3RW5950-0GD30							
	Hinged cover	3RW55	With cutout for High Feature HMI module	▶	3RW5950-0GL30	1	1 unit
3RW5950-0GL30							








Basic Performance Soft Starters

For 3RW55/3RW55 Failsafe

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
HMI modules							
	HMI module	3RW55	High Feature	▶	3RW5980-0HF00	1	1 unit
3RW5980-0HF00							
	Interface cover	3RW55	--	▶	3RW5980-0HL00	1	1 unit
3RW5980-0HL00							
Connection cable for installing the HMI module in the soft starter							
	Connection cable	--	0.1 m, flat	▶	3UF7931-0AA00-0	1	1 unit
3UF7931-0AA00-0							
Transport packaging							
	Transport packaging	3RW551	--	▶	3RW5951-0VY00	1	1 unit
		3RW552, 3RW553	--	▶	3RW5953-0VY00	1	1 unit
		3RW554	--	▶	3RW5954-0VY00	1	1 unit
		3RW555	--	▶	3RW5955-0VY00	1	1 unit
3RW5953-0VY00							



Basic Performance Soft Starters

For 3RW52

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fans							
 <p>3RW5983-0FF00</p>	Fans	3RW5216/17 (1x), 3RW5226/27 (2x), 3RW523 (2x)	--	▶	3RW5983-0FF00	1	1 unit
		3RW524 (1x)	--	▶	3RW5984-0FF00	1	1 unit
Terminals							
 <p>3RW5982-0TB00</p>	Box terminal block	3RW522 (2x)	--	▶	3RW5982-0TB00	1	1 unit
 <p>3RW5980-1TR00</p>	Removable control terminals	3RW521.-1.C., 3RW522.-1.C., 3RW523.-6.C., 3RW524.-6.C..	contains 2 blocks each with 6 terminals	▶	Screw terminals 	1	1 unit
		3RW521.-3.C., 3RW522.-3.C., 3RW523.-2.C., 3RW524.-2.C..	contains 2 blocks each with 6 terminals	▶	Spring-loaded terminals 		
Enclosure components							
 <p>3RW5953-0GB00</p>	Enclosure base	3RW522, 3RW523	--	▶	3RW5953-0GB00	1	1 unit
		3RW524	--	▶	3RW5954-0GB00	1	1 unit
 <p>3RW5950-0GD20</p>	Cover for control cable duct	3RW52	Titanium gray	▶	3RW5950-0GD20	1	1 unit







Basic Performance Soft Starters

For 3RW52

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Enclosure components							
 3RW5950-0GL20	Hinged cover	3RW52	Without cutout ▶	3RW5950-0GL20		1	1 unit
	Transport packaging						
 3RW5953-0VY00	Transport packaging	3RW521	-- ▶	3RW5951-0VY00		1	1 unit
		3RW522, 3RW523	-- ▶	3RW5953-0VY00		1	1 unit
		3RW524	-- ▶	3RW5954-0VY00		1	1 unit

Basic Performance Soft Starters

For 3RW50 **NEW**

Product designation	Manufacturer's Article No. of the soft starter	Type of product	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*
Fan							
 <p>3RW5905-0FF00</p>	Fan	3RW505 (1x)	--	▶	3RW5905-0FF00	1	1 unit
		3RW507 (1x)	--	▶	3RW5907-0FF00	1	1 unit
Terminals							
 <p>3RW5980-1TR00</p>	Removable control terminals	3RW50..-6.B..	contains 2 blocks each with 6 terminals	▶	Screw terminals  3RW5980-1TR00	1	1 unit
		3RW50..-2.B..	contains 2 blocks each with 6 terminals	▶	Spring-loaded terminals  3RW5980-2TR00	1	1 unit
Enclosure components							
 <p>3RW5900-0GL00</p>	Hinged cover	3RW50	--	▶	3RW5900-0GL00	1	1 unit
Transport packaging							
 <p>3RW5905-0VY00</p>	Transport packaging	3RW505	--	▶	3RW5905-0VY00	1	1 unit
		3RW507	--	▶	3RW5907-0VY00	1	1 unit

3RW Soft Starters

Soft starters for enclosed applications

Overview

The family of 3RW40 and 3RW44 softstarters are available in stand alone enclosed control designs for smooth starting and stopping of standard NEMA design B three phase inductive motors, thus eliminating physical stresses to the system and load while minimizing starting current. These pre-engineered enclosed designs offer convenience and flexibility in and UL/CSA certified offering. Enclosed styles are available in combination and non-combination configurations through 600HP and system voltages of 200V, 230V, 480V, and 600V.

The Class 73 offers either the 3RW40 or 3RW44 in a non-combination style offering. These non-combination styles come standard with a choice of Type 1, 3R, 12, 4 NEMA rated enclosure, a control transformer, Sirius softstarter with built-in overload and bypass, line side power terminal block, and a reset pushbutton. The enclosed offering can be powerfully matched with a wide variety of factory modified options such as pushbutton control, pilot lights, metering and other control options such as isolation contactors and emergency start bypass starters. 3RW44 enclosed styles are also available with optional through the door keypad and Profibus communication.

The Class 74 offering includes all of the features of the Class 73 in a combination style design. Standard options are either a circuit breaker or fusible disconnect providing short circuit protection and soft starting in one package.

Application

The Class 73/74 product is a fully enclosed solid state reduced voltage starter designed for a wide variety of industrial applications. The enclosed softstarter offerings are ideal for new as well as existing applications where total motor controls is required.

Proper selection based on application data is made simple following these easy steps:


- Select proper RVSS by application
 - Select the 3RW40 versus the 3RW44 using the application info provided in the open section of the catalog
- Select the rating chart for normal starting or sever duty starting
 - Normal starting is rated at 350% of rated motor current IM for 10 seconds and based on starts per hour – representative of a class 20 application.
 - Severe starting is rated at 350% of rated motor current Im for 20 seconds and based on starts per hour – representative of a Class 20 application
- Select model using Motor nameplate data
 - Identify correct motor voltage column
 - Select rate current or HP row
 - Find ordering number under desired enclosure type column (e.g. NEMA 1)
 - Select appropriate system voltage
- Select factory modification on page 6/40¹⁾

Example:
3RW44, N12, CB disconnect, 460V, 200HP with a start/stop and red run light

Order No.
74MT34BFAP A1 FC

Product Nomenclature


Class 73 and 74 Enclosed Soft Starters

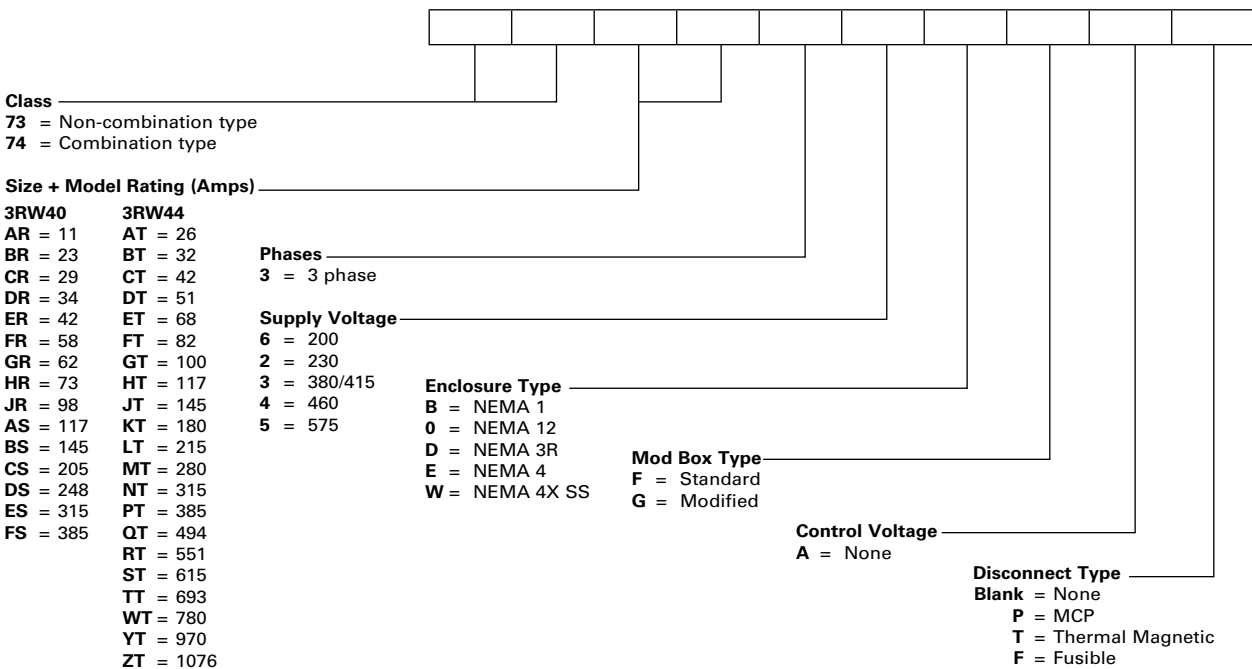

¹⁾ Some modifications will require a larger 'Modified' box than the standard box e.g. Isolation contactor, space heater, etc. See page 7/124 for instructions.

3RW Soft Starters

3RW40 Size S0-S3 Non-Combo

 <p>3RW40 Enclosed features:</p> <ul style="list-style-type: none"> Available in NEMA 1,12,3R,4, and 4 stainless steel Compact size Built-in Bypass contactor Voltage ramp up and ramp down Current limit adjustment of 125 - 550% Internal overload class 10,15,or 20 Internal self protection Fault monitoring Isolation Contactor 	<h3>Ordering Information</h3> <ul style="list-style-type: none"> Enclosed devices should be ordered by the FLA of the motor. The 3RW40 is designed for normal starting applications. For factory modifications see page 7/124. For dimensional drawings see page 7/125. <p>Class 73 non-combination starters include:</p> <ul style="list-style-type: none"> NEMA rated enclosure 3RW40 Sirius softstarter with built-in OL and bypass Control Circuit Transformer Line side power terminal block Reset button Isolation Contactor <p>Ideal applications for 3RW40 enclosed softstarters</p> <ul style="list-style-type: none"> Fans Pumps Easy starting loads starting in less than 10 seconds <p>Class 73 starters are built to UL and CSA standards</p>
--	---

3RW40 for Standard Applications

Enclosed Non-Combination (Starter Only)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * Ie for 10s) ^②									
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$
11	3	3	7.5	—	6	3RW4024-1BB14	73AR3_BFA		73AR3_DFA		73AR3_OFA		73AR3_EFA		73AR3_WFA
23	5	7.5	15	—	13	3RW4026-1BB14	73BR3_BFA		73BR3_DFA		73BR3_OFA		73BR3_EFA		73BR3_WFA
29	7.5	10	20	—	16	3RW4027-1BB14	73CR3_BFA		73CR3_DFA		73CR3_OFA		73CR3_EFA		73CR3_WFA
34	10	10	25	—	18	3RW4028-1BB14	73DR3_BFA		73DR3_DFA		73DR3_OFA		73DR3_EFA		73DR3_WFA
42	10	15	30	—	23	3RW4036-1BB14	73ER3_BFA		73ER3_DFA		73ER3_OFA		73ER3_EFA		73ER3_WFA
58	15	20	40	—	31	3RW4037-1BB14	73FR3_BFA		73FR3_DFA		73FR3_OFA		73FR3_EFA		73FR3_WFA
62	20	20	40	—	33	3RW4038-1BB14	73GR3_BFA		73GR3_DFA		73GR3_OFA		73GR3_EFA		73GR3_WFA
73	20	25	50	—	39	3RW4046-1BB14	73HR3_BFA		73HR3_DFA		73HR3_OFA		73HR3_EFA		73HR3_WFA
98	30	30	75	—	52	3RW4047-1BB14	73JR3_BFA		73JR3_DFA		73JR3_OFA		73JR3_EFA		73JR3_WFA
						200V	6		6		6		6		6
						230V	2		2		2		2		2
						380V	3		3		3		3		3
						460V	4		4		4		4		4

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. Ie = FLA rating of motor

3RW Soft Starters

Enclosed 3RW40



3RW40 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10, 15, or 20
- Internal self protection
- Fault monitoring

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications (Class 10 applications).
- ▶ For factory modifications see page 7/124.
- ▶ For dimensional drawings see page 7/125.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control circuit transformer
- Line side power terminal block
- Reset button

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 73 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Non-Combination (Starter Only)

Rated Operating Current	MAX HP ^①				kW	Class 10 Light Duty (350% * Im for 10s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
117	30	40	75	—	56	3RW4055-6BB34	73AS3_BFA		73AS3_DFA		73AS3_OFA		73AS3_EFA		73AS3_WFA	
145	40	50	100	—	75	3RW4056-6BB34	73BS3_BFA		73BS3_DFA		73BS3_OFA		73BS3_EFA		73BS3_WFA	
205	60	75	150	—	112	3RW4073-6BB34	73CS3_BFA		73CS3_DFA		73CS3_OFA		73CS3_EFA		73CS3_WFA	
248	75	100	200	—	149	3RW4074-6BB34	73DS3_BFA		73DS3_DFA		73DS3_OFA		73DS3_EFA		73DS3_WFA	
315	100	125	250	—	186	3RW4075-6BB34	73ES3_BFA		73ES3_DFA		73ES3_OFA		73ES3_EFA		73ES3_WFA	
385	125	150	300	—	224	3RW4076-6BB34	73FS3_BFA		73FS3_DFA		73FS3_OFA		73FS3_EFA		73FS3_WFA	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	
117	—	—	75	100	—	3RW4055-6BB35	73AS35BFA		73AS35DFA		73AS35OFA		73AS35EFA		73AS35WFA	
145	—	—	100	150	—	3RW4056-6BB35	73BS35BFA		73BS35DFA		73BS35OFA		73BS35EFA		73BS35WFA	
205	—	—	150	200	—	3RW4073-6BB35	73CS35BFA		73CS35DFA		73CS35OFA		73CS35EFA		73CS35WFA	
248	—	—	200	250	—	3RW4074-6BB35	73DS35BFA		73DS35DFA		73DS35OFA		73DS35EFA		73DS35WFA	
315	—	—	250	300	—	3RW4075-6BB35	73ES35BFA		73ES35DFA		73ES35OFA		73ES35EFA		73ES35WFA	
385	—	—	300	400	—	3RW4076-6BB35	73FS35BFA		73FS35DFA		73FS35OFA		73FS35EFA		73FS35WFA	

Enclosed Non-Combination (Starter Only)

Rated Operating Current	MAX HP ^①				kW	Class 20 Severe Duty (350% * Ie for 20s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
112	30	40	75	—	56	3RW4055-6BB34	73AS3_BFA		73AS3_DFA		73AS3_OFA		73AS3_EFA		73AS3_WFA	
132	40	50	100	—	75	3RW4056-6BB34	73BS3_BFA		73BS3_DFA		73BS3_OFA		73BS3_EFA		73BS3_WFA	
185	60	60	125	—	93	3RW4073-6BB34	73CS3_BFA		73CS3_DFA		73CS3_OFA		73CS3_EFA		73CS3_WFA	
205	60	75	150	—	112	3RW4074-6BB34	73DS3_BFA		73DS3_DFA		73DS3_OFA		73DS3_EFA		73DS3_WFA	
280	75	100	200	—	149	3RW4075-6BB34	73ES3_BFA		73ES3_DFA		73ES3_OFA		73ES3_EFA		73ES3_WFA	
340	100	125	250	—	186	3RW4076-6BB34	73FS3_BFA		73FS3_DFA		73FS3_OFA		73FS3_EFA		73FS3_WFA	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	
112	—	—	75	75	—	3RW4055-6BB35	73AS35BFA		73AS35DFA		73AS35OFA		73AS35EFA		73AS35WFA	
132	—	—	100	125	—	3RW4056-6BB35	73BS35BFA		73BS35DFA		73BS35OFA		73BS35EFA		73BS35WFA	
185	—	—	125	150	—	3RW4073-6BB35	73CS35BFA		73CS35DFA		73CS35OFA		73CS35EFA		73CS35WFA	
205	—	—	150	200	—	3RW4074-6BB35	73DS35BFA		73DS35DFA		73DS35OFA		73DS35EFA		73DS35WFA	
280	—	—	200	250	—	3RW4075-6BB35	73ES35BFA		73ES35DFA		73ES35OFA		73ES35EFA		73ES35WFA	
340	—	—	250	300	—	3RW4076-6BB35	73FS35BFA		73FS35DFA		73FS35OFA		73FS35EFA		73FS35WFA	


① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor.

HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

3RW Soft Starters

3RW40 – Size S0-S3 Circuit Breaker

 <p>3RW40 Enclosed features:</p> <ul style="list-style-type: none"> Available in NEMA 1, 12, 3R, 4, and 4 stainless steel Compact size Built-in Bypass contactor Voltage ramp up and ramp down Current limit adjustment of 125 - 550% Internal overload class 10, 15, or 20 Internal self protection Fault monitoring Isolation Contactor 	<h3>Ordering Information</h3> <ul style="list-style-type: none"> Enclosed devices should be ordered by the FLA of the motor. The 3RW40 is designed for normal starting applications. For factory modifications see page 7/124. For dimensional drawings see page 7/125. <p>Class 74 non-combination starters include:</p> <ul style="list-style-type: none"> NEMA rated enclosure Circuit Breaker disconnect with shunt trip 3RW40 Sirius softstarter with built-in OL and bypass Control Circuit Transformer Isolation Contactor 		<p>Ideal applications for 3RW40 enclosed softstarters</p> <ul style="list-style-type: none"> Fans Pumps Easy starting loads starting in less than 10 seconds <p>Class 74 starters are built to UL and CSA standards</p>

3RW40 for Standard Applications

Enclosed Circuit Breaker Combination (Starter With Circuit Breaker Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * Ie for 10s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
11	3	3	7.5	—	6	3RW4024-1BB14	74AR3_BFAP		74AR3_DFAP		74AR3_OFAP		74AR3_EFAP		74AR3_WFAP	
23	5	7.5	15	—	13	3RW4026-1BB14	74BR3_BFAP		74BR3_DFAP		74BR3_OFAP		74BR3_EFAP		74BR3_WFAP	
29	7.5	10	20	—	16	3RW4027-1BB14	74CR3_BFAP		74CR3_DFAP		74CR3_OFAP		74CR3_EFAP		74CR3_WFAP	
34	10	10	25	—	18	3RW4028-1BB14	74DR3_BFAP		74DR3_DFAP		74DR3_OFAP		74DR3_EFAP		74DR3_WFAP	
42	10	15	30	—	23	3RW4036-1BB14	74ER3_BFAP		74ER3_DFAP		74ER3_OFAP		74ER3_EFAP		74ER3_WFAP	
58	15	20	40	—	31	3RW4037-1BB14	74FR3_BFAP		74FR3_DFAP		74FR3_OFAP		74FR3_EFAP		74FR3_WFAP	
62	20	20	40	—	33	3RW4038-1BB14	74GR3_BFAP		74GR3_DFAP		74GR3_OFAP		74GR3_EFAP		74GR3_WFAP	
73	20	25	50	—	39	3RW4046-1BB14	74HR3_BFAP		74HR3_DFAP		74HR3_OFAP		74HR3_EFAP		74HR3_WFAP	
98	30	30	75	—	52	3RW4047-1BB14	74JR3_BFAP		74JR3_DFAP		74JR3_OFAP		74JR3_EFAP		74JR3_WFAP	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. Ie = FLA rating of motor

Enclosed 3RW44



3RW40 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Voltage ramp up and ramp down
- Current limit adjustment of 125 - 550%
- Internal overload class 10, 15, or 20
- Internal self protection
- Fault monitoring

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW40 is designed for normal starting applications (Class 10 applications).
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.

- Class 74 non-combination starters include:
- NEMA rated enclosure
 - Circuit breaker disconnect with shunt trip
 - 3RW40 Sirius softstarter with built-in OL and bypass
 - Control circuit transformer

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Circuit Breaker Combination (Starter with Circuit Breaker Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * I _m for 10s) ^②											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
117	30	40	75	—	56	3RW4055-6BB34	74AS3_BFAP		74AS3_DFAP		74AS3_OFAP		74AS3_EFAP		74AS3_WFAP		
145	40	50	100	—	75	3RW4056-6BB34	74BS3_BFAP		74BS3_DFAP		74BS3_OFAP		74BS3_EFAP		74BS3_WFAP		
205	60	75	150	—	112	3RW4073-6BB34	74CS3_BFAP		74CS3_DFAP		74CS3_OFAP		74CS3_EFAP				
248	75	100	200	—	149	3RW4074-6BB34	74DS3_BFAP		74DS3_DFAP		74DS3_OFAP		74DS3_EFAP				
315	100	125	250	—	186	3RW4075-6BB34	74ES3_BFAP		74ES3_DFAP		74ES3_OFAP		74ES3_EFAP				
385	125	150	300	—	224	3RW4076-6BB34	74FS3_BFAP		74FS3_DFAP		74FS3_OFAP		74FS3_EFAP				
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
117	—	—	75	100	—	3RW4055-6BB35	74AS35BFAP		74AS35DFAP		74AS350FAP		74AS35EFAP		74AS35WFAP		
145	—	—	100	150	—	3RW4056-6BB35	74BS35BFAP		74BS35DFAP		74BS350FAP		74BS35EFAP		74BS35WFAP		
205	—	—	150	200	—	3RW4073-6BB35	74CS35BFAP		74CS35DFAP		74CS350FAP		74CS35EFAP				
248	—	—	200	250	—	3RW4074-6BB35	74DS35BFAP		74DS35DFAP		74DS350FAP		74DS35EFAP				
315	—	—	250	300	—	3RW4075-6BB35	74ES35BFAP		74ES35DFAP		74ES350FAP		74ES35EFAP				
385	—	—	300	400	—	3RW4076-6BB35	74FS35BFAP		74FS35DFAP		74FS350FAP		74FS35EFAP				

Enclosed Circuit Breaker Combination (Starter with Circuit Breaker Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 20 Severe Duty (350% * I _e for 20s) ^②											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
112	30	40	75	—	56	3RW4055-6BB34	74AS3_BFAP		74AS3_DFAP		74AS3_OFAP		74AS3_EFAP		74AS3_WFAP		
132	40	50	100	—	75	3RW4056-6BB34	74BS3_BFAP		74BS3_DFAP		74BS3_OFAP		74BS3_EFAP		74BS3_WFAP		
185	60	60	125	—	93	3RW4073-6BB34	74CS3_BFAP		74CS3_DFAP		74CS3_OFAP		74CS3_EFAP				
205	60	75	150	—	112	3RW4074-6BB34	74DS3_BFAP		74DS3_DFAP		74DS3_OFAP		74DS3_EFAP				
280	75	100	200	—	149	3RW4075-6BB34	74ES3_BFAP		74ES3_DFAP		74ES3_OFAP		74ES3_EFAP				
340	100	125	250	—	186	3RW4076-6BB34	74FS3_BFAP		74FS3_DFAP		74FS3_OFAP		74FS3_EFAP				
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
112	—	—	75	75	—	3RW4055-6BB35	74AS35BFAP		74AS35DFAP		74AS350FAP		74AS35EFAP		74AS35WFAP		
132	—	—	100	125	—	3RW4056-6BB35	74BS35BFAP		74BS35DFAP		74BS350FAP		74BS35EFAP		74BS35WFAP		
185	—	—	125	150	—	3RW4073-6BB35	74CS35BFAP		74CS35DFAP		74CS350FAP		74CS35EFAP				
205	—	—	150	200	—	3RW4074-6BB35	74DS35BFAP		74DS35DFAP		74DS350FAP		74DS35EFAP				
280	—	—	200	250	—	3RW4075-6BB35	74ES35BFAP		74ES35DFAP		74ES350FAP		74ES35EFAP				
340	—	—	250	300	—	3RW4076-6BB35	74FS35BFAP		74FS35DFAP		74FS350FAP		74FS35EFAP				

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. I_m = FLA rating of motor.

3RW Soft Starters

3RW40 – Size S0-S3 Fusible



- 3RW40 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in Bypass contactor
 - Voltage ramp up and ramp down
 - Current limit adjustment of 125 - 550%
 - Internal overload class 10,15,or 20
 - Internal self protection
 - Fault monitoring
 - Isolation Contactor

Ordering Information

- ▶ Enclosed devices should be ordered by the FLA of the motor.
- ▶ The 3RW40 is designed for normal starting applications.
- ▶ For factory modifications see page 7/124.
- ▶ For dimensional drawings see page 7/125.

Class 73 non-combination starters include:

- NEMA rated enclosure
- Fusible Disconnect
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control Circuit Transformer
- Isolation Contactor

Ideal applications for 3RW40 enclosed softstarters

- Fans
- Pumps
- Easy starting loads starting in less than 10 seconds

Class 74 starters are built to UL and CSA standards

3RW40 for Standard Applications

Enclosed Fusible Combination (Starter With Fusible Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * I _e for 10s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
11	3	3	7.5	—	6	3RW4024-1BB14	74AR3_BFAF		74AR3_DFAF		74AR3_OFAF		74AR3_EFAF		74AR3_WFAF	
23	5	7.5	15	—	13	3RW4026-1BB14	74BR3_BFAF		74BR3_DFAF		74BR3_OFAF		74BR3_EFAF		74BR3_WFAF	
29	7.5	10	20	—	16	3RW4027-1BB14	74CR3_BFAF		74CR3_DFAF		74CR3_OFAF		74CR3_EFAF		74CR3_WFAF	
34	10	10	25	—	18	3RW4028-1BB14	74DR3_BFAF		74DR3_DFAF		74DR3_OFAF		74DR3_EFAF		74DR3_WFAF	
42	10	15	30	—	23	3RW4036-1BB14	74ER3_BFAF		74ER3_DFAF		74ER3_OFAF		74ER3_EFAF		74ER3_WFAF	
58	15	20	40	—	31	3RW4037-1BB14	74FR3_BFAF		74FR3_DFAF		74FR3_OFAF		74FR3_EFAF		74FR3_WFAF	
62	20	20	40	—	33	3RW4038-1BB14	74GR3_BFAF		74GR3_DFAF		74GR3_OFAF		74GR3_EFAF		74GR3_WFAF	
73	20	25	50	—	39	3RW4046-1BB14	74HR3_BFAF		74HR3_DFAF		74HR3_OFAF		74HR3_EFAF		74HR3_WFAF	
98	30	30	75	—	52	3RW4047-1BB14	74JR3_BFAF		74JR3_DFAF		74JR3_OFAF		74JR3_EFAF		74JR3_WFAF	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C

② Starter selection is dependent on type of application. I_e = FLA rating of motor

Enclosed 3RW44



- 3RW40 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in bypass contactor
 - Voltage ramp up and ramp down
 - Current limit adjustment of 125 - 550%
 - Internal overload class 10, 15, or 20
 - Internal self protection
 - Fault monitoring

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW40 is designed for normal starting applications (Class 10 applications).
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.

Class 74 combination starters include:

- NEMA rated enclosure
- Fusible disconnect
- 3RW40 Sirius softstarter with built-in OL and bypass
- Control circuit transformer

Ideal applications for 3RW40 enclosed softstarters:

- Fans
- Pumps
- Building/construction machines
- Presses
- Escalators
- Transport systems
- Air conditioning systems
- Ventilators
- Assembly lines

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW40 for Standard Applications

Enclosed Fusible Combination (Starter with Fusible Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * Im for 10s) ^②											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
117	30	40	75	—	56	3RW4055-6BB34	74AS3_BFAF		74AS3_DFAF		74AS3_0FAF		74AS3_EFAF		74AS3_WFAF		
145	40	50	100	—	75	3RW4056-6BB34	74BS3_BFAF		74BS3_DFAF		74BS3_0FAF		74BS3_EFAF		74BS3_WFAF		
205	60	75	150	—	112	3RW4073-6BB34	74CS3_BFAF		74CS3_DFAF		74CS3_0FAF		74CS3_EFAF				
248	75	100	200	—	149	3RW4074-6BB34	74DS3_BFAF		74DS3_DFAF		74DS3_0FAF		74DS3_EFAF				
315	100	125	250	—	186	3RW4075-6BB34	74ES3_BFAF		74ES3_DFAF		74ES3_0FAF		74ES3_EFAF				
385	125	150	300	—	224	3RW4076-6BB34	74FS3_BFAF		74FS3_DFAF		74FS3_0FAF		74FS3_EFAF				
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
117	—	—	75	100	—	3RW4055-6BB35	74AS35BFAF		74AS35DFAF		74AS350FAF		74AS35EFAF		74AS35WFAF		
145	—	—	100	150	—	3RW4056-6BB35	74BS35BFAF		74BS35DFAF		74BS350FAF		74BS35EFAF		74BS35WFAF		
205	—	—	150	200	—	3RW4073-6BB35	74CS35BFAF		74CS35DFAF		74CS350FAF		74CS35EFAF				
248	—	—	200	250	—	3RW4074-6BB35	74DS35BFAF		74DS35DFAF		74DS350FAF		74DS35EFAF				
315	—	—	250	300	—	3RW4075-6BB35	74ES35BFAF		74ES35DFAF		74ES350FAF		74ES35EFAF				
385	—	—	300	400	—	3RW4076-6BB35	74FS35BFAF		74FS35DFAF		74FS350FAF		74FS35EFAF				

Enclosed Fusible Combination (Starter with Fusible Disconnect)

Rated Operating Current	MAX HP ^①				KW	Class 20 Severe Duty (350% * Ie for 20s) ^②											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
112	30	40	75	—	56	3RW4055-6BB34	74AS3_BFAF		74AS3_DFAF		74AS3_0FAF		74AS3_EFAF		74AS3_WFAF		
132	40	50	100	—	75	3RW4056-6BB34	74BS3_BFAF		74BS3_DFAF		74BS3_0FAF		74BS3_EFAF		74BS3_WFAF		
185	60	60	125	—	93	3RW4073-6BB34	74CS3_BFAF		74CS3_DFAF		74CS3_0FAF		74CS3_EFAF				
205	60	75	150	—	112	3RW4074-6BB34	74DS3_BFAF		74DS3_DFAF		74DS3_0FAF		74DS3_EFAF				
280	75	100	200	—	149	3RW4075-6BB34	74ES3_BFAF		74ES3_DFAF		74ES3_0FAF		74ES3_EFAF				
340	100	125	250	—	186	3RW4076-6BB34	74FS3_BFAF		74FS3_DFAF		74FS3_0FAF		74FS3_EFAF				
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
112	—	—	75	75	—	3RW4055-6BB35	74AS35BFAF		74AS35DFAF		74AS350FAF		74AS35EFAF		74AS35WFAF		
132	—	—	100	125	—	3RW4056-6BB35	74BS35BFAF		74BS35DFAF		74BS350FAF		74BS35EFAF		74BS35WFAF		
185	—	—	125	150	—	3RW4073-6BB35	74CS35BFAF		74CS35DFAF		74CS350FAF		74CS35EFAF				
205	—	—	150	200	—	3RW4074-6BB35	74DS35BFAF		74DS35DFAF		74DS350FAF		74DS35EFAF				
280	—	—	200	250	—	3RW4075-6BB35	74ES35BFAF		74ES35DFAF		74ES350FAF		74ES35EFAF				
340	—	—	250	300	—	3RW4076-6BB35	74FS35BFAF		74FS35DFAF		74FS350FAF		74FS35EFAF				

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.

Class 73 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 73 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Non-Combination (Starter Only)

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * Im for 10s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
26	7.5	7.5	15	—	12	3RW4422-1BC34	73AT3_BFA		73AT3_DFA		73AT3_OFA		73AT3_EFA		73AT3_WFA	
32	10	10	20	—	15	3RW4423-1BC34	73BT3_BFA		73BT3_DFA		73BT3_OFA		73BT3_EFA		73BT3_WFA	
42	10	15	25	—	19	3RW4424-1BC34	73CT3_BFA		73CT3_DFA		73CT3_OFA		73CT3_EFA		73CT3_WFA	
51	15	15	30	—	22	3RW4425-1BC34	73DT3_BFA		73DT3_DFA		73DT3_OFA		73DT3_EFA		73DT3_WFA	
68	20	25	50	—	37	3RW4426-1BC34	73ET3_BFA		73ET3_DFA		73ET3_OFA		73ET3_EFA		73ET3_WFA	
82	25	30	60	—	45	3RW4427-1BC34	73FT3_BFA		73FT3_DFA		73FT3_OFA		73FT3_EFA		73FT3_WFA	
100	30	30	75	—	56	3RW4434-6BC34	73GT3_BFA		73GT3_DFA		73GT3_OFA		73GT3_EFA		73GT3_WFA	
117	30	40	75	—	56	3RW4435-6BC34	73HT3_BFA		73HT3_DFA		73HT3_OFA		73HT3_EFA		73HT3_WFA	
145	40	50	100	—	75	3RW4436-6BC34	73JT3_BFA		73JT3_DFA		73JT3_OFA		73JT3_EFA		73JT3_WFA	
180	60	60	125	—	93	3RW4443-6BC34	73KT3_BFA		73KT3_DFA		73KT3_OFA		73KT3_EFA		73KT3_WFA	
215	60	75	150	—	112	3RW4444-6BC34	73LT3_BFA		73LT3_DFA		73LT3_OFA		73LT3_EFA		73LT3_WFA	
280	75	100	200	—	149	3RW4445-6BC34	73MT3_BFA		73MT3_DFA		73MT3_OFA		73MT3_EFA		73MT3_WFA	
315	100	125	250	—	186	3RW4446-6BC34	73NT3_BFA		73NT3_DFA		73NT3_OFA		73NT3_EFA		73NT3_WFA	
385	125	150	300	—	224	3RW4447-6BC34	73PT3_BFA		73PT3_DFA		73PT3_OFA		73PT3_EFA		73PT3_WFA	
494	150	200	400	—	298	3RW4453-6BC34	73QT3_BFA		73QT3_DFA		73QT3_OFA		73QT3_EFA		73QT3_WFA	
551	150	200	450	—	336	3RW4454-6BC34	73RT3_BFA		73RT3_DFA		73RT3_OFA		73RT3_EFA		73RT3_WFA	
615	200	250	500	—	373	3RW4455-6BC34	73ST3_BFA		73ST3_DFA		73ST3_OFA		73ST3_EFA		73ST3_WFA	
693	200	250	550	—	410	3RW4456-6BC34	73TT3_BFA		73TT3_DFA		73TT3_OFA		73TT3_EFA		73TT3_WFA	
780	200	250	600	—	447	3RW4457-6BC34	73WT3_BFA		73WT3_DFA		73WT3_OFA		73WT3_EFA		73WT3_WFA	
970	350	350	800	—	597	3RW4465-6BC34	73YT3_BFA		73YT3_DFA		73YT3_OFA		73YT3_EFA		73YT3_WFA	
1076	350	400	900	—	972	3RW4466-6BC34	73ZT3_BFA		73ZT3_DFA		73ZT3_OFA		73ZT3_EFA		73ZT3_WFA	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	
26	—	—	15	20	—	3RW4422-1BC35	73AT35BFA		73AT35DFA		73AT35OFA		73AT35EFA		73AT35WFA	
32	—	—	20	25	—	3RW4423-1BC35	73BT35BFA		73BT35DFA		73BT35OFA		73BT35EFA		73BT35WFA	
42	—	—	25	30	—	3RW4424-1BC35	73CT35BFA		73CT35DFA		73CT35OFA		73CT35EFA		73CT35WFA	
51	—	—	30	40	—	3RW4425-1BC35	73DT35BFA		73DT35DFA		73DT35OFA		73DT35EFA		73DT35WFA	
68	—	—	50	50	—	3RW4426-1BC35	73ET35BFA		73ET35DFA		73ET35OFA		73ET35EFA		73ET35WFA	
82	—	—	60	75	—	3RW4427-1BC35	73FT35BFA		73FT35DFA		73FT35OFA		73FT35EFA		73FT35WFA	
100	—	—	75	75	—	3RW4434-6BC35	73GT35BFA		73GT35DFA		73GT35OFA		73GT35EFA		73GT35WFA	
117	—	—	75	100	—	3RW4435-6BC35	73HT35BFA		73HT35DFA		73HT35OFA		73HT35EFA		73HT35WFA	
145	—	—	100	125	—	3RW4436-6BC35	73JT35BFA		73JT35DFA		73JT35OFA		73JT35EFA		73JT35WFA	
180	—	—	125	150	—	3RW4443-6BC35	73KT35BFA		73KT35DFA		73KT35OFA		73KT35EFA		73KT35WFA	
215	—	—	150	200	—	3RW4444-6BC35	73LT35BFA		73LT35DFA		73LT35OFA		73LT35EFA		73LT35WFA	
280	—	—	200	250	—	3RW4445-6BC35	73MT35BFA		73MT35DFA		73MT35OFA		73MT35EFA		73MT35WFA	
315	—	—	250	300	—	3RW4446-6BC35	73NT35BFA		73NT35DFA		73NT35OFA		73NT35EFA		73NT35WFA	
385	—	—	300	400	—	3RW4447-6BC35	73PT35BFA		73PT35DFA		73PT35OFA		73PT35EFA		73PT35WFA	
494	—	—	400	500	—	3RW4453-6BC35	73QT35BFA		73QT35DFA		73QT35OFA		73QT35EFA		73QT35WFA	
551	—	—	450	600	—	3RW4454-6BC35	73RT35BFA		73RT35DFA		73RT35OFA		73RT35EFA		73RT35WFA	
615	—	—	500	700	—	3RW4455-6BC35	73ST35BFA		73ST35DFA		73ST35OFA		73ST35EFA		73ST35WFA	
693	—	—	550	750	—	3RW4456-6BC35	73TT35BFA		73TT35DFA		73TT35OFA		73TT35EFA		73TT35WFA	
780	—	—	600	850	—	3RW4457-6BC35	73WT35BFA		73WT35DFA		73WT35OFA		73WT35EFA		73WT35WFA	
970	—	—	800	1000	—	3RW4465-6BC35	73YT35BFA		73YT35DFA		73YT35OFA		73YT35EFA		73YT35WFA	
1076	—	—	900	1100	—	3RW4466-6BC35	73ZT35BFA		73ZT35DFA		73ZT35OFA		73ZT35EFA		73ZT35WFA	

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



- 3RW44 Enclosed features:
- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
 - Compact size
 - Built-in bypass contactor
 - Multiple starting/stopping techniques including torque control
 - Internal overload class 10, 15, or 20
 - Built-in graphical LCD keypad
 - Internal self protection
 - Fault monitoring
 - 3 parameter sets
 - Communication capable via opt. Profibus module
 - Programmable inputs and outputs
 - External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
 - The 3RW44 is designed for normal starting applications.
 - For factory modifications see page 7/124.
 - For dimensional drawings see page 7/125.
- Class 73 non-combination starters include:
- NEMA rated enclosure
 - 3RW44 Sirius softstarter with built-in OL and bypass
 - Control circuit transformer
 - Line side power terminal block
 - Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 73 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Non-Combination (Starter Only)

Rated Operating Current	MAX HP ^①				KW	Class 20 Severe Duty (350% * Im for 20s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
26	7.5	7.5	15	—	12	3RW4422-1BC34	73AT3_BFA		73AT3_DFA		73AT3_OFA		73AT3_EFA		73AT3_WFA	
32	10	10	20	—	15	3RW4423-1BC34	73BT3_BFA		73BT3_DFA		73BT3_OFA		73BT3_EFA		73BT3_WFA	
42	10	15	25	—	19	3RW4424-1BC34	73CT3_BFA		73CT3_DFA		73CT3_OFA		73CT3_EFA		73CT3_WFA	
51	15	15	30	—	22	3RW4425-1BC34	73DT3_BFA		73DT3_DFA		73DT3_OFA		73DT3_EFA		73DT3_WFA	
68	20	25	50	—	37	3RW4426-1BC34	73ET3_BFA		73ET3_DFA		73ET3_OFA		73ET3_EFA		73ET3_WFA	
82	25	30	60	—	45	3RW4427-1BC34	73FT3_BFA		73FT3_DFA		73FT3_OFA		73FT3_EFA		73FT3_WFA	
97	30	30	60	—	45	3RW4434-6BC34	73GT3_BFA		73GT3_DFA		73GT3_OFA		73GT3_EFA		73GT3_WFA	
113	30	40	75	—	56	3RW4435-6BC34	73HT3_BFA		73HT3_DFA		73HT3_OFA		73HT3_EFA		73HT3_WFA	
134	40	50	75	—	56	3RW4436-6BC34	73JT3_BFA		73JT3_DFA		73JT3_OFA		73JT3_EFA		73JT3_WFA	
175	50	60	100	—	75	3RW4443-6BC34	73KT3_BFA		73KT3_DFA		73KT3_OFA		73KT3_EFA		73KT3_WFA	
195	60	75	125	—	93	3RW4444-6BC34	73LT3_BFA		73LT3_DFA		73LT3_OFA		73LT3_EFA		73LT3_WFA	
243	75	75	150	—	112	3RW4445-6BC34	73MT3_BFA		73MT3_DFA		73MT3_OFA		73MT3_EFA		73MT3_WFA	
263	75	100	200	—	149	3RW4446-6BC34	73NT3_BFA		73NT3_DFA		73NT3_OFA		73NT3_EFA		73NT3_WFA	
326	100	125	250	—	186	3RW4447-6BC34	73PT3_BFA		73PT3_DFA		73PT3_OFA		73PT3_EFA		73PT3_WFA	
494	150	150	400	—	224	3RW4453-6BC34	73QT3_BFA		73QT3_DFA		73QT3_OFA		73QT3_EFA		73QT3_WFA	
551	150	200	450	—	298	3RW4454-6BC34	73RT3_BFA		73RT3_DFA		73RT3_OFA		73RT3_EFA		73RT3_WFA	
615	200	200	500	—	336	3RW4455-6BC34	73ST3_BFA		73ST3_DFA		73ST3_OFA		73ST3_EFA		73ST3_WFA	
634	200	250	500	—	373	3RW4456-6BC34	73TT3_BFA		73TT3_DFA		73TT3_OFA		73TT3_EFA		73TT3_WFA	
650	200	250	550	—	410	3RW4457-6BC34	73WT3_BFA		73WT3_DFA		73WT3_OFA		73WT3_EFA		73WT3_WFA	
880	300	350	700	—	522	3RW4465-6BC34	73YT3_BFA		73YT3_DFA		73YT3_OFA		73YT3_EFA		73YT3_WFA	
940	300	350	750	—	559	3RW4466-6BC34	73ZT3_BFA		73ZT3_DFA		73ZT3_OFA		73ZT3_EFA		73ZT3_WFA	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	
26	—	—	15	20	—	3RW4422-1BC35	73AT35BFA		73AT35DFA		73AT35OFA		73AT35EFA		73AT35WFA	
32	—	—	20	25	—	3RW4423-1BC35	73BT35BFA		73BT35DFA		73BT35OFA		73BT35EFA		73BT35WFA	
42	—	—	25	30	—	3RW4424-1BC35	73CT35BFA		73CT35DFA		73CT35OFA		73CT35EFA		73CT35WFA	
51	—	—	30	40	—	3RW4425-1BC35	73DT35BFA		73DT35DFA		73DT35OFA		73DT35EFA		73DT35WFA	
68	—	—	50	50	—	3RW4426-1BC35	73ET35BFA		73ET35DFA		73ET35OFA		73ET35EFA		73ET35WFA	
82	—	—	60	75	—	3RW4427-1BC35	73FT35BFA		73FT35DFA		73FT35OFA		73FT35EFA		73FT35WFA	
97	—	—	60	75	—	3RW4434-6BC35	73GT35BFA		73GT35DFA		73GT35OFA		73GT35EFA		73GT35WFA	
113	—	—	75	100	—	3RW4435-6BC35	73HT35BFA		73HT35DFA		73HT35OFA		73HT35EFA		73HT35WFA	
134	—	—	75	125	—	3RW4436-6BC35	73JT35BFA		73JT35DFA		73JT35OFA		73JT35EFA		73JT35WFA	
175	—	—	100	150	—	3RW4443-6BC35	73KT35BFA		73KT35DFA		73KT35OFA		73KT35EFA		73KT35WFA	
195	—	—	125	200	—	3RW4444-6BC35	73LT35BFA		73LT35DFA		73LT35OFA		73LT35EFA		73LT35WFA	
243	—	—	150	200	—	3RW4445-6BC35	73MT35BFA		73MT35DFA		73MT35OFA		73MT35EFA		73MT35WFA	
263	—	—	200	250	—	3RW4446-6BC35	73NT35BFA		73NT35DFA		73NT35OFA		73NT35EFA		73NT35WFA	
326	—	—	250	300	—	3RW4447-6BC35	73PT35BFA		73PT35DFA		73PT35OFA		73PT35EFA		73PT35WFA	
494	—	—	400	500	—	3RW4453-6BC35	73QT35BFA		73QT35DFA		73QT35OFA		73QT35EFA		73QT35WFA	
551	—	—	450	550	—	3RW4454-6BC35	73RT35BFA		73RT35DFA		73RT35OFA		73RT35EFA		73RT35WFA	
615	—	—	500	600	—	3RW4455-6BC35	73ST35BFA		73ST35DFA		73ST35OFA		73ST35EFA		73ST35WFA	
693	—	—	500	650	—	3RW4456-6BC35	73TT35BFA		73TT35DFA		73TT35OFA		73TT35EFA		73TT35WFA	
780	—	—	550	700	—	3RW4457-6BC35	73WT35BFA		73WT35DFA		73WT35OFA		73WT35EFA		73WT35WFA	
880	—	—	700	850	—	3RW4465-6BC35	73YT35BFA		73YT35DFA		73YT35OFA		73YT35EFA		73YT35WFA	
940	—	—	750	900	—	3RW4466-6BC35	73ZT35BFA		73ZT35DFA		73ZT35OFA		73ZT35EFA		73ZT35WFA	

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.
- For stocked versions see page 7/89.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Circuit breaker with disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Combination with Circuit Breaker Disconnect

Rated Operating Current	MAX HP ^①				KW	Class 10 Light Duty (350% * Im for 10s) ^②											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
26	7.5	7.5	15	—	12	3RW4422-1BC34	74AT3_BFAP		74AT3_DFAP		74AT3_OFAP		74AT3_EFAP		74AT3_WFAP		
32	10	10	20	—	15	3RW4423-1BC34	74BT3_BFAP		74BT3_DFAP		74BT3_OFAP		74BT3_EFAP		74BT3_WFAP		
42	10	15	25	—	19	3RW4424-1BC34	74CT3_BFAP		74CT3_DFAP		74CT3_OFAP		74CT3_EFAP		74CT3_WFAP		
51	15	15	30	—	22	3RW4425-1BC34	74DT3_BFAP		74DT3_DFAP		74DT3_OFAP		74DT3_EFAP		74DT3_WFAP		
68	20	25	50	—	37	3RW4426-1BC34	74ET3_BFAP		74ET3_DFAP		74ET3_OFAP		74ET3_EFAP		74ET3_WFAP		
82	25	30	60	—	45	3RW4427-1BC34	74FT3_BFAP		74FT3_DFAP		74FT3_OFAP		74FT3_EFAP		74FT3_WFAP		
100	30	30	75	—	56	3RW4434-6BC34	74GT3_BFAP		74GT3_DFAP		74GT3_OFAP		74GT3_EFAP		74GT3_WFAP		
117	30	40	75	—	56	3RW4435-6BC34	74HT3_BFAP		74HT3_DFAP		74HT3_OFAP		74HT3_EFAP		74HT3_WFAP		
145	40	50	100	—	75	3RW4436-6BC34	74JT3_BFAP		74JT3_DFAP		74JT3_OFAP		74JT3_EFAP		74JT3_WFAP		
180	60	60	125	—	93	3RW4443-6BC34	74KT3_BFAP		74KT3_DFAP		74KT3_OFAP		74KT3_EFAP		74KT3_WFAP		
215	60	75	150	—	112	3RW4444-6BC34	74LT3_BFAP		74LT3_DFAP		74LT3_OFAP		74LT3_EFAP		74LT3_WFAP		
280	75	100	200	—	149	3RW4445-6BC34	74MT3_BFAP		74MT3_DFAP		74MT3_OFAP		74MT3_EFAP		74MT3_WFAP		
315	100	125	250	—	186	3RW4446-6BC34	74NT3_BFAP		74NT3_DFAP		74NT3_OFAP		74NT3_EFAP		74NT3_WFAP		
385	125	150	300	—	224	3RW4447-6BC34	74PT3_BFAP		74PT3_DFAP		74PT3_OFAP		74PT3_EFAP		74PT3_WFAP		
494	150	200	400	—	298	3RW4453-6BC34	74QT3_BFAT		74QT3_DFAT		74QT3_OFAT		74QT3_EFAT		74QT3_WFAT		
551	150	200	450	—	336	3RW4454-6BC34	74RT3_BFAT		74RT3_DFAT		74RT3_OFAT		74RT3_EFAT		74RT3_WFAT		
615	200	250	500	—	373	3RW4455-6BC34	74ST3_BFAT		74ST3_DFAT		74ST3_OFAT		74ST3_EFAT		74ST3_WFAT		
693	200	250	550	—	410	3RW4456-6BC34	74TT3_BFAT		74TT3_DFAT		74TT3_OFAT		74TT3_EFAT		74TT3_WFAT		
780	200	250	600	—	447	3RW4457-6BC34	74WT3_BFAT		74WT3_DFAT		74WT3_OFAT		74WT3_EFAT		74WT3_WFAT		
970	350	350	800	—	597	3RW4465-6BC34	74YT3_BFAT		74YT3_DFAT		74YT3_OFAT		74YT3_EFAT		74YT3_WFAT		
1076	350	400	900	—	672	3RW4466-6BC34	74ZT3_BFAT		74ZT3_DFAT		74ZT3_OFAT		74ZT3_EFAT		74ZT3_WFAT		
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
26	—	—	15	20	—	3RW4422-1BC35	74AT35BFAP		74AT35DFAP		74AT35OFAP		74AT35EFAP		74AT35WFAP		
32	—	—	20	25	—	3RW4423-1BC35	74BT35BFAP		74BT35DFAP		74BT35OFAP		74BT35EFAP		74BT35WFAP		
42	—	—	25	30	—	3RW4424-1BC35	74CT35BFAP		74CT35DFAP		74CT35OFAP		74CT35EFAP		74CT35WFAP		
51	—	—	30	40	—	3RW4425-1BC35	74DT35BFAP		74DT35DFAP		74DT35OFAP		74DT35EFAP		74DT35WFAP		
68	—	—	50	50	—	3RW4426-1BC35	74ET35BFAP		74ET35DFAP		74ET35OFAP		74ET35EFAP		74ET35WFAP		
82	—	—	60	75	—	3RW4427-1BC35	74FT35BFAP		74FT35DFAP		74FT35OFAP		74FT35EFAP		74FT35WFAP		
100	—	—	75	75	—	3RW4434-6BC35	74GT35BFAP		74GT35DFAP		74GT35OFAP		74GT35EFAP		74GT35WFAP		
117	—	—	75	100	—	3RW4435-6BC35	74HT35BFAP		74HT35DFAP		74HT35OFAP		74HT35EFAP		74HT35WFAP		
145	—	—	100	125	—	3RW4436-6BC35	74JT35BFAP		74JT35DFAP		74JT35OFAP		74JT35EFAP		74JT35WFAP		
180	—	—	125	150	—	3RW4443-6BC35	74KT35BFAP		74KT35DFAP		74KT35OFAP		74KT35EFAP		74KT35WFAP		
215	—	—	150	200	—	3RW4444-6BC35	74LT35BFAP		74LT35DFAP		74LT35OFAP		74LT35EFAP		74LT35WFAP		
280	—	—	200	250	—	3RW4445-6BC35	74MT35BFAP		74MT35DFAP		74MT35OFAP		74MT35EFAP		74MT35WFAP		
315	—	—	250	300	—	3RW4446-6BC35	74NT35BFAP		74NT35DFAP		74NT35OFAP		74NT35EFAP		74NT35WFAP		
385	—	—	300	400	—	3RW4447-6BC35	74PT35BFAP		74PT35DFAP		74PT35OFAP		74PT35EFAP		74PT35WFAP		
494	—	—	400	500	—	3RW4453-6BC35	74QT35BFAT		74QT35DFAT		74QT35OFAT		74QT35EFAT		74QT35WFAT		
551	—	—	450	600	—	3RW4454-6BC35	74RT35BFAT		74RT35DFAT		74RT35OFAT		74RT35EFAT		74RT35WFAT		
615	—	—	500	700	—	3RW4455-6BC35	74ST35BFAT		74ST35DFAT		74ST35OFAT		74ST35EFAT		74ST35WFAT		
693	—	—	550	750	—	3RW4456-6BC35	74TT35BFAT		74TT35DFAT		74TT35OFAT		74TT35EFAT		74TT35WFAT		
780	—	—	600	850	—	3RW4457-6BC35	74WT35BFAT		74WT35DFAT		74WT35OFAT		74WT35EFAT		74WT35WFAT		
970	—	—	800	1000	—	3RW4465-6BC35	74YT35BFAT		74YT35DFAT		74YT35OFAT		74YT35EFAT		74YT35WFAT		
1076	—	—	900	1100	—	3RW4466-6BC35	74ZT35BFAT		74ZT35DFAT		74ZT35OFAT		74ZT35EFAT		74ZT35WFAT		

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.
- For stocked versions see page 7/89.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Circuit breaker with disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

3RW44 For High Feature Applications

Enclosed Combination with Circuit Breaker Disconnect

Rated Operating Current	MAX HP ^①				KW	Class 20 Severe Duty (350% * Im for 20s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)		List Price \$	List Price \$		List Price \$	List Price \$	NEMA 4/4X Stainless Steel	List Price \$	
								NEMA 1	NEMA 3R	NEMA 12	NEMA 4					
26	7.5	7.5	15	—	12	3RW4422-1BC34	74AT3_BFAP	74AT3_DFAP	74AT3_OFAP	74AT3_EFAP	74AT3_WFAP					
32	10	10	20	—	15	3RW4423-1BC34	74BT3_BFAP	74BT3_DFAP	74BT3_OFAP	74BT3_EFAP	74BT3_WFAP					
42	10	15	25	—	19	3RW4424-1BC34	74CT3_BFAP	74CT3_DFAP	74CT3_OFAP	74CT3_EFAP	74CT3_WFAP					
51	15	15	30	—	22	3RW4425-1BC34	74DT3_BFAP	74DT3_DFAP	74DT3_OFAP	74DT3_EFAP	74DT3_WFAP					
68	20	25	50	—	37	3RW4426-1BC34	74ET3_BFAP	74ET3_DFAP	74ET3_OFAP	74ET3_EFAP	74ET3_WFAP					
82	25	30	60	—	45	3RW4427-1BC34	74FT3_BFAP	74FT3_DFAP	74FT3_OFAP	74FT3_EFAP	74FT3_WFAP					
97	30	30	60	—	45	3RW4434-6BC34	74GT3_BFAP	74GT3_DFAP	74GT3_OFAP	74GT3_EFAP	74GT3_WFAP					
113	30	40	75	—	56	3RW4435-6BC34	74HT3_BFAP	74HT3_DFAP	74HT3_OFAP	74HT3_EFAP	74HT3_WFAP					
134	40	50	75	—	56	3RW4436-6BC34	74JT3_BFAP	74JT3_DFAP	74JT3_OFAP	74JT3_EFAP	74JT3_WFAP					
175	50	60	100	—	75	3RW4443-6BC34	74KT3_BFAP	74KT3_DFAP	74KT3_OFAP	74KT3_EFAP	74KT3_WFAP					
195	60	75	125	—	93	3RW4444-6BC34	74LT3_BFAP	74LT3_DFAP	74LT3_OFAP	74LT3_EFAP	74LT3_WFAP					
243	75	75	150	—	112	3RW4445-6BC34	74MT3_BFAP	74MT3_DFAP	74MT3_OFAP	74MT3_EFAP	74MT3_WFAP					
263	75	100	200	—	149	3RW4446-6BC34	74NT3_BFAP	74NT3_DFAP	74NT3_OFAP	74NT3_EFAP	74NT3_WFAP					
326	100	125	250	—	186	3RW4447-6BC34	74PT3_BFAP	74PT3_DFAP	74PT3_OFAP	74PT3_EFAP	74PT3_WFAP					
494	150	150	400	—	224	3RW4453-6BC34	74QT3_BFAT	74QT3_DFAT	74QT3_OFAT	74QT3_EFAT	74QT3_WFAT					
551	150	200	450	—	298	3RW4454-6BC34	74RT3_BFAT	74RT3_DFAT	74RT3_OFAT	74RT3_EFAT	74RT3_WFAT					
615	200	200	500	—	336	3RW4455-6BC34	74ST3_BFAT	74ST3_DFAT	74ST3_OFAT	74ST3_EFAT	74ST3_WFAT					
634	200	250	500	—	373	3RW4456-6BC34	74TT3_BFAT	74TT3_DFAT	74TT3_OFAT	74TT3_EFAT	74TT3_WFAT					
650	200	250	550	—	410	3RW4457-6BC34	74WT3_BFAT	74WT3_DFAT	74WT3_OFAT	74WT3_EFAT	74WT3_WFAT					
880	300	350	700	—	522	3RW4465-6BC34	74YT3_BFAT	74YT3_DFAT	74YT3_OFAT	74YT3_EFAT	74YT3_WFAT					
940	300	350	750	—	559	3RW4466-6BC34	74ZT3_BFAT	74ZT3_DFAT	74ZT3_OFAT	74ZT3_EFAT	74ZT3_WFAT					
						200V	6	6	6	6	6					
						230V	2	2	2	2	2					
						380V	3	3	3	3	3					
						460V	4	4	4	4	4					
26	—	—	15	20	—	3RW4422-1BC35	74AT35BFAP	74AT35DFAP	74AT35OFAP	74AT35EFAP	74AT35WFAP					
32	—	—	20	25	—	3RW4423-1BC35	74BT35BFAP	74BT35DFAP	74BT35OFAP	74BT35EFAP	74BT35WFAP					
42	—	—	25	30	—	3RW4424-1BC35	74CT35BFAP	74CT35DFAP	74CT35OFAP	74CT35EFAP	74CT35WFAP					
51	—	—	30	40	—	3RW4425-1BC35	74DT35BFAP	74DT35DFAP	74DT35OFAP	74DT35EFAP	74DT35WFAP					
68	—	—	50	50	—	3RW4426-1BC35	74ET35BFAP	74ET35DFAP	74ET35OFAP	74ET35EFAP	74ET35WFAP					
82	—	—	60	75	—	3RW4427-1BC35	74FT35BFAP	74FT35DFAP	74FT35OFAP	74FT35EFAP	74FT35WFAP					
97	—	—	60	75	—	3RW4434-6BC35	74GT35BFAP	74GT35DFAP	74GT35OFAP	74GT35EFAP	74GT35WFAP					
113	—	—	75	100	—	3RW4435-6BC35	74HT35BFAP	74HT35DFAP	74HT35OFAP	74HT35EFAP	74HT35WFAP					
134	—	—	75	125	—	3RW4436-6BC35	74JT35BFAP	74JT35DFAP	74JT35OFAP	74JT35EFAP	74JT35WFAP					
175	—	—	100	150	—	3RW4443-6BC35	74KT35BFAP	74KT35DFAP	74KT35OFAP	74KT35EFAP	74KT35WFAP					
195	—	—	125	200	—	3RW4444-6BC35	74LT35BFAP	74LT35DFAP	74LT35OFAP	74LT35EFAP	74LT35WFAP					
243	—	—	150	200	—	3RW4445-6BC35	74MT35BFAP	74MT35DFAP	74MT35OFAP	74MT35EFAP	74MT35WFAP					
263	—	—	200	250	—	3RW4446-6BC35	74NT35BFAP	74NT35DFAP	74NT35OFAP	74NT35EFAP	74NT35WFAP					
326	—	—	250	300	—	3RW4447-6BC35	74PT35BFAP	74PT35DFAP	74PT35OFAP	74PT35EFAP	74PT35WFAP					
494	—	—	400	500	—	3RW4453-6BC35	74QT35BFAT	74QT35DFAT	74QT35OFAT	74QT35EFAT	74QT35WFAT					
551	—	—	450	550	—	3RW4454-6BC35	74RT35BFAT	74RT35DFAT	74RT35OFAT	74RT35EFAT	74RT35WFAT					
615	—	—	500	600	—	3RW4455-6BC35	74ST35BFAT	74ST35DFAT	74ST35OFAT	74ST35EFAT	74ST35WFAT					
693	—	—	500	650	—	3RW4456-6BC35	74TT35BFAT	74TT35DFAT	74TT35OFAT	74TT35EFAT	74TT35WFAT					
780	—	—	550	700	—	3RW4457-6BC35	74WT35BFAT	74WT35DFAT	74WT35OFAT	74WT35EFAT	74WT35WFAT					
880	—	—	700	850	—	3RW4465-6BC35	74YT35BFAT	74YT35DFAT	74YT35OFAT	74YT35EFAT	74YT35WFAT					
940	—	—	750	900	—	3RW4466-6BC35	74ZT35BFAT	74ZT35DFAT	74ZT35OFAT	74ZT35EFAT	74ZT35WFAT					

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor.

HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.

Class 74 non-combination starters include:

- NEMA rated enclosure
- 3RW44 Sirius softstarter with built-in OL and bypass
- Fusible disconnect
- Control circuit transformer
- Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW44 For High Feature Applications

Enclosed Combination with Fusible Disconnect

Rated Operating Current	MAX HP [ⓐ]				KW	Class 10 Light Duty [ⓑ] (350% * Im for 10s)											
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel	List Price \$
26	7.5	7.5	15	—	12	3RW4422-1BC34	74AT3_BFAF		74AT3_DFAF		74AT3_OFAF		74AT3_EFAF		74AT3_WFAF		
32	10	10	20	—	15	3RW4423-1BC34	74BT3_BFAF		74BT3_DFAF		74BT3_OFAF		74BT3_EFAF		74BT3_WFAF		
42	10	15	25	—	19	3RW4424-1BC34	74CT3_BFAF		74CT3_DFAF		74CT3_OFAF		74CT3_EFAF		74CT3_WFAF		
51	15	15	30	—	22	3RW4425-1BC34	74DT3_BFAF		74DT3_DFAF		74DT3_OFAF		74DT3_EFAF		74DT3_WFAF		
68	20	25	50	—	37	3RW4426-1BC34	74ET3_BFAF		74ET3_DFAF		74ET3_OFAF		74ET3_EFAF		74ET3_WFAF		
82	25	30	60	—	45	3RW4427-1BC34	74FT3_BFAF		74FT3_DFAF		74FT3_OFAF		74FT3_EFAF		74FT3_WFAF		
100	30	30	75	—	56	3RW4434-6BC34	74GT3_BFAF		74GT3_DFAF		74GT3_OFAF		74GT3_EFAF		74GT3_WFAF		
117	30	40	75	—	56	3RW4435-6BC34	74HT3_BFAF		74HT3_DFAF		74HT3_OFAF		74HT3_EFAF		74HT3_WFAF		
145	40	50	100	—	75	3RW4436-6BC34	74JT3_BFAF		74JT3_DFAF		74JT3_OFAF		74JT3_EFAF		74JT3_WFAF		
180	60	60	125	—	93	3RW4443-6BC34	74KT3_BFAF		74KT3_DFAF		74KT3_OFAF		74KT3_EFAF		74KT3_WFAF		
215	60	75	150	—	112	3RW4444-6BC34	74LT3_BFAF		74LT3_DFAF		74LT3_OFAF		74LT3_EFAF		74LT3_WFAF		
280	75	100	200	—	149	3RW4445-6BC34	74MT3_BFAF		74MT3_DFAF		74MT3_OFAF		74MT3_EFAF		74MT3_WFAF		
315	100	125	250	—	186	3RW4446-6BC34	74NT3_BFAF		74NT3_DFAF		74NT3_OFAF		74NT3_EFAF		74NT3_WFAF		
385	125	150	300	—	224	3RW4447-6BC34	74PT3_BFAF		74PT3_DFAF		74PT3_OFAF		74PT3_EFAF		74PT3_WFAF		
494	150	200	400	—	298	3RW4453-6BC34	74QT3_BFAF		74QT3_DFAF		74QT3_OFAF		74QT3_EFAF		74QT3_WFAF		
551	150	200	450	—	336	3RW4454-6BC34	74RT3_BFAF		74RT3_DFAF		74RT3_OFAF		74RT3_EFAF		74RT3_WFAF		
615	200	250	500	—	373	3RW4455-6BC34	74ST3_BFAF		74ST3_DFAF		74ST3_OFAF		74ST3_EFAF		74ST3_WFAF		
693	200	250	550	—	447	3RW4456-6BC34	74TT3_BFAF		74TT3_DFAF		74TT3_OFAF		74TT3_EFAF		74TT3_WFAF		
780	200	250	600	—	447	3RW4457-6BC34	74WT3_BFAF		74WT3_DFAF		74WT3_OFAF		74WT3_EFAF		74WT3_WFAF		
						200V	6		6		6		6		6		
						230V	2		2		2		2		2		
						380V	3		3		3		3		3		
						460V	4		4		4		4		4		
26	—	—	15	20	—	3RW4422-1BC35	74AT35BFAF		74AT35DFAF		74AT35OFAF		74AT35EFAF		74AT35WFAF		
32	—	—	20	25	—	3RW4423-1BC35	74BT35BFAF		74BT35DFAF		74BT35OFAF		74BT35EFAF		74BT35WFAF		
42	—	—	25	30	—	3RW4424-1BC35	74CT35BFAF		74CT35DFAF		74CT35OFAF		74CT35EFAF		74CT35WFAF		
51	—	—	30	40	—	3RW4425-1BC35	74DT35BFAF		74DT35DFAF		74DT35OFAF		74DT35EFAF		74DT35WFAF		
68	—	—	50	50	—	3RW4426-1BC35	74ET35BFAF		74ET35DFAF		74ET35OFAF		74ET35EFAF		74ET35WFAF		
82	—	—	60	75	—	3RW4427-1BC35	74FT35BFAF		74FT35DFAF		74FT35OFAF		74FT35EFAF		74FT35WFAF		
100	—	—	75	75	—	3RW4434-6BC35	74GT35BFAF		74GT35DFAF		74GT35OFAF		74GT35EFAF		74GT35WFAF		
117	—	—	75	100	—	3RW4435-6BC35	74HT35BFAF		74HT35DFAF		74HT35OFAF		74HT35EFAF		74HT35WFAF		
145	—	—	100	125	—	3RW4436-6BC35	74JT35BFAF		74JT35DFAF		74JT35OFAF		74JT35EFAF		74JT35WFAF		
180	—	—	125	150	—	3RW4443-6BC35	74KT35BFAF		74KT35DFAF		74KT35OFAF		74KT35EFAF		74KT35WFAF		
215	—	—	150	200	—	3RW4444-6BC35	74LT35BFAF		74LT35DFAF		74LT35OFAF		74LT35EFAF		74LT35WFAF		
280	—	—	200	250	—	3RW4445-6BC35	74MT35BFAF		74MT35DFAF		74MT35OFAF		74MT35EFAF		74MT35WFAF		
315	—	—	250	300	—	3RW4446-6BC35	74NT35BFAF		74NT35DFAF		74NT35OFAF		74NT35EFAF		74NT35WFAF		
385	—	—	300	400	—	3RW4447-6BC35	74PT35BFAF		74PT35DFAF		74PT35OFAF		74PT35EFAF		74PT35WFAF		
494	—	—	400	500	—	3RW4453-6BC35	74QT35BFAF		74QT35DFAF		74QT35OFAF		74QT35EFAF		74QT35WFAF		
551	—	—	450	600	—	3RW4454-6BC35	74RT35BFAF		74RT35DFAF		74RT35OFAF		74RT35EFAF		74RT35WFAF		
615	—	—	500	700	—	3RW4455-6BC35	74ST35BFAF		74ST35DFAF		74ST35OFAF		74ST35EFAF		74ST35WFAF		
693	—	—	550	750	—	3RW4456-6BC35	74TT35BFAF		74TT35DFAF		74TT35OFAF		74TT35EFAF		74TT35WFAF		
780	—	—	600	850	—	3RW4457-6BC35	74WT35BFAF		74WT35DFAF		74WT35OFAF		74WT35EFAF		74WT35WFAF		

ⓐ Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

ⓑ Starter selection is dependent on type of application. Im = FLA rating of motor.

Enclosed 3RW44



3RW44 Enclosed features:

- Available in NEMA 1, 12, 3R, 4, and 4 stainless steel
- Compact size
- Built-in bypass contactor
- Multiple starting/stopping techniques including torque control
- Internal overload class 5, 10, 15, 20, or 30
- Built-in graphical LCD keypad
- Internal self protection
- Fault monitoring
- 3 parameter sets
- Communication capable via opt. Profibus module
- Programmable inputs and outputs
- External keypad available

Ordering Information

- Enclosed devices should be ordered by the FLA of the motor.
- The 3RW44 is designed for normal starting applications.
- For factory modifications see page 7/124.
- For dimensional drawings see page 7/125.
- Class 74 non-combination starters include:
 - NEMA rated enclosure
 - 3RW44 Sirius softstarter with built-in OL and bypass
 - Fusible disconnect
 - Control circuit transformer
 - Reset button

Ideal applications for 3RW44 enclosed softstarters:

- Fans
- Pumps
- Conveying systems and lifts
- Hydraulics
- Machine tools
- Mills saws
- Crushers and grinders
- Mixers
- HVAC systems

The 3RW44 severe duty rating table should be applied for high inertia applications such rock crushers, chippers, screw compressors, ect.

Class 74 starters are built to UL and CSA standards.

For all technical information, please consult the 2006 Industrial Controls Catalog or contact your local sales support center.

3RW44 For High Feature Applications
Enclosed Combination with Fusible Disconnect

Rated Operating Current	MAX HP ^①				KW	Class 20 Severe Duty (350% * Im for 20s) ^②										
	200V	230V	460V	575V		380V	OPEN Style (Starter Only)	NEMA 1	List Price \$	NEMA 3R	List Price \$	NEMA 12	List Price \$	NEMA 4	List Price \$	NEMA 4/4X Stainless Steel
26	7.5	7.5	15	—	12	3RW4422-1BC34	74AT3_BFAF		74AT3_DFAF		74AT3_OFAF		74AT3_EFAF		74AT3_WFAF	
32	10	10	20	—	15	3RW4423-1BC34	74BT3_BFAF		74BT3_DFAF		74BT3_OFAF		74BT3_EFAF		74BT3_WFAF	
42	10	15	25	—	19	3RW4424-1BC34	74CT3_BFAF		74CT3_DFAF		74CT3_OFAF		74CT3_EFAF		74CT3_WFAF	
51	15	15	30	—	22	3RW4425-1BC34	74DT3_BFAF		74DT3_DFAF		74DT3_OFAF		74DT3_EFAF		74DT3_WFAF	
68	20	25	50	—	37	3RW4426-1BC34	74ET3_BFAF		74ET3_DFAF		74ET3_OFAF		74ET3_EFAF		74ET3_WFAF	
82	25	30	60	—	45	3RW4427-1BC34	74FT3_BFAF		74FT3_DFAF		74FT3_OFAF		74FT3_EFAF		74FT3_WFAF	
97	30	30	60	—	45	3RW4434-6BC34	74GT3_BFAF		74GT3_DFAF		74GT3_OFAF		74GT3_EFAF		74GT3_WFAF	
113	30	40	75	—	56	3RW4435-6BC34	74HT3_BFAF		74HT3_DFAF		74HT3_OFAF		74HT3_EFAF		74HT3_WFAF	
134	40	50	75	—	56	3RW4436-6BC34	74JT3_BFAF		74JT3_DFAF		74JT3_OFAF		74JT3_EFAF		74JT3_WFAF	
175	50	60	100	—	75	3RW4443-6BC34	74KT3_BFAF		74KT3_DFAF		74KT3_OFAF		74KT3_EFAF		74KT3_WFAF	
195	60	75	125	—	93	3RW4444-6BC34	74LT3_BFAF		74LT3_DFAF		74LT3_OFAF		74LT3_EFAF		74LT3_WFAF	
243	75	75	150	—	112	3RW4445-6BC34	74MT3_BFAF		74MT3_DFAF		74MT3_OFAF		74MT3_EFAF		74MT3_WFAF	
263	75	100	200	—	149	3RW4446-6BC34	74NT3_BFAF		74NT3_DFAF		74NT3_OFAF		74NT3_EFAF		74NT3_WFAF	
326	100	125	250	—	186	3RW4447-6BC34	74PT3_BFAF		74PT3_DFAF		74PT3_OFAF		74PT3_EFAF		74PT3_WFAF	
494	150	150	400	—	298	3RW4453-6BC34	74QT3_BFAF		74QT3_DFAF		74QT3_OFAF		74QT3_EFAF		74QT3_WFAF	
551	150	200	450	—	336	3RW4454-6BC34	74RT3_BFAF		74RT3_DFAF		74RT3_OFAF		74RT3_EFAF		74RT3_WFAF	
615	200	200	500	—	373	3RW4455-6BC34	74ST3_BFAF		74ST3_DFAF		74ST3_OFAF		74ST3_EFAF		74ST3_WFAF	
634	200	250	500	—	373	3RW4456-6BC34	74TT3_BFAF		74TT3_DFAF		74TT3_OFAF		74TT3_EFAF		74TT3_WFAF	
650	200	250	550	—	373	3RW4457-6BC34	74WT3_BFAF		74WT3_DFAF		74WT3_OFAF		74WT3_EFAF		74WT3_WFAF	
						200V	6		6		6		6		6	
						230V	2		2		2		2		2	
						380V	3		3		3		3		3	
						460V	4		4		4		4		4	
26	—	—	15	20	—	3RW4422-1BC35	74AT35BFAP		74AT35DFAP		74AT35OFAP		74AT35EFAP		74AT35WFAP	
32	—	—	20	25	—	3RW4423-1BC35	74BT35BFAP		74BT35DFAP		74BT35OFAP		74BT35EFAP		74BT35WFAP	
42	—	—	25	30	—	3RW4424-1BC35	74CT35BFAP		74CT35DFAP		74CT35OFAP		74CT35EFAP		74CT35WFAP	
51	—	—	30	40	—	3RW4425-1BC35	74DT35BFAP		74DT35DFAP		74DT35OFAP		74DT35EFAP		74DT35WFAP	
68	—	—	50	50	—	3RW4426-1BC35	74ET35BFAP		74ET35DFAP		74ET35OFAP		74ET35EFAP		74ET35WFAP	
82	—	—	60	75	—	3RW4427-1BC35	74FT35BFAP		74FT35DFAP		74FT35OFAP		74FT35EFAP		74FT35WFAP	
97	—	—	60	75	—	3RW4434-6BC35	74GT35BFAP		74GT35DFAP		74GT35OFAP		74GT35EFAP		74GT35WFAP	
113	—	—	75	100	—	3RW4435-6BC35	74HT35BFAP		74HT35DFAP		74HT35OFAP		74HT35EFAP		74HT35WFAP	
134	—	—	75	125	—	3RW4436-6BC35	74JT35BFAP		74JT35DFAP		74JT35OFAP		74JT35EFAP		74JT35WFAP	
175	—	—	100	150	—	3RW4443-6BC35	74KT35BFAP		74KT35DFAP		74KT35OFAP		74KT35EFAP		74KT35WFAP	
195	—	—	125	200	—	3RW4444-6BC35	74LT35BFAP		74LT35DFAP		74LT35OFAP		74LT35EFAP		74LT35WFAP	
243	—	—	150	200	—	3RW4445-6BC35	74MT35BFAP		74MT35DFAP		74MT35OFAP		74MT35EFAP		74MT35WFAP	
263	—	—	200	250	—	3RW4446-6BC35	74NT35BFAP		74NT35DFAP		74NT35OFAP		74NT35EFAP		74NT35WFAP	
326	—	—	250	300	—	3RW4447-6BC35	74PT35BFAP		74PT35DFAP		74PT35OFAP		74PT35EFAP		74PT35WFAP	
494	—	—	400	500	—	3RW4453-6BC35	74QT35BFAP		74QT35DFAP		74QT35OFAP		74QT35EFAP		74QT35WFAP	
551	—	—	450	550	—	3RW4454-6BC35	74RT35BFAP		74RT35DFAP		74RT35OFAP		74RT35EFAP		74RT35WFAP	
615	—	—	500	600	—	3RW4455-6BC35	74ST35BFAP		74ST35DFAP		74ST35OFAP		74ST35EFAP		74ST35WFAP	
693	—	—	550	650	—	3RW4456-6BC35	74TT35BFAP		74TT35DFAP		74TT35OFAP		74TT35EFAP		74TT35WFAP	
780	—	—	600	700	—	3RW4457-6BC35	74WT35BFAP		74WT35DFAP		74WT35OFAP		74WT35EFAP		74WT35WFAP	

① Starter size is dependent on the nameplate Full Load Amps (FLA) rating of the motor. HPs are for reference only. Enclosed ratings are at 40°C.

② Starter selection is dependent on type of application. Im = FLA rating of motor.

Factory Modifications

Modification Available modifications in STANDARD enclosure	3RW Version	Enclosed Style	Enclosure NEMA Type	Mod Suffix
Push Buttons				
Start/Stop	3RW40/44	73/74	ALL	A1
Emergency Stop	3RW40/44	73/74	ALL	ES
Selector Switches				
Hand-Off-Auto	3RW40/44	73/74	ALL	A3
Hand-Off-Auto w/ start pushbutton	3RW40/44	73/74	ALL	S3
Off-On	3RW40/44	73/74	ALL	A4
Pilot Light				
Red 'On'	3RW40/44	73/74	ALL	FA
Green 'On'	3RW40/44	73/74	ALL	FB
Red 'Run'	3RW40/44	73/74	ALL	FC
Green 'Run'	3RW40/44	73/74	ALL	FD
LED Bulb Upgrade ^①	3RW40/44	73/74	ALL	FE
Red 'Off'	3RW40/44	73/74	ALL	FJ
Green 'Off'	3RW40/44	73/74	ALL	FK
Amber 'Fault'	3RW40/44	73/74	ALL	FL
White 'Control Power On'	3RW40/44	73/74	ALL	FW
Red, 'On' Push-to-Test	3RW40/44	73/74	ALL	FS
Green 'On' Push-to-Test	3RW40/44	73/74	ALL	FT
Green 'Off' Push-to-Test	3RW40/44	73/74	ALL	FU
Custom pilot light (state color and nameplate text)	3RW40/44	73/74	ALL	FZ
Through the Door Metering				
External keypad for 3RW44	3RW44	73/74	1,12	K1
Elapse time meter	3RW40/44	73/74	1,12 (120V)	M5
Control Options				
Profibus Communication Module (installed-connection cable not supplied)	3RW44	73/74	ALL	P1
Profinet Communication Module (installed-connection cable not supplied)	3RW44	73/74	ALL	P2
Ground Lug - 1 Conductor	3RW40/44	73/74	ALL	L10
Alarm Package (horn, light, relay & push button)	3RW40/44	73/74	1,3R,12	M7
Electronic 8 function timing relay (.05s - 100h) 24V/100-127V supplied mounted and unwired	3RW40/44	73/74	ALL	TR
Control Relay supplied mounted and unwired (4 pole max)	3RW40/44	73/74	ALL	R04 R22 R40
Circuit Breaker Shunt Trip (included std in 3RW40 versions)	3RW44	74	ALL	L6
Function identification plate w/ marking as specified	3RW40/44	73/74	ALL	N1
Service Entrance Labeled	3RW40/44	74	ALL	N3
Terminal Block 3 point	3RW40/44	73/74	ALL	TC3
Terminal Block 6 point	3RW40/44	73/74	ALL	TC6
Terminal Block 9 point	3RW40/44	73/74	ALL	TC9
Terminal Block 12 point	3RW40/44	73/74	ALL	TC12


Emergency HP Rated Bypass Starter	3RW Version	Class	Enclosure NEMA Type	Mod Suffix
	3RW40 ^②	73/74	1/12/3R/4	A12

Available Modifications Requiring the MODIFIED OPTIONS Box Size (to be used with the selections ending in GA*)	3RW Version	Class	Enclosure NEMA Type	Mod Suffix
Isolation Contactor ^③	3RW40/44	73/74	1/12/3R/4	IC
100 VA Extra CPT Capacity	3RW40/44	73/74	ALL	CA
Space Heater (120V separate control)	3RW40/44	73/74	ALL	SH
Space Heater w/ T-stat (120V separate control)	3RW40/44	73/74	ALL	ST
Lightning Arrestor	3RW40/44	73/74	ALL	L

① (A) For sizes 73YT & 73ZT, mods IC & A12 are available individually or together;
(B) For sizes 74YT & 74ZT (combination w/ CB), mods IC & A12 are only available individually (NOT together); (C) For sizes 74YT & 74ZT (combination w/ fusible disc), mods IC & A12 are NOT available individually or together.
② An isolation contactor is included with the emergency HP rated bypass starter for version 3RW40 soft starters.

③ Isolation contactor IC is included as standard with version 3RW40 model R (4th character of the cat. no.) soft starters.
④ Pilot lights are transformer type as standard. For LED type bulbs, order suffix FE in addition to the standard device suffix(es). For example, to order red "ON" and green "OFF" pilot lights with LED bulbs, order FA, FK and FE.

Class 73, 74

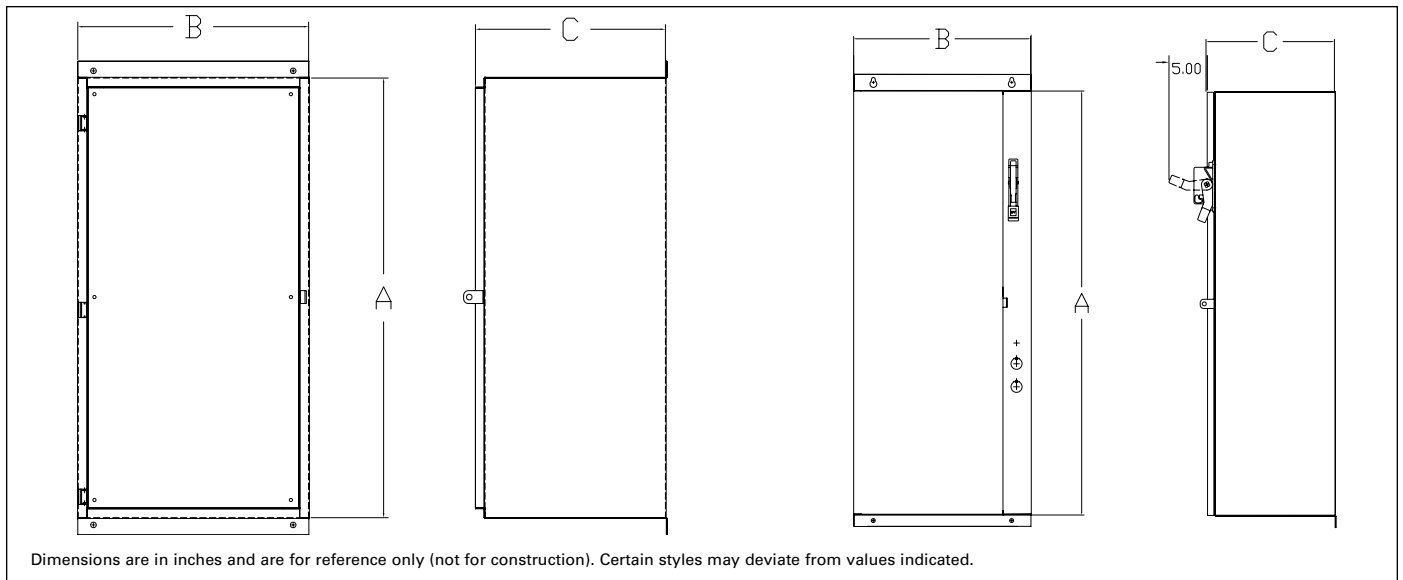

Non-Combination Class 73

N1, N3R, N12, N4 Standard Enclosure

	Amps	A	B	C
3RW40new	11 - 73	25	18	13
	98	36	23	10
3RW40	117-145	36	18	15
	205-315	36	22	20
	385	54	36	20
3RW44	26 - 68	26	12.5	15
	82 - 117	36	18	15
	145 - 215	36	22	20
	280 - 385	54	36	20
	494 - 780	90	40	20
	970 - 1076	90	50	20

N4X Stainless Steel Standard Enclosure

	Amps	A	B	C
3RW40new	11- 98	55	29	11
3RW40	117	36	18	15
	145 - 205A	36	22	20
	248 - 385	54	36	20
3RW44	26 - 51	26	12.5	15
	68 - 82	36	18	15
	100 - 117	36	22	20
	145 - 385	54	36	20

N1, N3R, N12, N4 Modified Enclosure

	Amps	A	B	C
3RW40	117-385	56	36	20
3RW44	26-51	36	22	20
	68-385	54	36	20

N4X Stainless Steel Modified Enclosure

	Amps	A	B	C
3RW40	117-385	54	36	20
3RW44	26-51	36	22	20
	68-385	54	36	20

Combination Type Class 74

N1, N3R, N12, N4 Standard Enclosure

	Amps	A	B	C
3RW40new	11 - 73	36	20	11
	98	46	20	10
3RW40	117	50	25	20
	145 - 205	66	25	20
	248 - 315	90	30	20
	385	90	40	20
3RW44	26 - 68	36	23	15
	82 - 117	50	25	20
	145 - 215	66	25	20
	280	90	30	20
	315 - 384	90	40	20
	494	90	40	20
	551 - 780	90	40 [Ⓞ]	20
	970 - 1076	90	50	20

N1, N12 Fusible

	Amps	A	B	C
3RW44	494-780	90	50	20

N4X Stainless Steel Standard Enclosure

	Amps	A	B	C
3RW40new	11- 98	55	29	11
3RW40	117 - 145	54	36	20
	205 - 300	90	40	20
3RW44	26 - 42	36	23	15
	51 - 100	50	25	20
	117 - 145	54	36	20
	180 - 385	90	40	20

N1, N3R, N12, N4 Modified Enclosure

	Amps	A	B	C
3RW40	117 - 248	76	30	20
	315	90	30	20
	385	90	40	20
3RW44	26 - 215	76	30	20
	280	90	30	20
	315 - 385	90	40	20

N4X Stainless Steel Modified Enclosure

	Amps	A	B	C
3RW40	117-145	76	30	20
3RW44	26-145	76	30	20

Ⓞ Add 4" for N4.

