


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CL106P-109WM-PF3N **4 INCH APERTURE CLOSET LIGHT SURFACE MOUNT** 

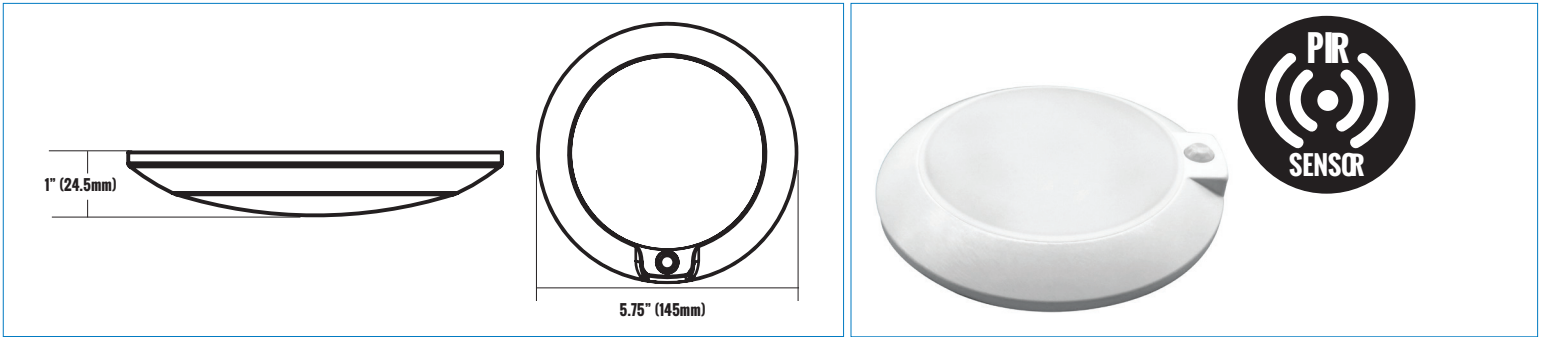

PRODUCT DESCRIPTION


The Etlin-Daniels Ultra-Low-Profile LED Closet Light CL106P-109WM-PF3N offers the latest in compact design, energy savings and auto on/off function with its built-in PIR Sensor. At only 1" in depth and 5.7" in width, and with its frosted polycarbonate diffuser, the CL106P provides for 100° PIR reaction range, with a reaction distance of 4 meters. The dual sized keyless slot rear profile allows for mounting in both 3" and 4" j-boxes. With an auto on/off function, the CL106P Closet Light with built-in PIR Sensor is the ultimate solution for closets, garbage rooms, small storage rooms, basements, residential garages - anywhere a typical fixture can be left on when the space is vacated. The ultra-thin housing will not impede any activity in the small space.

FEATURES

- LED Indoor Light Source
- Surface mount, low profile - 1" housing.
- Frosted polycarbonate lens for even illumination.
- Damp location rated.
- Reaction range - 100° / Reaction distance 4 meters.
- Keyless slot mounting to j-boxes.
- PIR Sensor built in.
- 5 year warranty.
- L70 - 50,000 hours.
- Energy Star approved.

PRODUCT SPECIFICATIONS (OPTICAL DATA)				PRODUCT SPECIFICATIONS (ELECTRICAL DATA)	
SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	CRI	VOLTAGE	POWER FREQ.
72.22LM/W	650LM	3000K	>80CRI	120V	60HZ

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	PRODUCT DIMENSIONS	CARTON SIZE	
10W	PC PLASTIC	>50,000 HOURS	5.75 x 1 INCHES (145 x 24.5 MM)	6.125 X 6.125 X 1.375 INCHES (155 X 155 X 35 MM)	


ADDITIONAL INFORMATION	INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE
	CEILING MOUNT	WHITE MATTE / FROSTED	NON-DIMMABLE PIR SENSOR


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: CL106P-109WM-PF3N **4 INCH APERTURE CLOSET LIGHT SURFACE MOUNT**

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 432.2LM

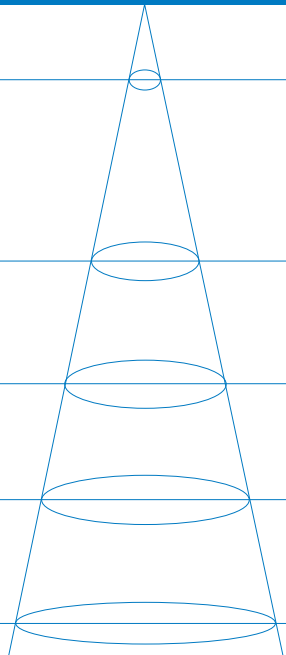3.28FT 1M	6.747,21.35FC 72.63,229.8LX		8.776FT 267.50CM
13.12FT 4M	0.4217,1.334FC 4.539,14.36LX		35.11FT 1070.02CM
19.69FT 6M	0.1874, 0.5931 FC 2.017, 6.384LX		52.66FT 1605.03CM
26.25FT 8M	0.1054, 0.336FC 1.135, 3.591LX		70.21FT 2140.04CM
32.81FT 10M	0.0675, 0.2135FC 0.7263, 2.298LX		87.76FT 2675.04CM
HT	EAVG/EMAX		ANGLE: 106.43DEG

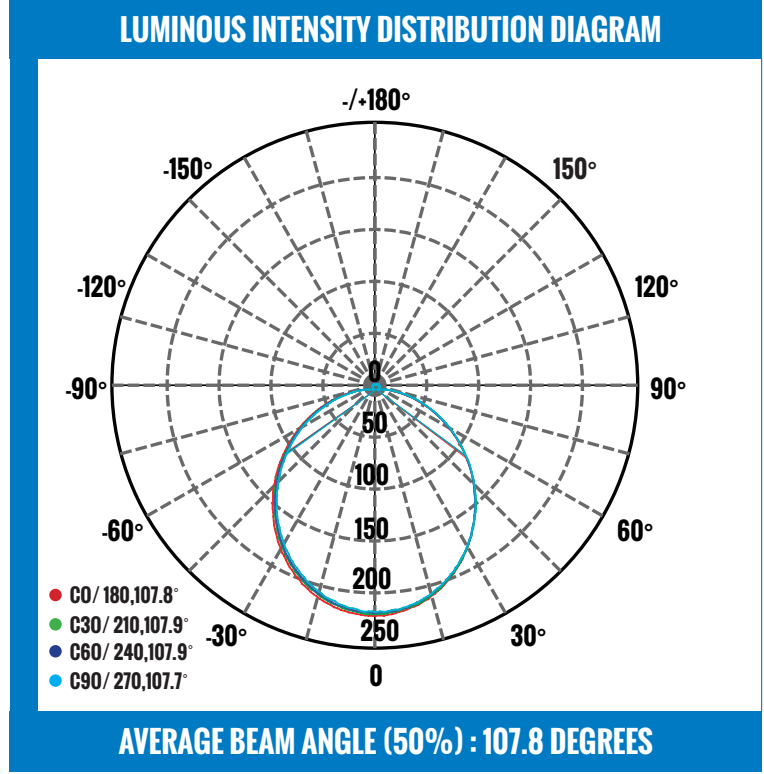

CERTIFICATIONS



CONTROL



ORDERING INFORMATION - CL SERIES

SERIES	WATTAGE	SIZE	CONTROL TYPE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
E.G. CL	10	6	P	WM	PF	3	N
CL - CLOSET LIGHT	10 - 10-9W	6 - 6 INCH	P - PIR SENSOR	WH-WHITE MATTE	PF - PC FROSTED	3 - 3000K	N - NO

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com