

# Liteline RECESSED LIGHTING • LUMINAIRE ENCASTRE

## LED PANEL LIGHTS

### PANNEAU LUMINEUX LED

LEDP Series


**IMPORTANT:** Read all instructions before installing fixtures. Retain for future reference.

**SAFETY:** For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.


**WARNING:** Make certain power is OFF from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.

**INSTALLATION INSTRUCTIONS:**


1. Make sure that the power from the main panel is switched off before starting any installation or maintenance of electrical fixtures.
2. Hold the LED panel 45° in relation to the T-bar direction.
3. Push panel through the T-bar opening (Fig. 1).

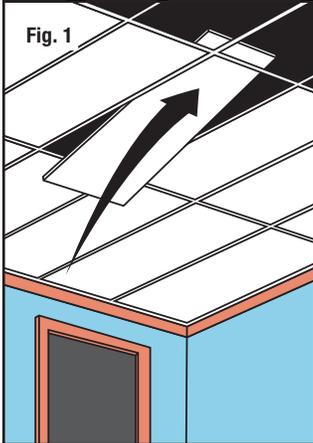


4. Adjust the LED panel so that the light surface is facing downwards and position between the T-bars.
5. Bend the support clips 90° upwards, then bend 90° outwards until the tips of the support clips are positioned above the T-bars (Fig. 2).

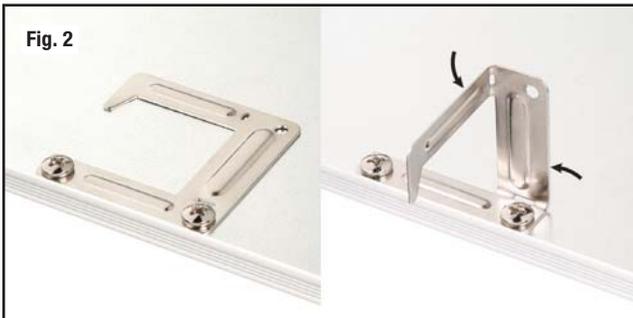


6. Use support cables (supplied by others) to secure the fixture to the structure (use the hole at the top of the support clips) (Fig. 3).

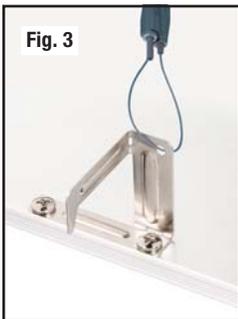


7. Unscrew and remove the cover on the junction box.
8. Bring in a power supply line through one of the knockouts located closest to the input module (Fig. 4). Wire connector required (supplied by others).

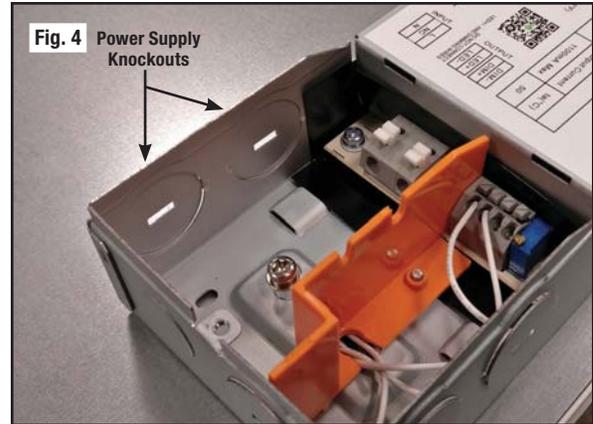

9. Connect the green (or bare copper) wire to the ground screw (located in the middle of the junction box) (Fig. 5).
10. Connect the white wire to the Neutral (N) port of the input module (Fig. 5).
11. Connect the black wire to the Live (L) port of the input module (Fig. 5).

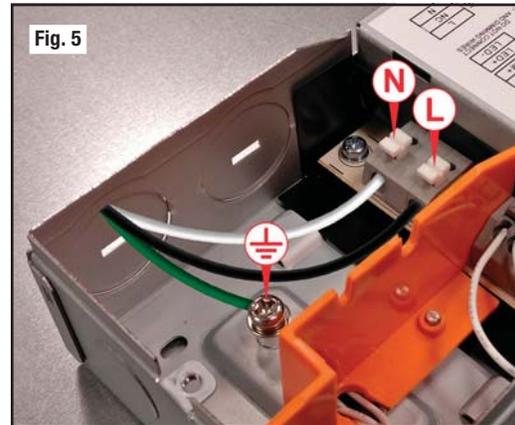

12. Replace the junction box cover back in place and secure with the screw removed from step 7.
13. Use the selector tabs on the side of the driver/junction box to select wattage (preset at highest wattage) and colour temperature (preset at 3500°K) (Fig. 6).

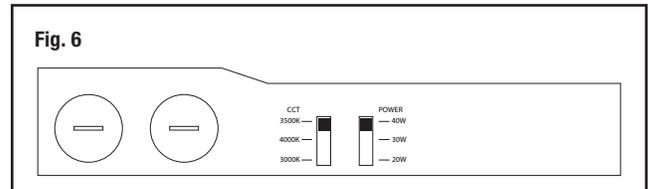

14. Turn the power back on from the main panel.