

This durable flat panel LED ceiling light is designed for a drop ceiling. The CPL features dimmable driver options and comes in a variety of sizes and colour temperatures.



### APPLICATIONS

**Ideal for offices, schools, public buildings, commercial spaces and hospitals.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Housing is made from extruded aluminum. Fixture has an operating temperature range of -40°C to +40°C and is rated for damp location.

#### Electrical

Total system wattage of the unit is 33W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347V also available as an option.

#### LED Configuration

The 33W unit delivers 3,619 lumens. The LEDs have a colour temperature of 4000K as standard with 3,500K and 5,000K colour temperatures available as options.

#### Optics

Edge lit with no glare.

#### Dimming

0-10V Dimming is standard.

#### Mounting

The fixture can be drop ceiling or pendant mounted.

#### Options

- 347V
- CCT tuning version available
- hi/lo occupancy sensor


#### Finish

Aluminum frame with white powder coat paint finish.



<b>Fixture Watts</b>	<b>33W</b>
<b>Lumens</b>	<b>3,619</b>
<b>Efficacy</b>	<b>111 lumens/watt</b>

<b>Certification</b>	<b>cULus, DLC, rated for damp location</b>
<b>LED Life</b>	<b>100,000 hours</b>
<b>Colour Temperature</b>	<b>4000K(standard) 5000K (option) 3500K(option)</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Operating temperature</b>	<b>-40°C to +40°C</b>
<b>Power Factor</b>	<b>0.91</b>
<b>CRI</b>	<b>&gt;80</b>
<b>Total Harmonic Distortion</b>	<b>16%</b>

### DIMENSIONAL DATA

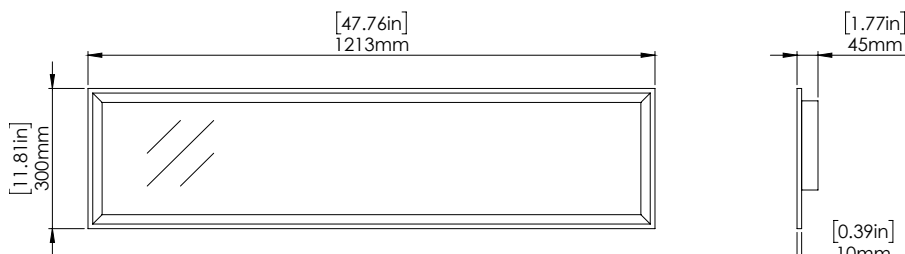

SURFACE MOUNT KIT DIMENSIONS  
(ORDER SEPARATELY)

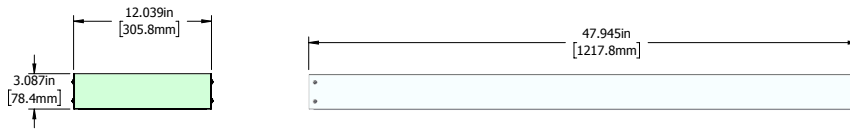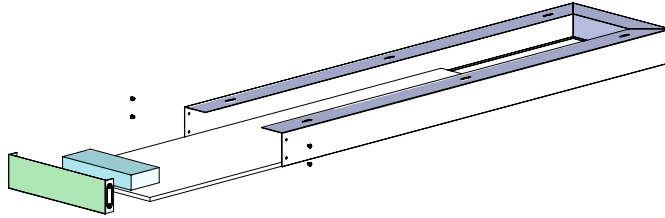

ORDERING GUIDE



**VOLTAGE**

**B - 120 - 277V\***  
**C - 347V**

**COLOUR TEMP**

**5K - 5000K**  
**4K - 4000K\***  
**3.5K - 3500K**  
**VK - Variable colour**

**FINISH**

**WHT - WHITE\***

**OPTIONS**

**DIM - 0-10V DIMMING\***  
**SHFS - Standard On/Off high frequency motion sensor**  
**DHFS - Dimming high frequency motion sensor**

\* Standard configuration