



## System Features and Benefits

- Up to four sources per multi-source system
- Up to eight zones per multi-source system, with ability to expand
- Whole house control via universal remote and keypad
- High performance and standard systems
- Up to two local source inputs per keypad
- Flush mount inputs in single and triple source versions
- Classic design enhances any decor
- Efficient installation via Cat 5 wiring

### COLORS



## RELATED PRODUCTS



F7417-XX  
lyriQ Local Source  
Input



AU7394-XX  
lyriQ Keypad




AU1000-XX  
lyriQ High-Performance  
Keypad



AU7400-XX  
lyriQ Single Source, 4-Zone Kit

## WIRING DIAGRAM

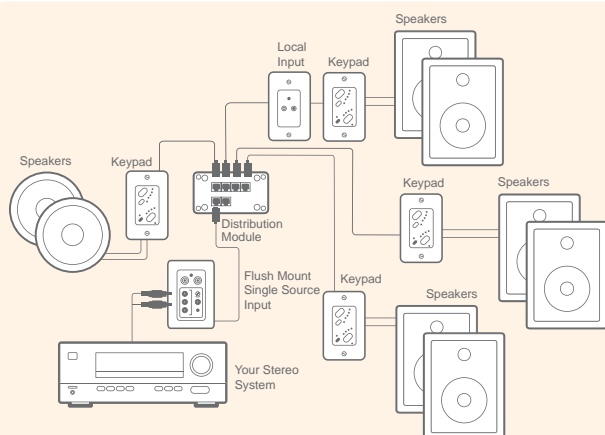






### INSTALLATION AT-A-GLANCE lyriQ SINGLE-SOURCE AUDIO SYSTEM

1. Run a single Cat 5 cable and 16/4 speaker wire to each location where a keypad will be installed.
2. Install each keypad in a standard single gang box and connect the Cat 5 cable and a pair of speakers to the keypad.
3. Install the single source distribution module in the On-Q enclosure and connect it to the keypads and source input.
4. Run a Cat 5 cable from the module to the location where the source input will be installed.
5. Install the input in a standard single-gang box and connect the Cat 5.
6. Connect the audio source to the source input.



## lyriQ™ SOURCE INPUTS

PRODUCT	PART #	DESCRIPTION	DIMENSIONS
lyriQ Local Source Input 	F7417-BK F7417-IV F7417-LA F7417-WH	The lyriQ Local Source Input enables users to plug in devices locally for in-room entertainment. Listen to personal audio players, enjoy video games and watch TV with rich sound output to local speakers. The local source input automatically overrides the remote source music in the room and returns to the main source when the local source is turned off.	4.2" H x 1.65" W
lyriQ Flush Mount Triple Source Input 	AU1011-BK AU1011-LA AU1011-WH	The lyriQ Flush Mount Triple Source Input connects to the Four-Source, Eight-Zone Module to distribute three audio sources throughout the home. It features two RJ45 connections, adjustable gain control for each input, three IR emitter ports and one IR target port. Pair with the lyriQ Single Source Input in flush-mount or standard versions (AU1004 or F7398).	4.2" H x 3.3" W
lyriQ Flush Mount Single Source Input 	AU1004-BK AU1004-LA AU1004-WH	The lyriQ Flush Mount Single Source Input connects to a lyriQ distribution module to distribute one audio source throughout the home. It features an RJ45 connection, adjustable gain control, an IR emitter port and an IR target port.	4.2" H x 1.65" W
lyriQ Triple Source Input 	F7428	The lyriQ Triple Source Input connects to the Four-Source, Eight-Zone Module to distribute three audio sources throughout the home. It features two RJ45 connections, adjustable gain control for each input, three IR emitter ports and one IR target port. Pair with the lyriQ Single Source Input in flush-mount or standard versions (AU1004 or F7398).	2.45" H x 4.5" W x 1.25" D
lyriQ Single Source Input 	F7398	The lyriQ Single Source Input connects to a lyriQ distribution module to distribute one audio source throughout the home. It features an RJ45 connection, adjustable gain control, an IR emitter port and an IR target port.	2.45" H x 4.5" W x 1.25" D

## COLOR OPTIONS

