


# CPL22-LED32

Indoor ceiling light

This durable flat panel LED ceiling light is designed for a drop ceiling. The CPL features dimmable driver options and comes in a variety of sizes and colour temperatures.

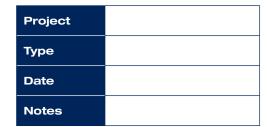

#### **APPLICATIONS**

Ideal for offices, schools, public buildings, commercial spaces and hospitals.

### **SPECIFICATIONS**

#### Construction

Housing is made from extruded aluminum. Fixture has an operating temperature range of -40°C to +40°C and is rated for damp location.

#### Electrical

Total system wattage of the unit is 35W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347V also available as an option.

#### **LED** Configuration

The 35W unit delivers 3,896 lumens. The LEDs have a colour temperature of 4000K as standard with 3,500K and 5,000K colour temperatures available as options.

#### Optics

Edge lit with no glare.

#### Dimming

0-10V dimming is standard

#### Mounting

The fixture can be drop ceiling or pendant mounted.

### Options

- 347V
- hi/lo occupancy sensor
- CCT tuning version available


#### Finish


Aluminum frame with white powder coat paint finish.

Fixture Watts	35W
Lumens	3,896
Efficacy	113 lumens/watt

Certification	cULus, DLC, rated for damp location
LED Life	100,000 hours
Colour Temperature	4000K(standard) 5000K (option) 3500K(option)
Warranty	5 Years
Operating temperature	-40°C to +40°C
Power Factor	0.92
CRI	>80
Total Harmonic Distortion	16.9%

#### DIMENSIONAL DATA















# SURFACE MOUNT KIT DIMENSIONS (ORDER SEPARATELY)

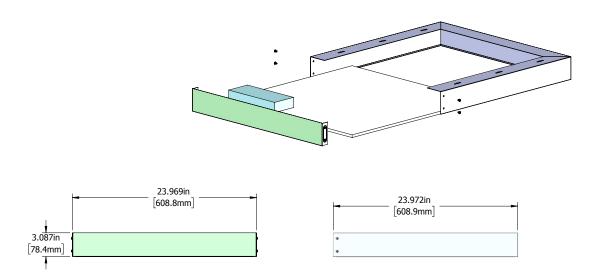

## ORDERING GUIDE

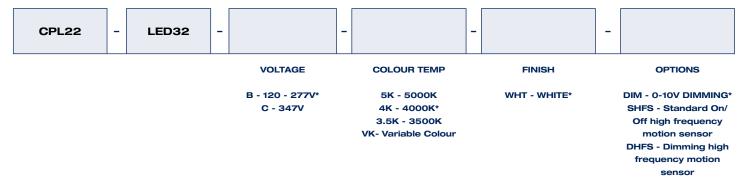

<sup>\*</sup> Standard configuration