

Marine Products

50 Ampere, 125/250V AC

3 Pole 4 Wire

Ship-to-Shore Devices



Plugs and receptacles only.



50A 125/250V



HBL63CM65



HBL77CM16



HBL63CM69



HBL77CM74WO



S750



HBL61CM52
HBL61CM52W
HBL61CM42
HBL61CM42W


50A 125/250V AC Ship-to-Shore Devices

Description	Catalog Numbers
50' (15.2m) yellow vinyl jacketed shore power cable set, #6 AWG type STOW is completely factory pre-wired with molded-on devices. The connector end has a metallic threaded sealing ring for making the inlet/connector interface watertight. IP56 SUITABILITY (BOATSIDE).	HBL61CM52
Same as #HBL61CM52, except white. IP56 SUITABILITY (BOATSIDE).	HBL61CM52W
25' (15.2m) yellow vinyl jacketed shore power cable set, #6 AWG type STOW is completely factory pre-wired with molded-on devices. The connector end has a metallic threaded sealing ring for making the inlet/connector interface watertight. IP56 SUITABILITY (BOATSIDE).	HBL61CM42
Same as #HBL61CM42, except white. IP56 SUITABILITY (BOATSIDE).	HBL61CM42W
Four conductor, #6 AWG type STOW, yellow PVC jacketed portable cord with jute fillers for added flexibility is ideal for making cable sets, extension cords, and adapters that will not mark the boats deck. Available in 250' (76.2m) lengths only.	YC406250*
Nickel plated brass plug has a heat resistant thermost interior and combination metal and rubber cord grip, which provides superior strain relief capability. Cord grip range is .437"-1.140" (11.1-29.0). IP20 SUITABILITY.	HBL63CM65
Yellow Seal-Tite® cover for weatherproofing 50A plugs. IP55 SUITABILITY.	HBL77CM16+
White Seal-Tite® cover for weatherproofing 50A plugs. IP55 SUITABILITY.	HBL77CM16W*+
Single receptacle has a heat resistant thermost base. IP20 SUITABILITY.	HBL63CM69
Yellow Valox® lift cover plate for weatherproofing 50A receptacles. Meets requirements of the most stringent of UL's three listing categories for weatherproof plates. Stainless steel screws and a neoprene gasket included. For mounting to FS/FD type weatherproof boxes. IP44 SUITABILITY.	HBL77CM74WO
Same as #HBL77CM74WO except gray in color. IP44 SUITABILITY.	HBL7774WO
Stainless steel wall plate for 50A receptacle.	S750

*Not shown.

+ Boots are not UL listable.

50A Molded Cable Sets

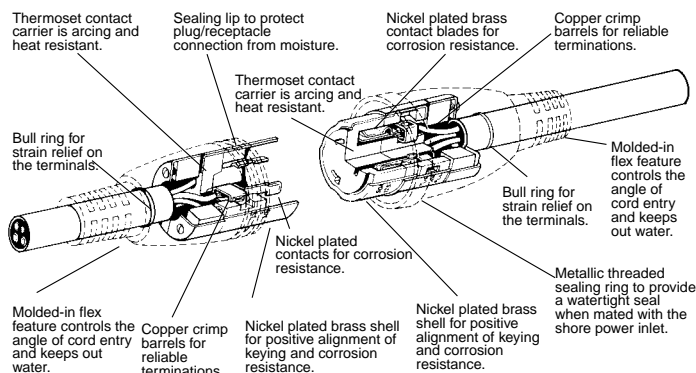

Valox® is a registered trademark of General Electric Company.

