



Passive Infrared Wall Switches

- Passive infrared technology
- Manual adjustment time delay (20 sec. to 30 min.)
- Photocell (WS2000xx)
- Wallplate included
- No neutral required
- cULus, CEC Title 24 Certified

Description	Color	w/ Neutral	w/ Nightlight and Neutral	Standard	w/ Nightlight
Manual adjusting; selectable manual/auto-on operation; dual-voltage 120/277V; 3-way capable.	Gray	—	—	WS2000GY	WS2000NGY
	Ivory	WS2004I	WS2004NI	WS2000I	WS2000NI
	Light Almond	—	—	WS2000LA	WS2000NLA
	White	WS2004W	WS2004NW	WS2000W	WS2000NW
Manual adjusting; auto-on operation; 120V AC only.	Ivory	—	—	WS1000I	WS1000NI
	White	—	—	WS1000W	WS1000NW
Manual adjusting; Manual-on operation; 120V AC only.	Ivory	—	—	WS1001I	WS1001NI
	White	—	—	WS1001W	WS1001NW



WS2000W



WS1000W

Dimming Control Sensors

Description	Color	Standard	w/ Nightlight
Occupancy sensor, 500W 120V AC, 150° view, single pole switch, incandescent only.	Ivory	RMS121I	RMS121ILI
	Light Almond	RMS121LA	RMS121ILLA
	White	RMS121W	RMS121ILW
Vacancy sensor, 500W 120V AC, 150° view, single pole switch, incandescent only.	Ivory	RMS120I	RMS120ILI
	Light Almond	RMS120LA	RMS120ILLA
	White	RMS120W	RMS120ILW



RMS121ILW
RMS120ILW


Digital Timer Wall Switch

Description	Color	120V AC	277V AC	Catalog Number
Dip switch enabled preset intervals. User adjustable up to 4 hours, 3-way capable. Includes an on/off momentary push button switch feature.	White	960W	1200W	DT2000W



DT2000W

Coverage for Occupancy and Vacancy Sensors

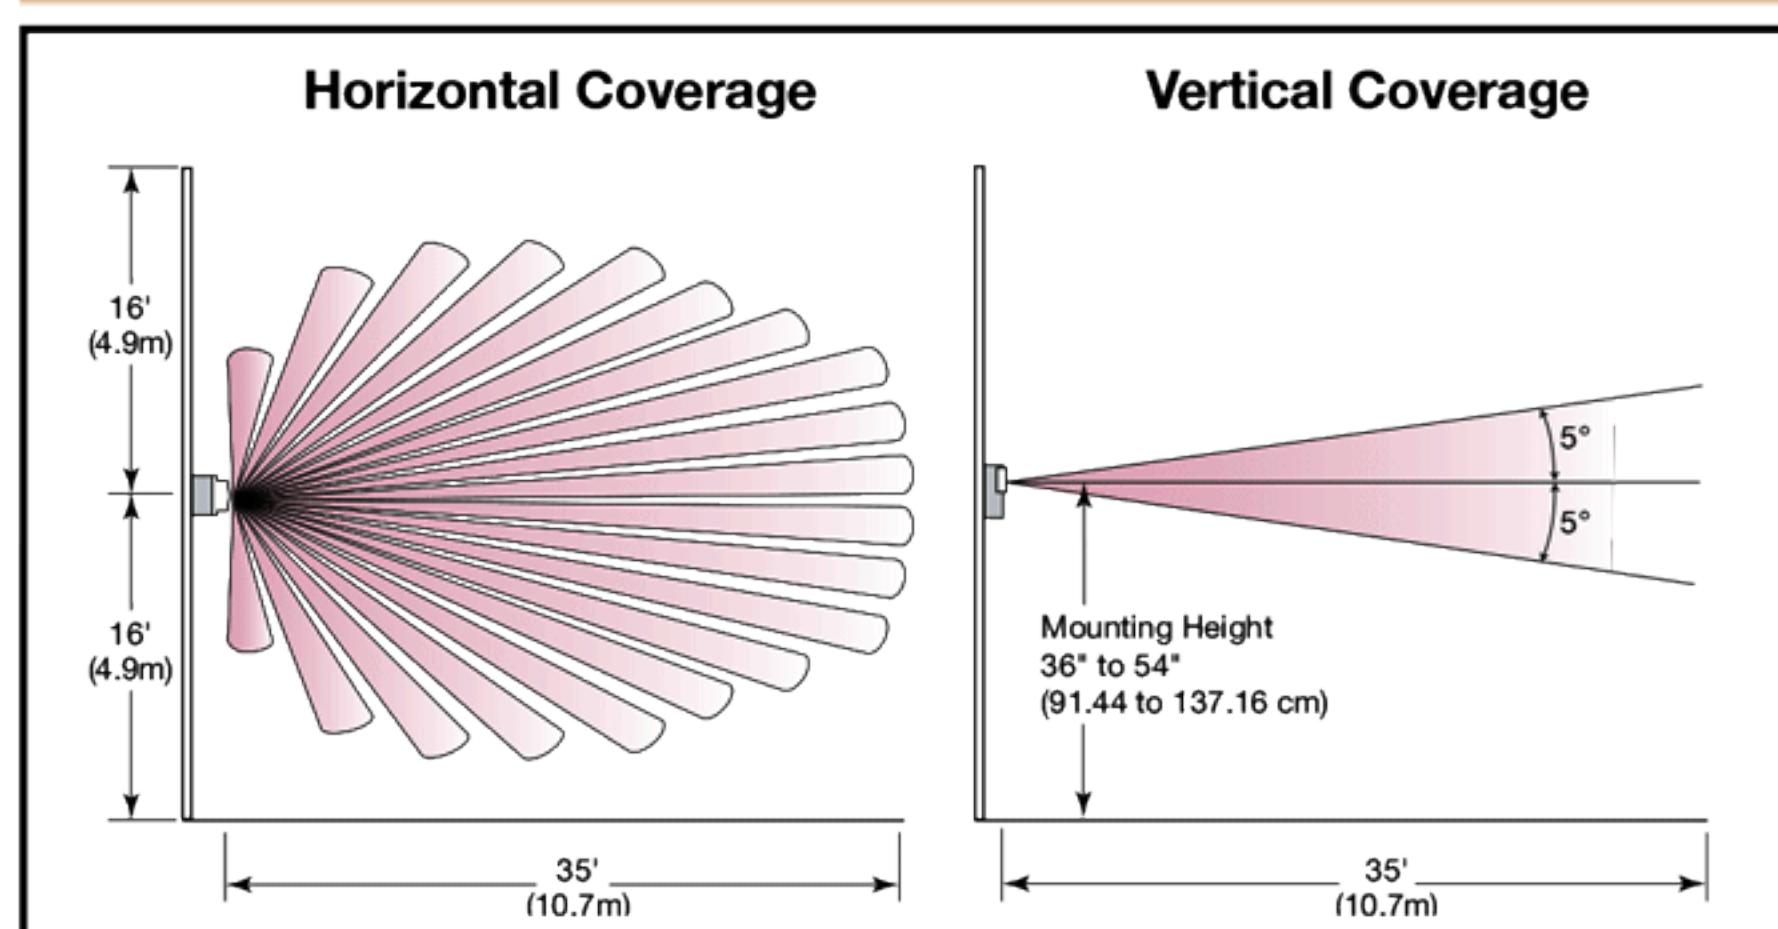

Coverage for Heavy Duty Occupancy and Vacancy Sensors

