



SINGLE GANG DEVICE BOXES

APPLICATION


Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES


- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



1100-LUBAR



1100-LLEUBAR




1100-LREU



1102BAR




1102-LUBAR




1102-LHUBAR



1102-LREU



1102-MSB



1102-MSBU



1102-SB

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 1-1/2" Deep - Gangable					
1100-LUBAR	8.0	-	Flush	-	U
1100-LLEUBAR	8.0	-	-	-	U
1100-LREU	8.0	-	Recessed	-	U
2" x 3" Device Box - 2" Deep - Gangable					
1102BAR	10.0	-	Recessed	1/2" (4)	U
1102-LUBAR	10.0	-	Flush	-	U
1102-LHUBAR	10.0	-	-	-	U
1102-LREU	10.0	-	Recessed	-	U
1102-MSB	10.0	MSBS	-	1/2" (4)	-
1102-MSBU	10.0	MSBS	-	-	U
1102-SB	10.0	SB	-	1/2" (4)	-




APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction

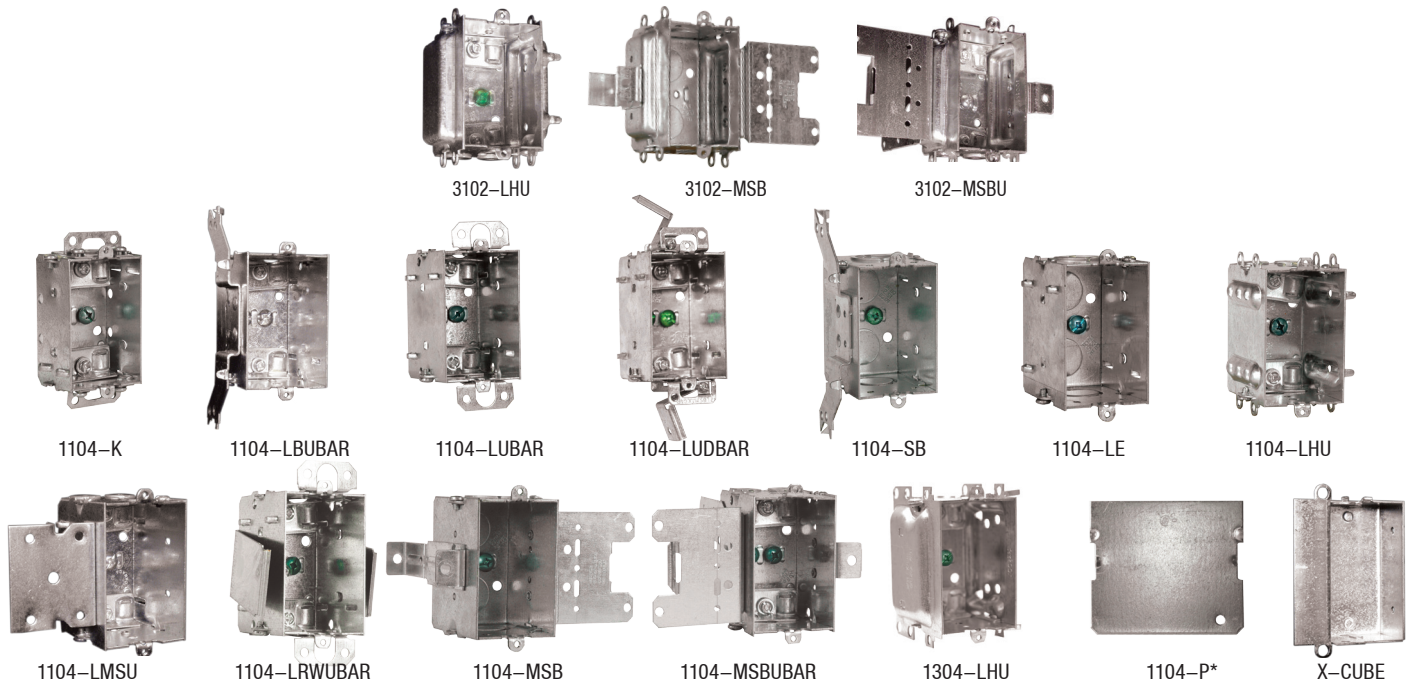

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2" Deep - Gangable					
3102-LHU	12.0	-	-	-	U
3102-MSB	12.0	MSBS	-	1/2" (4)	-
3102-MSBU	12.0	MSBS	-	-	U
2" x 3" Device Box - 2-1/2" Deep - Gangable					
1104-K	12.5	-	Recessed	K(2), 1/2"(2)	-
1104-LBUBAR	12.5	-	-	-	U
1104-LUBAR	12.5	-	Flush	-	U
1104-LUDBAR	12.5	Rework	Flush	-	U
1104-SB	12.5	SB	-	K(2), 1/2"(2)	-
1104-LE	12.5	-	-	K(2), 1/2"(2)	-
1104-LHU	12.5	-	-	-	U
1104-LMSU	12.5	MS	-	-	U
1104-LRWUBAR	12.5	RW	Flush	-	U
1104-MSB	12.5	MSB	-	K(2), 1/2"(2)	-
1104-MSBUBAR	12.5	MSB	-	-	U
1304-LHU	14.5	-	-	-	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
X-CUBE	Adds 5.5 Cu. In. For use with 1104 series metal boxes				

*Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources WITHIN THE SAME BOX



SINGLE GANG DEVICE BOXES

APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



2104-LU



2104-LLEUBAR



2104-LNU



2104-MSBU



EZ-101BAR



KIT-201



2304-LLEU



1504-LLEUBAR



1504-MSBUBAR



1804-LHU



3104-LHU



3104-MSB



3104-MSBU

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x3" Device Box - 2-1/2" Deep					
2104-LU	12.5	-	Flush	-	U
2104-LLEUBAR	12.5	-	-	-	U
2104-LNU	12.5	-	-	-	U
2104-MSBU	12.5	MSB	-	-	U
EZ-101BAR	12.5	-	Flush	1/2" (1)	U
KIT-201	12.5	Contains: One 2104LU & One pair of 820-D F-brackets			
2304-LLEU	14.5	-	-	-	U
1504-LLEUBAR	15.0	-	-	-	U
1504-MSBUBAR	15.0	MSB	-	-	U
1804-LHU	16.0	-	-	-	U
3104-LHU	16.0	-	-	-	U
3104-MSB	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSB-1*	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSBU	16.0	MSB	-	-	U
3104-MSBU-1*	16.0	MSB	-	-	U

* Brackets set back for two layers of 1/2" drywall

