

DIGITAL NAVIGATION

[Ordering Tree](#) [nLight Platform](#) [Sensor Switch JOT](#) [Photometrics](#) [Performance Data](#)

FEATURES & SPECIFICATIONS

INTENDED USE — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/8") also makes it an excellent choice for renovation projects.

CONSTRUCTION — Prior to fabrication, BLT components are coated with a proprietary paint blend and die-formed for dimensional consistency.

The BLT reflector is available in both smooth and ribbed finishes. Choose RB from the fixture style section below for a ribbed finish.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability.

LED boards and drivers are accessible from the plenum.

OPTICS — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces – rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with ribbed or a smooth frosted finish.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000). Color Variation within 3-step MacAdam ellipse (3SDCM).

Non-Configurable BLT: Generic 0-10 volt dimming driver. Dims to 10%

Configurable BLT: available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless RIO, RES7 sensors, or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission. nLight AIR is commissioned easily through an intuitive mobile app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

SENSOR — Integrated sensor (individual control): Sensor Switch MSD7ADCX ((Passive infrared (PIR)) or MSDPDT7ADCX (PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

Integrated Smart Sensor (nLight Air Wireless Platform): The RES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLARITY, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

Integrated Wireless Sensor (single room control): Sensor Switch VERTEX JOT or JOTVTX15 luminaire-embedded occupancy and ambient light sensor allows the luminaire to power off when the space is unoccupied or when enough ambient light is entering the space. See page X for more details on the integrated wireless sensor.

INSTALLATION — The BLT's low profile design of only 2-3/8" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

BUY AMERICAN — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

BLT Series LED

2BLT4

2' x 4'
LED



ADP Diffuser Option



Ribbed Reflector Option



eldoLED



Specifications


Length: 47-3/4 (121.2)

Width: 23-3/4 (60.3)

Depth: 2-3/8 (6.0)

Depth with Air supply/return: 2-3/4 (6.9)

All dimensions are inches (centimeters) unless otherwise specified.

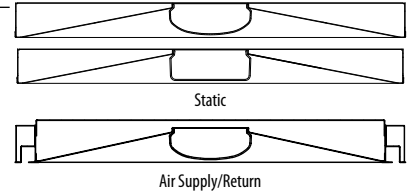

Embed nLight controls today. Prepare for tomorrow.

Now

- User-friendly install
- Enhanced energy savings
- Code compliance

Tomorrow

- Scalability
- Space configuration
- Future-ready

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

2BLT Volumetric Recessed Lighting 2'x4'



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2BLT4 40L ADP EZ1 LP840

2BLT4		Air function		Lumens ‡		Diffuser		Voltage		Driver		Color temperature									
Series	Fixture Style																				
2BLT4 2x4 BLT	(blank) Smooth Reflector RB Ribbed Reflector	(blank) A	Static Air supply/return ‡	Standard efficiency (>100 LPW)	High efficiency (>130 LPW)	ADP Curved, ribbed	ADSM Curved, smooth	(blank) MVOLT	EZ1 eldoLED dims to 1% (0-10 volt dimming) ‡	LP830 82CRI, 3000 K	LP835 82CRI, 3500 K	LP840 82CRI, 4000 K	LP850 82CRI, 5000 K								
														30L 3000	30LHE 3000	277 277V	GZ1 Dims to 1% (0-10V dimming) ‡	LP930 90CRI, 3000K	LP935 90CRI, 3500K	LP940 90CRI, 4000K	LP950 90CRI, 5000K
														40L 4000	40LHE 4000	347 347V ‡					
														48L 4800	48LHE 4800						
														60L 6000	60LHE 6000						
														72L 7200	72LHE 7200						
														85L 8500	85LHE 8500						
														100L 10000							
														120L 12000							

nLight Interface	Control ‡	Individual Control
nLight Wired (blank) no nLight® interface N80 nLight with 80% lumen management N80EMG nLight with 80% lumen management For use with generator supply EM power ‡ N100 nLight without lumen management N100EMG nLight without lumen management For use with generator supply EM power ‡ nLight Wireless (blank) no nLight® interface NLTAIR2 nLight AIR Generation 2 enabled ‡	nLight Wired ‡ (blank) No sensor control NES7 nLight™ nES 7 PIR integral occupancy sensor NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell nLight Wireless RES7 nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities RES7PDT nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell RIO nLight AIR radio module without sensor RES7EM nLight AIR PIR integral occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection ‡ RES7PDTEM nLight AIR microphonics dual technology occupancy sensor with automatic dimming photocell and UL924 Emergency Operation, via power interrupt detection ‡ RIOEM nLight AIR radio module less sensor, with UL924 Emergency Operation, via power interrupt detection ‡	Individual Control MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell ‡ MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell ‡ JOT Wireless room control with "Just One Touch" pairing ‡ JOTVTX15 Wireless occupancy sensor with "Just One Touch" pairing ‡

Standby Mode	Options
NOC NOC Occupancy sensor disabled ‡	BDP Disconnect Plug EL7L 700 lumen battery pack (Noncompliant with CA T20) ‡ EL14L 1400 lumen battery pack (Noncompliant with CA T20) ‡ EL14LSD 1400 lumen battery pack with self-diagnostic testing feature (Noncompliant with CA T20) ‡ E10WLCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS ‡ CP Chicago plenum ‡ BGTD Bodine Generator Transfer Device ‡ PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge ‡ PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage wires ‡ GLR Fast-blowing fuse ‡ GMF Slow-blowing fuse ‡ NPLT Narrow pallet RRL_ RELOC®-ready luminaire ‡ LATC Earthquake clip DWAM Anti-Microbial paint JP14 Job packaging ‡ JP18 Job packaging ‡ IPSX Gasketed diffuser compartment to meet IP5X rating ‡ BAA Buy America(n) Act Compliant

NOTE: ‡ indicates option value has ordering restrictions. Please reference the Option Value Ordering Restrictions chart on the next page. Options are sorted alphanumericly.

2BLT Volumetric Recessed Lighting 2'x4'

‡ Option Value Ordering Restrictions

Option value	Restriction
347	Not available with SLD, EL7L, EL14L, or E10WLCP options.
A	Not available with RB fixture style, consult factory for air flow data.
BGTD	Not available with TD, JOT, JOTVTX15 sensor options or emergency battery options. Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options. Example: BGTD BSE10.
Controls	Must specify diffuser with trim rings.
CP	Not available with N80, N80EMG, N100, or N100EMG.
GZ1, GZ10	Not available with any Control or Sensor options except JOT & JOTVTX15
EL14LSD, E10WLCP, EL7L, EL14L	When using pre-wire option, use PWS1846 or PWS1846 PWSLV. For more information, please see the PSSD2 specification sheet .
FAO	EZ1 driver required. Not available with USPOM, FAO or lumen packages > 6000LM. FAO restricts use of external Dimming controls. See chart on page 3 for additional details.
GLR, GMF	Must specify voltage. 120 or 277, with GLR and GMF fusing.
IP5X	Not available with air supply/return or Wired Networking (NES_) and Individual Control (MSD_) sensors.
JOT, JOTVTX15	Not available with standard efficiency 85L, 100L or 120L lumen options. Not available with SLD, nLight, NLTAIR2, NOC, or BGTD options.
JP14	Only available on fixtures with NES7, NESPDT7, NESPDT7ADCX, MSD7ADCX, MSPDPT7ADCX, RES7, RES7PDT, RIO, JOT, JOTVTX15. Not available when air supply/return function and sensor options are combined.
JP18	Not available with option: NES7, NESPDT7, NESPDT7ADCX, MSD7ADCX, MSPDPT7ADCX, RES7, RES7PDT, RIO, JOT, JOTVTX15.
Lumens	Approximate lumen output. For high Efficiency, all versions may not achieve 130+ LPW. Refer to photometry on www.acuitybrands.com . Air supply/return option, 90 CRI, and versions with integral sensor trim rings may not achieve 130 LPW.
MSD7ADCX, MSPDPT7ADCX	Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
NES7, NESPDT7, NES7ADCX, NESPDT7ADCX	Requires N80, N80EMG, N100, or N100EMG. Only available with EZ1 driver.
NLTAIR2	Must order with nLight Wireless option from Control section. Only available with EZ1 driver. Not available with 85L, 100L, or 120L options.
NOC	Can only be ordered in conjunction with EZ1, NLTAIR2, RES7/RES7PDT. Occupancy sensor disabled at factory but can be re-enabled upon commissioning.
N80EMG, N100EMG	nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
RES7EM, RES7PDTEM, RIOEM	See UL924 Sequence of Operation chart on page 4. Not available with 72L, 72LHE, or 85LHE lumen packages.
RRL	For ordering logic consult: RRL_2013 .
SLD	Not available with with any nLight Interface or Control options.

Multiple Diffuser Options



ADP
Curved Ribbed



ADSM
Curved Smooth



SDP
Square Ribbed



SDSM
Square Smooth



SDSM Diffuser Option


2BLT Volumetric Recessed Lighting 2'x4'

Non-Configurable BLT

Non-Configurable BLT								
Stock/MTO	Catalog Description *	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	2BLT4 40L ADP LP835	00190887470789	4000	31.69	126.22	3500K/82 CRI	120-277	28
	2BLT4 40L ADP LP840	00190887470765	4063	31.69	128.23	4000K/82CRI	120-277	28
	2BLT4 46L ADP LP835	00190887468656	4960	38	130.5	3500K/82 CRI	120-277	28
	2BLT4 46L ADP LP840	00190887468649	5039.18	38	132.58	4000K/82CRI	120-277	28
	2BLT4 40L ADP EL14L LP835	00190887470925	4000	31.69	126.22	3500K/82 CRI	120-277	28
	2BLT4 40L ADP EL14L LP840	00190887470918	4063	31.69	128.23	4000K/82 CRI	120-277	28
	2BLT4 46L ADP EL14L LP835	00190887468670	4960	38	130.5	3500K/82 CRI	120-277	28
	2BLT4 46L ADP EL14L LP840	00190887468663	5039.18	38	132.58	4000K/82 CRI	120-277	28

*Generic 0-10V Dimming to 10%.

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1" and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*



*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 24-3/4" (Tolerance is +1/8", -0").

UL924 Sequence of Operation

For 90 minutes following any complete AC power interruption >200 ms:

- Digital dimming is commanded to high end trim level.
- Device ignores wireless lighting control commands.

Accessories & Replacement Parts

Accessories: Order as separate catalog number.	
DGA24	Drywall grid adapter for 2x4 recessed fixture
2X4SMKSH PAF	Surface Mount Troffer Kit Post Paint
RK8BDP 2P U	Disconnect Plug (BDP), 2 Pole, Package of 1
RK8BDP 3P U	Disconnect Plug (BDP), 3 Pole, Package of 1
RK8BDP 2P J10	Disconnect Plug (BDP), 2 Pole, Package of 10
RK8BDP 2P J40	Disconnect Plug (BDP), 2 Pole, Package of 40

Replacement Parts: Order as separate catalog number.		
*249P2N	2DBLT48 ADP LENS ASSEMBLY	4 ft. replacement lens
*249P2T	2DBLT48 SDP LENS ASSEMBLY	4 ft. replacement lens
*249P30	2DBLT48 ADSM LENS ASSEMBLY	4 ft. replacement lens
*249P33	2DBLT48 SDSM LENS ASSEMBLY	4 ft. replacement lens
*237LT2	2DBLT48 ADPT LENS ASSEMBLY	4 ft. replacement lens
*237LT4	2DBLT48 SDPT LENS ASSEMBLY	4 ft. replacement lens
*237LT6	2DBLT48 ADSMT LENS ASSEMBLY	4 ft. replacement lens
*237LT8	2DBLT48 SDSMT LENS ASSEMBLY	4 ft. replacement lens
*237LTA	2DBLT48 ADPT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M52	2DBLT48 SDPT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M5A	2DBLT48 ADSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M5L	2DBLT48 SDSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens


JOT Wireless



Sensor Switch JOT Enabled Wireless Solution

Designed with contractors in mind, the Sensor Switch JOT enabled wireless solution offers a straightforward approach to the installation and pairing of lighting fixtures and controls. Absolutely no 0-10V control wires and no mobile apps are needed with JOT enabled products, allowing for lightning speed installation right out of the box.

- 1. Power:** Install JOT enabled fixtures and controls as instructed.
- 2. Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
- 3. Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

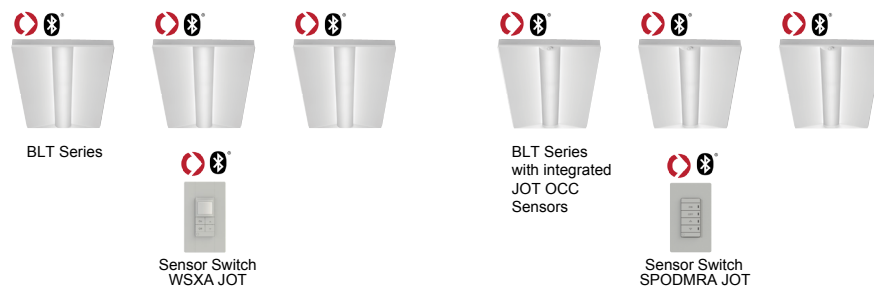

2BLT Volumetric Recessed Lighting 2'x4'

nLight Platform

nLight embedded fixtures offer:	Customers get:
Manual Dimming	Convenience and visual comfort for occupants
Motion Sensing and/or Daylight Harvesting	Energy savings and code compliance
Fixture or Group Level Control	Ability to configure lighting to the space requirements
Flexibility	Ease of fixture moves, adds and changes
Wireless Wall Switch (nLight AIR Only)	Ease and flexibility of placement
Astronomical and Time of Day Scheduling	Energy savings and building security
Scalable Solution	nLight controls to grow with your business
Future-Ready	nLight platform to set foundation for future upgrades and capabilities

nLight Air Wireless



Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



nLight Wired Networking



Simple as 1,2,3

1. Install the nLight® Wired fixtures with embedded control
2. Install the nLight Wired wall switch
3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)




2BLT Volumetric Recessed Lighting 2'x4'

Sensor Options					
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking	nLight AIR Networking
		PIR	PDT		
MSD7ADCX	X	X			
MSDPDT7ADCX	X		X		
NES7		X		X	
NES7ADCX	X	X		X	
NESPD7			X	X	
NESPD7ADCX	X		X	X	
RES7	X	X			X
RESPDT7	X	X	X		X

Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

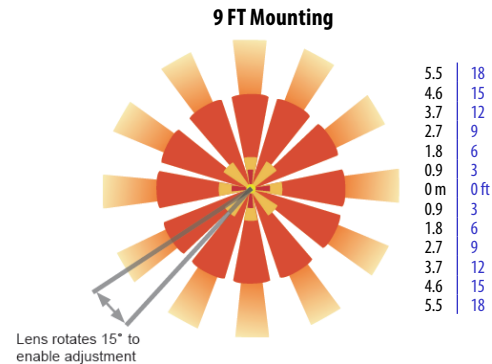

Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.

The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.


nLight AIR Wireless

nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

nLight Wired Networking


The nES7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the nES7ADCX includes an integrated photocell, which enables daylight harvesting controls. For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the nESPD7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

Sequence of Operation (MSD7 Sensor)

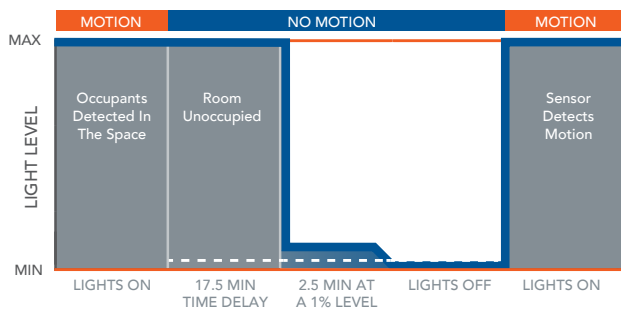

*The presetting on the automatic dimming photocell is 5fc.

Sequence of Operation (nES7 and rES7 and Sensor)

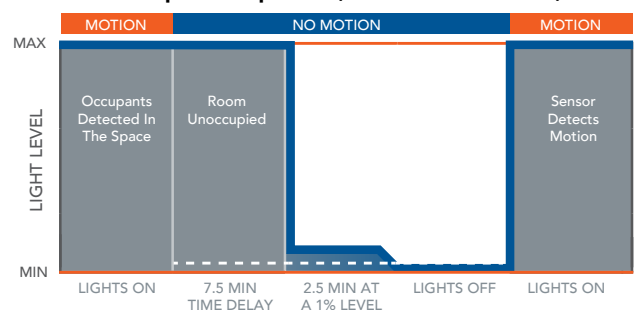

*The presetting on the automatic dimming photocell is 5fc (NES7) and 10fc (RES7).

2BLT Volumetric Recessed Lighting 2'x4'

Controls Accessories

nLight® Wired Control Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight.


WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODMA [Color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODMA DX [Color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD TOUCH [Color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CAT5 10FT J1
		30' cable	CAT5 30FT J1

nLight® AIR Control Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair.

Wall switches	Model number
On/Off single pole	rPODBA [color] G2
On/Off two pole	rPODB A2P [color] G2
On/Off & raise/lower single pole	rPODBA DX [color] G2
On/Off & raise/lower two pole	rPODBA 2P DX [color] G2

BLT fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

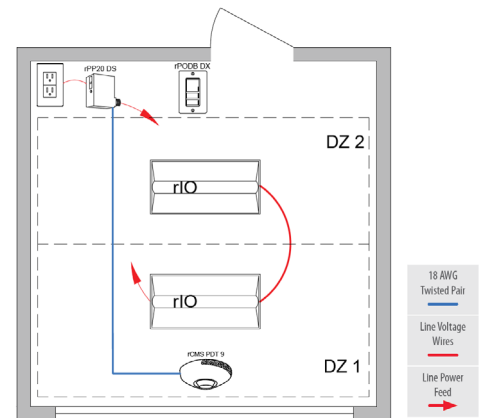

rCMS ¹		Example: RCMS PDT 10 AR G2							
Series / Detection	Power Supply ¹	Occupancy Detection		Lens (Required)		Operating Mode		Generation	
RCMS nLight AIR occupancy and daylight sensor	[blank] Power Supply ordered separately PS 150 Standard 150 mA Power Supply	[blank] PDT	PIR Detection Dual Tech PIR/ Microphonics	10 Large Motion/ Extended Range 360°	9 Small Motion/ Extended Range 360°	6 High Bay 360° Lens	[BLANK] None AR Auxiliary Relay	G2	Generation 2 compatibility

Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



Sensor Switch
WSX




nLight WIRED
NPOD UNITOUCH



nLight WIRED
nPODMA DX



nLight AIR
rPODBA



BLT with rIO



rPODBA




rCMS

2BLT Volumetric Recessed Lighting 2'x4'


Constant Lumen Management

Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

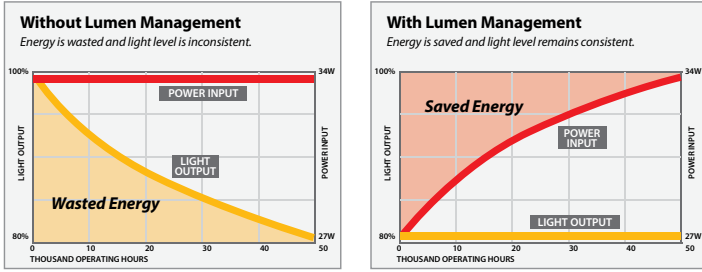


PHOTOMETRICS

2BLT4 40L ADP LP835, 4000 delivered lumens, test no. ISF36900P109, tested in accordance to IESNA LM-79

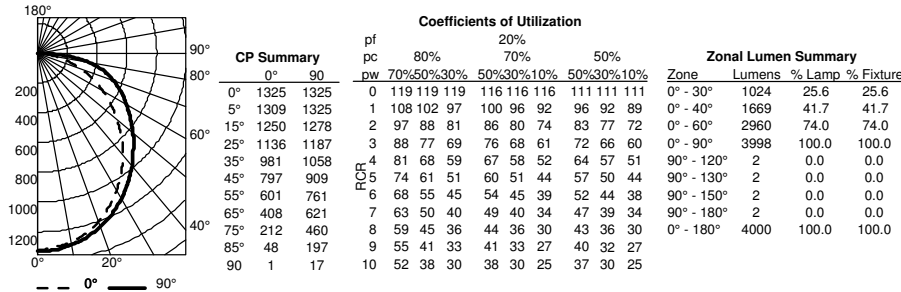

2BLT4 48L ADP LP835, 4960 delivered lumens, test no. ISF 36900P117, tested in accordance to IESNA LM-79

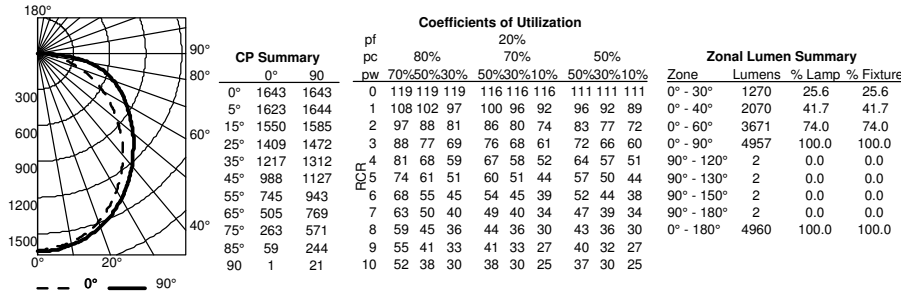

2BLT Volumetric Recessed Lighting 2'x4'

Performance Data					
Model Number	Lumens	LPW	Watts	DLC Listing	DLC ID
2BLT4 30L ADP E21 (GZ1, GZ10) LP835 [All Options]	2962	127.31	23.26	Premium	PWJDEMHS
2BLT4 30L ADP E21 (GZ1, GZ10) LP840 [All Options]	3009.28	129.34	23.26	Premium	P18J5GLD
2BLT4 30L ADPT E21 (GZ1, GZ10) LP840 [All Options]	2969.16	127.62	23.26	Premium	P3HB2XSG
2BLT4 40L ADP E21 (GZ1, GZ10) LP835 [All Options]	4000	126.22	31.69	Premium	PDWKYXFD
2BLT4 40L ADP E21 (GZ1, GZ10) LP840 [All Options]	4063.86	128.23	31.69	Premium	PEYXAZWD
2BLT4 40L ADPT E21 (GZ1, GZ10) LP835 [All Options]	3946.66	124.53	31.69	Premium	PS63CPK6
2BLT4 40L ADPT E21 (GZ1, GZ10) LP840 [All Options]	4009.67	126.52	31.69	Premium	PK79UR9W
2BLT4 48L ADP E21 (GZ1, GZ10) LP835 [All Options]	4960	130.5	38	Premium	PJ9CK6C1
2BLT4 48L ADP E21 (GZ1, GZ10) LP840 [All Options]	5039.18	132.58	38	Premium	P9W2R5AK
2BLT4 48L ADPT E21 (GZ1, GZ10) LP835 [All Options]	4893.86	128.76	38	Premium	PPFKZU3U
2BLT4 48L ADPT E21 (GZ1, GZ10) LP840 [All Options]	4971.99	130.82	38	Premium	PC8HMC9
2BLT4 60L ADP E21 (GZ1, GZ10) LP835 [All Options]	6016	126.39	47.59	Premium	PSJ6QERM
2BLT4 60L ADP E21 (GZ1, GZ10) LP840 [All Options]	6112.04	128.4	47.59	Premium	PVXQXUV
2BLT4 60L ADPT E21 (GZ1, GZ10) LP835 [All Options]	5935.78	124.7	47.59	Premium	PHT84BW4
2BLT4 60L ADPT E21 (GZ1, GZ10) LP840 [All Options]	6030.55	126.69	47.59	Premium	PXV55B8
2BLT4 72L ADP E21 (GZ10) LP840 [All Options]	7360.66	125.3	58.74	Premium	PSCZ22CB
2BLT4 72L ADP GZ1 LP835 [All Options]	7245	119.07	60.84	standard	PISHTCTS
2BLT4 72L ADP GZ1 LP840 [All Options]	7360.66	120.97	60.84	standard	PBERALG7
2BLT4 72L ADPT E21 (GZ1, GZ10) LP835 [All Options]	7148.4	117.48	60.84	standard	PDQS3CYK
2BLT4 72L ADPT E21 (GZ10) LP840 [All Options]	7262.52	123.63	58.74	Premium	P2KKMMVN
2BLT4 72L ADPT GZ1 LP840 [All Options]	7262.52	119.36	60.84	standard	P10DUPC0
2BLT4 85L ADP E21 (GZ1, GZ10) LP835 [All Options]	8567	116.43	73.58	standard	PYD2G06V
2BLT4 85L ADP E21 (GZ1, GZ10) LP840 [All Options]	8703.77	118.28	73.58	standard	P8Z4IV4X
2BLT4 85L ADPT E21 (GZ1, GZ10) LP835 [All Options]	8452.77	114.87	73.58	standard	PTZEW3QM
2BLT4 85L ADPT E21 (GZ1, GZ10) LP840 [All Options]	8587.72	116.71	73.58	standard	P01DMEK9
2BLT4 100L ADP E21 (GZ1, GZ10) LP835 [All Options]	9837	103.14	95.36	standard	PGDES20R
2BLT4 100L ADP E21 (GZ1, GZ10) LP840 [All Options]	9994.04	104.79	95.36	standard	P007CHGX
2BLT4 100L ADPT E21 (GZ1, GZ10) LP835 [All Options]	9705.84	101.77	95.36	standard	PSZUQY7M
2BLT4 100L ADPT E21 (GZ1, GZ10) LP840 [All Options]	9860.79	103.39	95.36	standard	P6V6X6HY
2BLT4 120L ADP E21 (GZ1, GZ10) LP835 [All Options]	11709	118.18	99.07	standard	PGM4Y7DP
2BLT4 120L ADP E21 (GZ1, GZ10) LP840 [All Options]	11895.9	120.07	99.07	standard	P00DDCG2
2BLT4 120L ADPT E21 (GZ1, GZ10) LP835 [All Options]	11552.9	116.61	99.07	standard	PXM0F509
2BLT4 120L ADPT E21 (GZ1, GZ10) LP840 [All Options]	11737.3	118.47	99.07	standard	PJ4GEBZM

DLC information is subject to change, for the most up-to-date information please refer to www.dlc.org. Above listings do not cover 347v or SLD.

HE Performance Data					
Model Number	Lumens	LPW	Watts	DLC Listing	DLC ID
2BLT4 30LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	3107	135.17	22.98	Premium	P7KEICW5
2BLT4 30LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	3156.6	137.33	22.98	Premium	PDOM06BH
2BLT4 30LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	3065.57	133.37	22.98	Premium	P7PZAJDZ
2BLT4 30LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	3114.51	135.5	22.98	Premium	P2N23EBP
2BLT4 40LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	4085	138.56	29.48	Premium	P67P6SSY
2BLT4 40LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	4150.21	140.77	29.48	Premium	P95UQD66
2BLT4 40LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	4030.53	136.71	29.48	Premium	PC15DQEC
2BLT4 40LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	4094.88	138.89	29.48	Premium	PGRC3J2T
2BLT4 48LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	4770	138.16	34.52	Premium	PXBJBN8
2BLT4 48LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	4846.15	140.37	34.52	Premium	P5PQ5RRX
2BLT4 48LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	4706.4	136.32	34.52	Premium	P2NK2H33
2BLT4 48LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	4781.53	138.5	34.52	Premium	PK8C1321
2BLT4 60LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	5894	135.12	43.61	Premium	PQZN176R
2BLT4 60LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	5988.09	137.28	43.61	Premium	PG5CYJUC
2BLT4 60LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	5815.41	133.32	43.61	Premium	PZ72TAWM
2BLT4 60LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	5908.25	135.45	43.61	Premium	PRC4W72B
2BLT4 72LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	7149	135.94	52.58	Premium	PUB38GEQ
2BLT4 72LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	7263.13	138.11	52.58	Premium	P7GDHZTN
2BLT4 72LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	7053.68	134.12	52.58	Premium	P5CC2VKV
2BLT4 72LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	7166.29	136.26	52.58	Premium	P6P1BKDM
2BLT4 85LHE ADP E21 (GZ1, GZ10) LP835 [All Options]	8158	128.96	63.25	Premium	PRTW6BXW
2BLT4 85LHE ADP E21 (GZ1, GZ10) LP840 [All Options]	8288.24	131.02	63.25	Premium	P6H1V2D6
2BLT4 85LHE ADPT E21 (GZ1, GZ10) LP835 [All Options]	8049.22	127.24	63.25	Premium	P1VGSTA3
2BLT4 85LHE ADPT E21 (GZ1, GZ10) LP840 [All Options]	8177.73	129.27	63.25	Premium	PNSBKJ6E

DLC information is subject to change, for the most up-to-date information please refer to www.dlc.org. Above listings do not cover 347v or SLD.

How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet. LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.