


Quick-connect XT Lighting Contactor will save you time and money!

XT Lighting Contactor Plug and Play with 22 mm cover control kit options


For customers looking to save both time and money, Eaton offers the XT Lighting Contactor Plug and Play series of enclosed control products. This industrial design is available up to 79A @600Vac with M22 cover control kits as options. This design includes an industrial grade lighting contactor made up of quickconnect components that can be field installed, eliminating the need to order engineered assemblies from the factory. All components come with pre-wired harnesses and interlocking mated plugs that can be easily snapped together on an efficient bracket, preventing confusing control wiring and reducing assembly time. The XT Lighting Contactor Plug and Play, with its simple design and installation, provides for a flexible and efficient solution designed to fit the needs of our customer.

XT Lighting Contactor Plug and Play available with M22 series of 120Vac and 24Vac cover control kit options

For customers looking for an integrated and convenient cover control design, Eaton offers our standard 22 mm kit designs. These kits allow simple removal of the front enclosure cover (no plug connections to remove) and can accommodate our traditional design. These operator interface kit assemblies make use of the M22 series of selector switches, pushbuttons, LED pilot lights, providing greater versatility for control and indication.

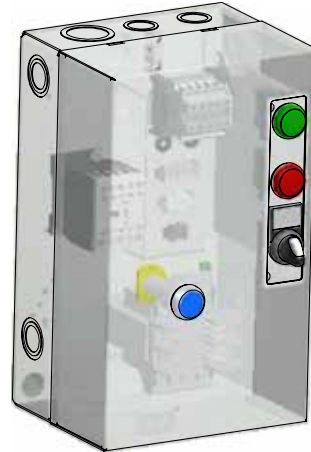

EEMAC 1

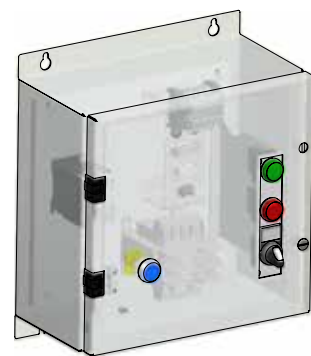

EEMAC 12/3R

XT Lighting Contactor Plug and Play features:

- Compact and robust design for ease of mounting
- Quick and easy component assembly
- Choose from 19 different cover control options
- Available up to 79A @ 600Vac
- Optional remote cover control kits
- EEMAC 1/12/3R rated enclosure
- CSA and cCSAus approved

XT Lighting Contactor Plug and Play


Contactor Assembly

UL/CSA Special Purpose Rating

Lighting Amps @ 40° C Ballast 600V Max.	Lighting Amps @ 40° C Tungsten 600V Max.	600V Resistive Load	NEMA 1, 12, 3R Enclosed Contactor Cat #	Enclosure NEMA 1, 12, 3R	Frame Size	Enclosure Dimensions (WxHxD)	Control Voltage
20	14	20	EPPXT05B1	1	B	7.73x12.60x6.00	120 Vac
40	40	40	EPPXT05C1	1	C	7.73x12.60x6.00	120 Vac
79	74	79	EPPXT05D1	1	D	7.73x12.60x6.00	120 Vac
20	14	20	EPPXT05E1T	1	B	7.73x12.60x6.00	24 Vac
40	40	40	EPPXT05H1T	1	C	7.73x12.60x6.00	24 Vac
79	74	79	EPPXT05K1T	1	D	7.73x12.60x6.00	24 Vac
20	14	20	EPPXT05E	12/3R	B	12.5x14x6.62	120 Vac
40	40	40	EPPXT05H	12/3R	C	12.5x14x6.62	120 Vac
79	74	79	EPPXT05K	12/3R	D	12.5x14x6.62	120 Vac
20	14	20	EPPXT05ET	12/3R	B	12.5x14x6.62	24 Vac
40	40	40	EPPXT05HT	12/3R	C	12.5x14x6.62	24 Vac
79	74	79	EPPXT05KT	12/3R	D	12.5x14x6.62	24 Vac

Auxiliary Contacts

Contact Configuration	Selection
Frame B-C	
1NO-1NC	XTCEXFAC11
2NO-2NC	XTCEXFAC22
Frame D	
1NO-1NC	XTCEXSBN11

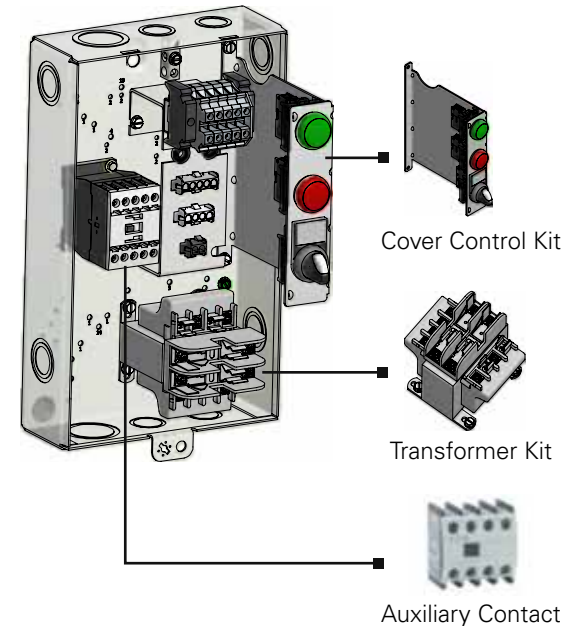

Transformer Kits and Separate Control Kits

Transformer Kits and Separate Control Kits	Catalogue Number	Secondary Voltage
Transformer Kit 347/120V (Primary Fused)	EPTX347P	120 Vac
Transformer Kit 208/120V (Primary Fused)	EPTX208P	120 Vac
Transformer Kit 240/120V (Primary Fused)	EPTX240P	120 Vac
Transformer Kit 480/120V (Primary Fused)	EPTX480P	120 Vac
Transformer Kit 600/120V (Primary Fused)	EPTX600P	120 Vac
Transformer Kit 208/24V (Primary Fused)	EPTX208PT	24 Vac
Transformer Kit 240/24V (Primary Fused)	EPTX240PT	24 Vac
Transformer Kit 480/24V (Primary Fused)	EPTX480PT	24 Vac
Transformer Kit 600/24V (Primary Fused)	EPTX600PT	24 Vac
Transformer Kit 120/24V (Primary Fused)	EPTX120PT	24 Vac
Separate Supply Control Kit (120V)	EP120P	120 Vac
Separate Supply Control Kit (24V)	EP24P	24 Vac

Colour Coded Step by Step Selection

- 1) Select the Contactor Assembly
- 2) Specify the Transformer Kit or Separate Control Kit
- 3) Choose the Cover Control or Remote Cover Control
- 4) Optional Auxiliary Contact Selection

Cover Control Options

Control Kit M22 (Frame)	Cat # 120V AC	Cat # 24V AC
Start/Stop Pushbutton	C600M1PP	C600M1PP
Start/Stop Pushbutton and Red Light	C600M101APP	C600M101TPP
Start/Stop Selector Switch	C600M13PP	C600M13PP
Start/Stop Selector Switch and Red Light	C600M131APP	C600M131TPP
Start/Stop Selector Switch and Red/Green Lights (B-C)	C600M132APP	C600M132TPP
Start/Stop Selector Switch and Red/Green Lights (D)	C600M132APPD	C600M132TPPD
HOA Selector Switch	C600M12PP	C600M12PP
HOA Selector Switch and Red Light	C600M121APP	C600M121TPP
HOA Selector Switch and Red/Green Lights (B-C)	C600M122APP	C600M122TPP
HOA Selector Switch and Red/Green Lights (D)	C600M122APPD	C600M122TPPD

Remote Cover Control Options

Description	Catalogue #
No Cover Control Kit NEMA 1	NOCOVERCONT
No Cover Control Kit NEMA 12/3R	EPPNOCOVER2
Start/Stop P.B. Remote Kit	M22GK1PXREM
Start/Stop S.S. Remote Kit	M22GK1XPBREM
HOA S.S. Remote Kit	M22GK3PREM

