

IQ 35M Fuse Pack Installation Instructions

IQ35M-FP1, IQ35M-FP2, IQ35M-FP3



IQ35M-FP3 (three-fuse kit) pictured here.
IQ35M-FP1 contains only one fuse;
IQ35M-FP2 contains two fuses.



HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Follow safe electrical work practices. See NFPA 70E in the USA, or applicable local codes.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Read, understand and follow the instructions before installing this product.
- Turn off all power supplying equipment before working on or inside the equipment.
- Any covers that may be displaced during the installation must be reinstalled before powering the unit.
- Use a properly rated voltage sensing device to confirm power is off.
DO NOT DEPEND ON THIS PRODUCT FOR VOLTAGE INDICATION

Failure to follow these instructions will result in death or serious injury.

NOTICE

- This product is not intended for life or safety applications.
- Do not install this product in hazardous or classified locations.
- The installer is responsible for conformance to all applicable codes.
- Mount this product inside a suitable fire and electrical enclosure.

Specifications


Fuse	0.5 Amp 600 V Slo-Blo, 200 kAIC, equivalent to Bussmann FNO-R-1/2
Wire	14 AWG, 18", 600 VAC

Installation

Disconnect power before installation.



1. Connect fuse to circuit as shown below. Fuse housing is labelled, showing which end must be connected to the load.
2. Fuses are replaceable. Use a 0.5 Amp 600 V Slo-Blo Bussman or equivalent. To replace, unscrew the fuse housing in the center, remove used fuse, and insert new fuse, with the flat end of the fuse entering the Load side of the fuse housing. Screw the housing back together, and restore power.

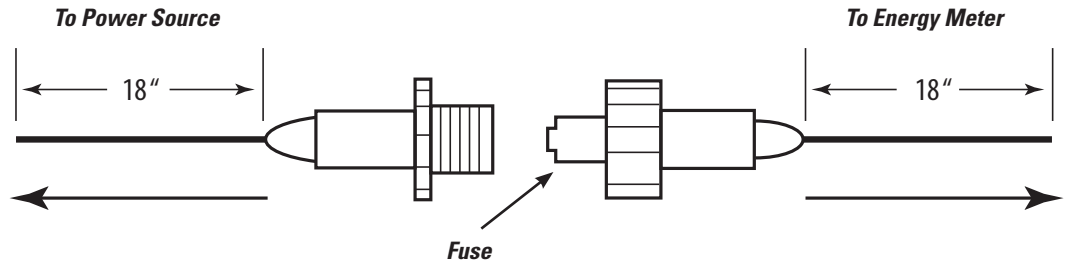

Eaton Corporation
 Electrical Sector
 1111 Superior Ave.
 Cleveland, OH 44114
 United States
 877-ETN-CARE (877-386-2273)
 Eaton.com

© 2011 Eaton Corporation
 All Rights Reserved
 Printed in USA
 Publication No. IB02601011E
 February 2011



Powering Business Worldwide



PowerChain Management is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.