



Nylon Wallplates


Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.




- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.


Nylon Wallplates

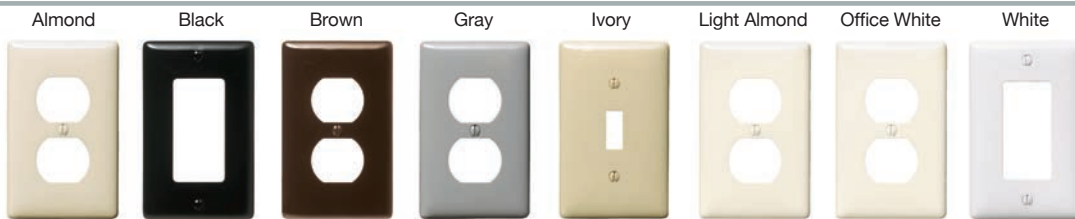

Nylon Pre-Marked Wallplates

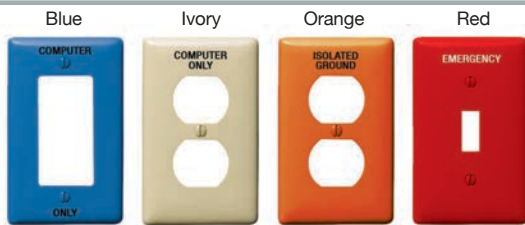

Metal Wallplates

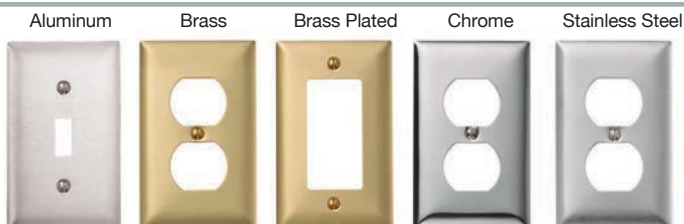








Pre-Marked





Combination Wallplates, 2-Gang

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
 2-Gang, 1-Toggle, 1-Single Receptacle 1.40 in. (35.6) Hole	Black	NP17BK	-	Aluminum	⓪
	Brown	NP17	-	Brass	⓪
	Gray	NP17GY	-	Brass Plated	⓪
	Ivory	NP17I	-	Chrome	⓪
	White	NP17W	-	S/S 302/304	SS17
				S/S 430	-
 2-Gang, 1-Toggle, 1-Blank, Box Mount	Black	NP113BK	-	Aluminum	⓪
	Brown	NP113	NPJ113	Brass	⓪
	Gray	NP113GY	-	Brass Plated	⓪
	Ivory	NP113I	NPJ113I	Chrome	⓪
	Light Almond	NP113LA	-	S/S 302/304	SS113
White	NP113W	-	S/S 430	-	
 2-Gang, 1-Toggle, 1-Blank, Strap Mount	Black	-	-	Aluminum	⓪
	Brown	-	-	Brass	⓪
	Gray	-	-	Brass Plated	⓪
	Ivory	-	-	Chrome	⓪
	Light Almond	-	-	S/S 302/304	SS114
White	-	-	S/S 430	-	
 2-Gang, 1-Blank, 1-Duplex, Box Mount	Black	NP138BK	-	Aluminum	⓪
	Brown	NP138	NPJ138	Brass	⓪
	Gray	NP138GY	-	Brass Plated	⓪
	Ivory	NP138I	NPJ138I	Chrome	⓪
	Light Almond	NP138LA	-	S/S 302/304	SS138
White	NP138W	NPJ138W	S/S 430	-	
 2-Gang, 1-Blank, 1-Duplex, Strap Mount	Black	-	-	Aluminum	⓪
	Brown	-	-	Brass	⓪
	Gray	-	-	Brass Plated	⓪
	Ivory	-	-	Chrome	⓪
	Light Almond	-	-	S/S 302/304	SS148
White	-	-	S/S 430	-	
 2-Gang, 1-Blank, 1-Decorator, Box Mount	Black	NP1326BK	NPJ1326BK	Aluminum	⓪
	Brown	NP1326	NPJ1326	Brass	⓪
	Gray	NP1326GY	NPJ1326GY	Brass Plated	⓪
	Ivory	NP1326I	NPJ1326I	Chrome	⓪
	Light Almond	NP1326LA	NPJ1326LA	S/S 302/304	SS1426*
White	NP1326W	NPJ1326W	S/S 430	-	
 2-Gang, 1-Telephone, .406 in. (10.3) Hole, 1-Blank, Strap Mount	Black	NP1214BK	-	Aluminum	-
	Brown	NP1214	-	Brass	-
	Gray	NP1214GY	-	Brass Plated	-
	Ivory	NP1214I	-	Chrome	-
	White	NP1214W	-	S/S 302/304	-
				S/S 430	-
 2-Gang, 1-Single Receptacle 1.40 in. (35.6) Hole 1-Blank, Strap Mount	Black	NP147BK	-	Aluminum	⓪
	Brown	NP147	-	Brass	⓪
	Gray	NP147GY	-	Brass Plated	⓪
	Ivory	NP147I	-	Chrome	⓪
	White	NP147W	-	S/S 302/304	⓪
				S/S 430	-

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

⓪ Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

*Strap Mount.



Specifications

Listings

Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.

Nylon Plate

Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.

302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass (70% Copper, 30% Zinc) Plate

Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.

Aluminum Plate

Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.

Chrome Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.


Steel Painted Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.




Product Dimensions


Size	Standard Metal		Painted Metal		Size	Jumbo Metal	
	Height	Width	Width	Width		Height	Width
1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)	6.38" (162.1)			
4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)	8.18" (207.8)			
5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)	10.00" (254.0)			
6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)	11.81" (300.0)			
7-Gang	4.50" (114.3)	13.68" (347.5)					
8-Gang	4.50" (114.3)	15.44" (392.1)					



Size	Standard Nylon		Size	Mid-Size Nylon	
	Height	Width		Height	Width
1-Gang	4.63" (117.6)	2.88" (73.2)	1-Gang	4.88" (124.0)	3.13" (79.5)
2-Gang	4.63" (117.6)	4.69" (119.1)	2-Gang	4.88" (124.0)	4.94" (125.4)
3-Gang	4.63" (117.6)	6.50" (165.1)	3-Gang	4.88" (124.0)	6.75" (171.5)
4-Gang	4.63" (117.6)	8.31" (211.1)	4-Gang	4.88" (124.0)	8.56" (217.4)
5-Gang	4.63" (117.6)	10.12" (256.1)			
6-Gang	4.63" (117.6)	11.93" (303.0)			




Size	Snap-On Nylon	
	Height	Width
1-Gang	4.68" (118.9)	2.94" (74.7)
2-Gang	4.68" (118.9)	4.75" (120.7)
3-Gang	4.68" (118.9)	6.56" (166.6)
4-Gang	4.68" (118.9)	8.37" (212.6)
5-Gang	4.68" (118.9)	10.18" (258.6)
6-Gang	4.68" (118.9)	11.99" (304.5)



Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical

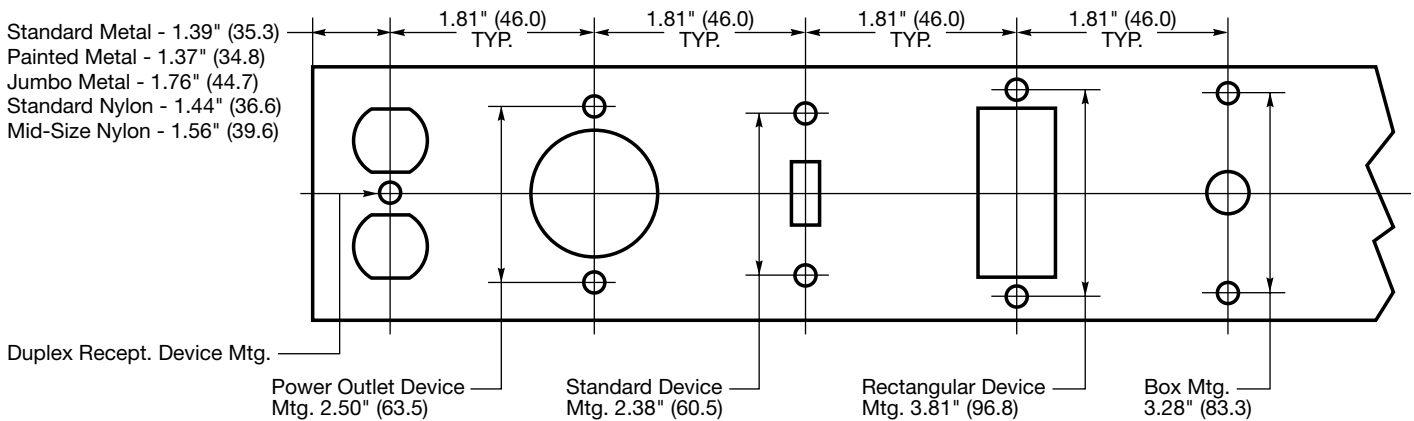

Note: Specifications are subject to change without notice.