SIEMENS

Data sheet 3RV2711-1FD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 5 A N release 65 A screw terminal Standard switching capacity

| product brand name | SIRIUS | |
|---|---|--|
| product designation | Circuit breaker | |
| design of the product | For system protection according to UL 489/CSA C22.2 No. 5 | |
| product type designation | 3RV2 | |
| General technical data | | |
| size of the circuit-breaker | S00 | |
| product extension auxiliary switch | Yes | |
| power loss [W] for rated value of the current | | |
| at AC in hot operating state | 7.25 W | |
| at AC in hot operating state per pole | 2.4 W | |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V | |
| surge voltage resistance rated value | 6 kV | |
| shock resistance according to IEC 60068-2-27 | 25 g / 11 ms (rectangular impulse and sine pulse) | |
| mechanical service life (operating cycles) | | |
| of the main contacts typical | 100 000 | |
| of auxiliary contacts typical | 100 000 | |
| electrical endurance (operating cycles) typical | 100 000 | |
| reference code according to IEC 81346-2 | Q | |
| Substance Prohibitance (Date) | 10/01/2009 | |
| SVHC substance name | Blei - 7439-92-1 | |
| Ambient conditions | | |
| installation altitude at height above sea level maximum | 2 000 m | |
| ambient temperature | | |
| during operation | -20 +60 °C | |
| during storage | -50 +80 °C | |
| during transport | -50 +80 °C | |
| relative humidity during operation | 10 95 % | |
| Main circuit | | |
| number of poles for main current circuit | 3 | |
| operating voltage | | |
| rated value | 20 690 V | |
| at AC-3 rated value maximum | 690 V | |
| at AC-3e rated value maximum | 690 V | |
| operating frequency rated value | 50 60 Hz | |
| operational current rated value | 5 A | |
| operational current | | |
| at AC-3 at 400 V rated value | 5 A | |
| at AC-3e at 400 V rated value | 5 A | |
| operating power | | |
| • at AC-3 | | |

| — at 230 V rated value | 1.1 kW | | |
|--|---|--|--|
| — at 400 V rated value | 1.5 kW | | |
| — at 500 V rated value | 2.2 kW | | |
| — at 690 V rated value | 4 kW | | |
| • at AC-3e | | | |
| — at 230 V rated value | 1.1 kW | | |
| — at 400 V rated value | 1.5 kW | | |
| — at 500 V rated value | 2.2 kW | | |
| | | | |
| — at 690 V rated value | 4 kW | | |
| operating frequency | | | |
| • at AC-3 maximum | 15 1/h | | |
| at AC-3e maximum | 15 1/h | | |
| Protective and monitoring functions | | | |
| product function | | | |
| ground fault detection | No | | |
| phase failure detection | No | | |
| design of the overload release | thermal | | |
| maximum short-circuit current breaking capacity (Icu) | | | |
| at AC at 240 V rated value | 100 kA | | |
| at AC at 400 V rated value | 100 kA | | |
| at AC at 400 V rated value at AC at 500 V rated value | 100 kA | | |
| | | | |
| at AC at 690 V rated value | 6 kA | | |
| at 480 AC Y/277 V according to UL 489 rated value | 65 kA | | |
| operating short-circuit current breaking capacity (Ics) at AC | | | |
| at 240 V rated value | 100 kA | | |
| at 400 V rated value | 100 kA | | |
| at 500 V rated value | 100 kA | | |
| at 690 V rated value | 4 kA | | |
| response value current of instantaneous short-circuit trip unit | 65 A | | |
| Short-circuit protection | | | |
| product function short circuit protection | Yes | | |
| , | | | |
| design of the short-circuit trip | magnetic | | |
| design of the short-circuit trip | magnetic | | |
| design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit | magnetic | | |
| design of the fuse link for IT network for short-circuit | gG 32 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V | gG 32 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V | gG 32 A gG 32 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V | gG 32 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions | gG 32 A gG 32 A gG 25 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position | gG 32 A gG 32 A gG 25 A | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards upwards upwards upwards upwards | gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side at the side at the side upwards at the side | gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V | gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards | gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |
| design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards upwards | gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm | | |

| — downwards | 70 mm | |
|---|--|---------------------------|
| — upwards | 70 mm | |
| — backwards | 0 mm | |
| — at the side | 30 mm | |
| — forwards | 0 mm | |
| • for live parts at 690 V | | |
| — downwards | 70 mm | |
| — upwards | 70 mm | |
| — backwards | 0 mm | |
| — at the side | 30 mm | |
| — forwards | 0 mm | |
| Connections/ Terminals | | |
| type of electrical connection | | |
| for main current circuit | screw-type terminals | |
| arrangement of electrical connectors for main current circuit | Top and bottom | |
| type of connectable conductor cross-sections | | |
| • for main contacts | | |
| — solid or stranded | 1 10 mm², max. 2x 10 mm² | |
| finely stranded with core end processing | 1 16 mm², max. 6 + 16 mm² | |
| • for AWG cables for main contacts | 2x (14 10) | |
| tightening torque | | |
| for main contacts with screw-type terminals | 2.5 3 N·m | |
| design of screwdriver shaft | Diameter 5 to 6 mm | |
| size of the screwdriver tip | Pozidriv size 2 | |
| design of the thread of the connection screw | | |
| • for main contacts | M4 | |
| Safety related data | | |
| B10 value | | |
| with high demand rate according to SN 31920 | 5 000 | |
| proportion of dangerous failures | | |
| with low demand rate according to SN 31920 | 50 % | |
| with high demand rate according to SN 31920 | 50 % | |
| failure rate [FIT] | | |
| with low demand rate according to SN 31920 | 50 FIT | |
| T1 value for proof test interval or service life according to IEC 61508 | 10 a | |
| protection class IP on the front according to IEC 60529 | IP20 | |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front | |
| display version for switching status | Handle | |
| Approvals Certificates | | |
| General Product Approval | | Declaration of Conformity |
| | | |

Confirmation





<u>KC</u>





Declaration of Conformity

Test Certificates

Marine / Shipping

other

UK CA Special Test Certificate

Type Test Certificates/Test Report





Household and similar appliances

other Railway Environment



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-1FD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-1FD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1FD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-1FD10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1FD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-1FD10&objecttype=14&gridview=view1

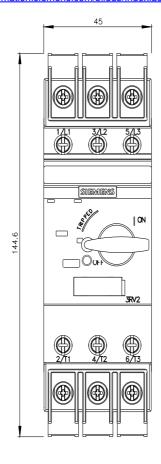

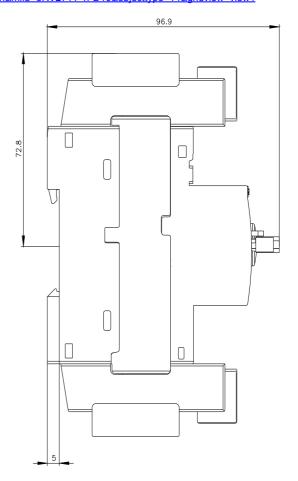

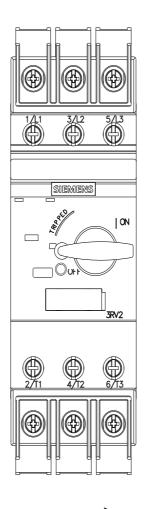

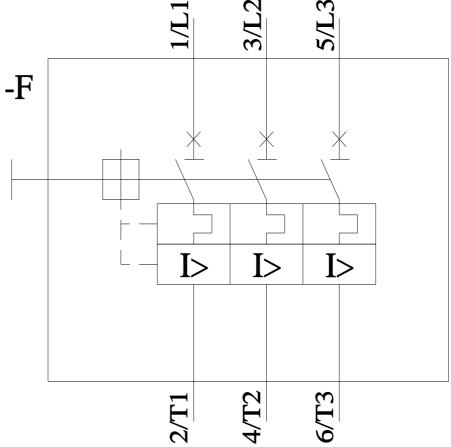

last modified: 8/29/2023 🖸