Nylon Wallplates

Features and Benefits

Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

- Standard size is ⅛ inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are ⅛ inch larger to provide you that extra coverage to hide rough box openings. The depth is ¼ inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

Nylon Wallplates

Almond | Black | Brown | Gray | Ivory | Light Almond | Office White | White

Nylon Pre-Marked Wallplates

Blue | Ivory | Orange | Red

Metal Wallplates

Aluminum | Brass | Brass Plated | Chrome | Stainless Steel

Pre-Marked

Stainless Steel

Combination Wallplates, 3-Gang

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
3-Gang, 2-Toggle, 1-Duplex	Brown	**NP28**	**NPJ28**	Aluminum	①
	Gray	**NP28GY**	–	Brass	①
	Ivory	**NP28I**	**NPJ28I**	Brass Plated	**SBP28**
	Light Almond	**NP28LA**	**NPJ28LA**	Chrome	①
	White	**NP28W**	**NPJ28W**	S/S 302/304	**SS28**
				S/S 430	–
				Steel, Almond	**SP28AL***
				Steel, Gray	**SP28G***
3-Gang, 1-Toggle, 2-Duplex 	Black	**NP182BK**	–	Aluminum	①
	Brown	**NP182**	–	Brass	①
	Gray	**NP182GY**	–	Brass Plated	①
	Ivory	**NP182I**	–	Chrome	①
	White	**NP182W**	–	S/S 302/304	**SS182**
				S/S 430	–
3-Gang, 2-Toggle, 1-Decorator	Black	**NP226BK**	**NPJ226BK**	Aluminum	①
	Brown	**NP226**	**NPJ226**	Brass	①
	Gray	**NP226GY**	**NPJ226GY**	Brass Plated	①
	Ivory	**NP226I**	**NPJ226I**	Chrome	①
	Light Almond	**NP226LA**	**NPJ226LA**	S/S 302/304	**SS226**
	White	**NP226W**	**NPJ226W**	S/S 430	–
				Steel, Gray	**PJS226G***
3-Gang, 1-Toggle, 2-Decorator	Black	**NP1262BK**	–	Aluminum	①
	Brown	**NP1262**	–	Brass	①
	Gray	**NP1262GY**	–	Brass Plated	①
	Ivory	**NP1262I**	–	Chrome	①
	Light Almond	**NP1262LA**	–	S/S 302/304	①
	White	**NP1262W**	–	S/S 430	–
3-Gang, 2-Duplex, 1-Blank 	Black	–	–	Aluminum	①
	Brown	–	–	Brass	①
	Gray	–	–	Brass Plated	①
	Ivory	–	–	Chrome	①
	Light Almond	–	–	S/S 302/304	**SS211**
	White	–	–	S/S 430	–
3-Gang, 1-Duplex, 1-Blank, 1-Duplex 	Black	–	–	Aluminum	①
	Brown	–	–	Brass	①
	Gray	–	–	Brass Plated	①
	Ivory	–	–	Chrome	①
	Light Almond	–	–	S/S 302/304	**SS8147**
	White	–	–	S/S 430	–
3-Gang, 2-Toggle, 1-Blank 	Black	–	–	Aluminum	①
	Brown	–	–	Brass	①
	Gray	–	–	Brass Plated	①
	Ivory	–	–	Chrome	①
	Light Almond	–	–	S/S 302/304	**SS213**
	White	–	–	S/S 430	–

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.
①Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.
**Powder coat paint finish.*

Specifications

Listings	
Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.
Nylon Plate	
Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.
302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate	
Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.
430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate	
Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.
Brass (70% Copper, 30% Zinc) Plate	
Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.
Aluminum Plate	
Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.
Brass Plated Steel Plate	
Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.
Chrome Plated Steel Plate	
Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.
Steel Painted Plate	
Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.

Product Dimensions



Size	Standard Metal Height	Standard Metal Width	Painted Metal Width	Size	Jumbo Metal Height	Jumbo Metal Width
1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)			
4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)			
5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)			
6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)			
7-Gang	4.50" (114.3)	13.68" (347.5)				
8-Gang	4.50" (114.3)	15.44" (392.1)				



Size	Standard Nylon Height	Standard Nylon Width	Size	Mid-Size Nylon Height	Mid-Size Nylon Width
1-Gang	4.63" (117.6)	2.88" (73.2)	1-Gang	4.88" (124.0)	3.13" (79.5)
2-Gang	4.63" (117.6)	4.69" (119.1)	2-Gang	4.88" (124.0)	4.94" (125.4)
3-Gang	4.63" (117.6)	6.50" (165.1)	3-Gang	4.88" (124.0)	6.75" (171.5)
4-Gang	4.63" (117.6)	8.31" (211.1)	4-Gang	4.88" (124.0)	8.56" (217.4)
5-Gang	4.63" (117.6)	10.12" (256.1)			
6-Gang	4.63" (117.6)	11.93" (303.0)			



Size	Snap-On Nylon Height	Snap-On Nylon Width
1-Gang	4.68" (118.9)	2.94" (74.7)
2-Gang	4.68" (118.9)	4.75" (120.7)
3-Gang	4.68" (118.9)	6.56" (166.6)
4-Gang	4.68" (118.9)	8.37" (212.6)
5-Gang	4.68" (118.9)	10.18" (258.6)
6-Gang	4.68" (118.9)	11.99" (304.5)

Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical

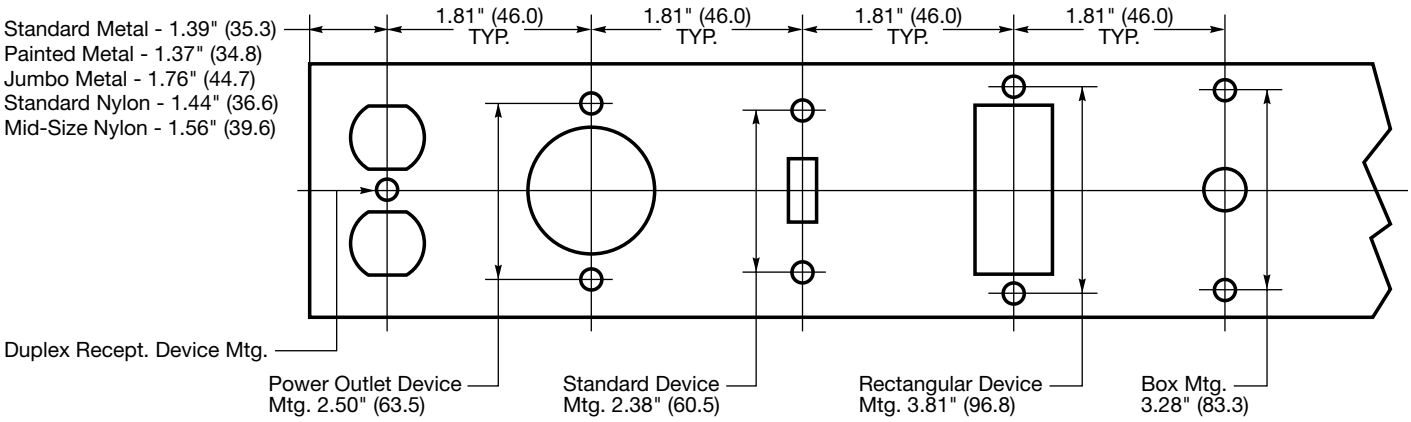

Note: Specifications are subject to change without notice.