


Sanding



COOLCUT XX | X-TRACUT | TOPCUT | COOLCUT | TWO-IN-ONE | BLENDEX | FX | ACCESSORIES

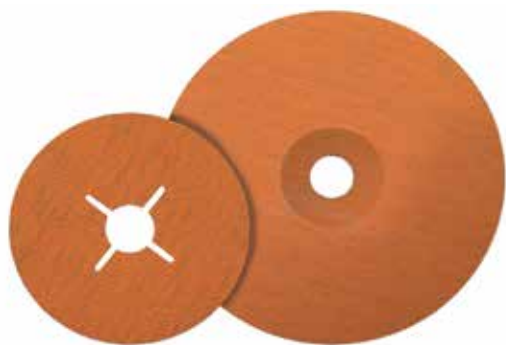

- ▶ Remove more material in less time even when compared to a grinding wheel
- ▶ Provide a consistent surface finish, disc after disc
- ▶ Cooling agents ensure cool cutting to prevent burning and distortion
- ▶ All 7" sanding discs are preformed to fit precisely on backing pads* without warping and allowing maximum contact with the workpiece

* Use Turbo backing pads for maximum benefit



COOLCUT XX™

Sanding discs with Cyclone™ Technology



An exclusive high-tech blend of abrasive grains as well as bond and cooling agents are incorporated in these discs, allowing you to blend and finish more pieces and establish improved productivity.

- ✓ **IMPROVED! 90% more stock removal than before**
- ✓ **6 times more stock removal than regular sanding discs**
- ✓ **2 times faster cutting than regular sanding**



Dia.	Arbor	Grit	Order No.	Min. Pkg.	Std. Ctn.
4 1/2"	7/8"	36	15-X 453	25	250
4 1/2"	7/8"	50	15-X 455	25	250
4 1/2"	7/8"	60	15-X 456	25	250
4 1/2"	7/8"	80	15-X 458	25	250
4 1/2"	7/8"	100	15-X 460	25	250
4 1/2"	7/8"	120	15-X 462	25	250
5"	7/8"	36	15-X 503	25	250
5"	7/8"	50	15-X 505	25	250
5"	7/8"	60	15-X 506	25	250
5"	7/8"	80	15-X 508	25	250
5"	7/8"	100	15-X 510	25	250
5"	7/8"	120	15-X 512	25	250
7"	7/8"	36	15-X 703	25	250
7"	7/8"	50	15-X 705	25	250
7"	7/8"	60	15-X 706	25	250
7"	7/8"	80	15-X 708	25	250
7"	7/8"	100	15-X 710	25	250
7"	7/8"	120	15-X 712	25	250

X-TRACUT™

Non-woven sanding discs

These revolutionary sanding discs are guaranteed to cut cooler, faster and last much longer than conventional sanding discs.



Dia.	Arbor	Order No.	Min. Pkg.	Std. Ctn.
4 1/2"	7/8"	15-A 453	10	100
5"	7/8"	15-A 503	10	100
7"	7/8"	15-A 703	10	100


Should be used with clamping nut 15-D 014.

TOPCUT™

For the toughest sanding applications



Dia.	Arbor	Grit	Order No.	Min. Pkg.	Std. Ctn.
4 1/2"	7/8"	24	15-P 452	25	250
4 1/2"	7/8"	36	15-P 453	25	250
4 1/2"	7/8"	60	15-P 456	25	250
4 1/2"	7/8"	80	15-P 458	25	250
5"	7/8"	24	15-P 502	25	250
5"	7/8"	36	15-P 503	25	250
5"	7/8"	60	15-P 506	25	250
5"	7/8"	80	15-P 508	25	250
7"	7/8"	24	15-P 702	25	250
7"	7/8"	36	15-P 703	25	250
7"	7/8"	60	15-P 706	25	250
7"	7/8"	80	15-P 708	25	250

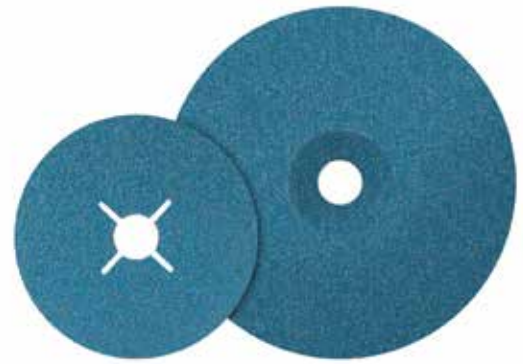

- ▶ For the toughest weld removal, grinding and blending applications
- ▶ "Blue" zirconium abrasive grains remove more material faster
- ▶ High strength heat resistant bond for longest disc life

**COOLCUT™**

General purpose sanding



Dia.	Arbor	Grit	Order No.	Min. Pkg.	Std. Ctn.
4 1/2"	7/8"	24	15-C 452	25	250
4 1/2"	7/8"	36	15-C 453	25	250
4 1/2"	7/8"	40	15-C 454	25	250
4 1/2"	7/8"	50	15-C 455	25	250
4 1/2"	7/8"	60	15-C 456	25	250
4 1/2"	7/8"	80	15-C 458	25	250
4 1/2"	7/8"	100	15-C 460	25	250
4 1/2"	7/8"	120	15-C 462	25	250
5"	7/8"	24	15-C 502	25	250
5"	7/8"	36	15-C 503	25	250
5"	7/8"	40	15-C 504	25	250
5"	7/8"	50	15-C 505	25	250
5"	7/8"	60	15-C 506	25	250
5"	7/8"	80	15-C 508	25	250
5"	7/8"	100	15-C 510	25	250
5"	7/8"	120	15-C 512	25	250
7"	7/8"	24	15-C 702	25	250
7"	7/8"	36	15-C 703	25	250
7"	7/8"	40	15-C 704	25	250
7"	7/8"	50	15-C 705	25	250
7"	7/8"	60	15-C 706	25	250
7"	7/8"	80	15-C 708	25	250
7"	7/8"	100	15-C 710	25	250
7"	7/8"	120	15-C 712	25	250



- ▶ For general purpose sanding, light weld removal, surface cleaning and finishing
- ▶ Premium blend of aluminum oxide grain
- ▶ High removal rate, cool cutting



- ▶ High quality impact resistant plastic with excellent heat dissipation for longest life



- ▶ Standard pad, black, medium flexibility for light weld removal and blending



- ▶ Soft pad, white, extra flexible for surface finishing where a wider contact area is required



Backing pad assemblies



Dia.	Thread	Order No.	Max. RPM	Std. Pkg.	Std. Ctn.
4"	M10 × 1.25	15-D 030	15,000	1	10
4"	3/8"-24	15-D 035	15,000	1	10
4 1/2"	M14 × 2.0	15-D 042	13,300	1	10
4 1/2"	5/8"-11	15-D 044	13,300	1	10
5"	M14 × 2.0	15-D 052	12,200	1	10
5"	5/8"-11	15-D 054	12,200	1	10
6"	M14 × 2.0	15-D 062	10,200	1	10
6"	5/8"-11	15-D 064	10,200	1	10
7"	5/8"-11	15-D 027	8,600	1	10

Turbo backing pads

Special saucer shaped backing pad with ribbed backing, ensures a continuous stream of air between pad and disc for cool operation and long disc life.



Dia.	Thread	Color	Order No.	Max. RPM	Std. Pkg.	Std. Ctn.
4 1/2"	5/8"-11	Black	15-M 044	13,300	1	10
5"	5/8"-11	Black	15-M 054	12,200	1	10
5"	5/8"-11	White	15-M 055	12,200	1	10
6"	5/8"-11	Black	15-M 064	10,200	1	10
7"	5/8"-11	Black	15-M 007	8,600	1	10
7"	5/8"-11	White	15-M 008	8,600	1	10

Clamping nuts *(supplied separately)*

Order No.		Order No.	
For 4" backing pads			
M10 × 1.25	15-D 016	3/8"-24	15-D 015
For 4 1/2" and 5" backing pads			
M10 × 1.25	15-D 010	1/2"-13	15-D 013
M10 × 1.5	15-D 011	5/8"-11	15-D 014
M14 × 2.0	15-D 012		
For 6" and 7" backing pads		5/8"-11	15-H 014
For 7" Turbo Action backing pad		5/8"-11	15-M 014
Spacer washers (supplied separately)			
		Order No.	
For grinders with:		5/8"-11 spindle	07-Q 001
		M14 × 2.0 spindle	07-Z 005