


**Commercial Grade**

Description	Color	Cat. No.	
Rating		120/277V AC	
		15A	20A
3-Way	White	CS315-2W	CS320-2W
	Ivory	CS315-2I	CS320-2I
	Light Almond	CS315-2T	CS320-2T
	Grey	CS315-2GY	CS320-2GY
	Black	-	CS320-2E
	Brown	CS315-2	CS320-2
3-Way, Framed Toggle	White	54503-2W	54523-2W
	Ivory	54503-2I	54523-2I
	Grey	54503-2GY	54523-2GY
	Brown	54503-2	54523-2
4-Way	White	CS415-2W	CS420-2W
	Ivory	CS415-2I	CS420-2I
	Light Almond	CS415-2T	CS420-2T
	Grey	CS415-2GY	CS420-2GY
	Black	-	CS420-2E
	Brown	CS415-2	CS420-2
4-Way, Framed Toggle	White	54504-2W	54524-2W
	Ivory	54504-2I	54524-2I
	Light Almond	54504-2T	-
	Grey	54504-2GY	54524-2GY
	Brown	54504-2	54524-2

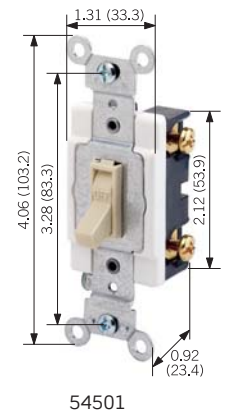


†Hospital Call Switch turns on when toggle is pulled down with cord (3-ft braided cord included).

**SIDE WIRED - LIGHTED U S**

Description	Color	Cat No.
Rating		15A - 120VAC
Single Pole	White	5501-LHW
	Ivory	5501-LHI
3-Way	White	5503-LHW
	Ivory	5503-LHI

## Commercial Grade



1101-CG

### SIDE WIRED - CANADIAN S

Description	Colors	Cat No.		Cat No.
		120/277VAC	347VAC	
		<b>15A</b>	<b>20A</b>	<b>15A</b>
Single Pole, Framed Toggle	White	1101-CW	—	18201-CW
	Ivory	1101-CI	54521-2I	18201-CI
	Grey	1101-CG	—	18201-CG
	Black	1101-CE	—	—
	Brown	1101-CB	54521-2	18201-CB
Double Pole, Framed Toggle	White	1102-CW	54522-2W	18202-CW
	Ivory	1102-CI	54522-2I	18202-CI
	Brown	1102-CB	54522-2B	18202-CB
3-Way, Framed Toggle	White	1103-CW	—	18203-CW
	Ivory	1103-CI	54523-2I	18203-CI
	Grey	1103-CG	—	18203-CG
	Brown	1103-CB	54523-2B	18203-CB
4-Way, Framed Toggle	White	1104-CW	—	18204-CW
	Ivory	1104-CI	54524-2I	18204-CI
	Grey	—	—	18204-CG
	Black	1104-CE	—	—
	Brown	1104-CB	54524-2B	18204-CB

#### TESTING AND CODE COMPLIANCE

- Meets all NEMA WD 1 & 6, and ANSI requirements
- Meets Federal Specification WS-896
- UL Listed (File #E-7458)
- CSA Certified (File #152105)
- NOM Certified (#057)

#### HORSEPOWER

- 15A - 1 @ 120V, 2 @ 240V 12 AMP Max
- 20A - 1 @ 120V, 2 @ 240V 16 AMP Max

#### MATERIAL CHARACTERISTICS

- Environmental: Flammability, V2 Rating
- Operating Temperature: -40°C to 120°C

#### ELECTRICAL

- Dielectric Voltage: Withstands 1500V for 1 min.
- Overload UL 20 Test: 100 cycles of overload at 4.8 times rated current
- Temp. Rise: 30° C max at full rated current
- Endurance: UL 20/Fed Spec 50,000 cycles min., tungsten filament lamp load (Fed. Spec.) WS896E, SP, DP, 3-Way, 4-Way, Pilot Light, Illum., Key Lock

#### MECHANICAL

- Terminal I.D.: Brass-Hot, Black-Hot, White-Neutral, Green-Grounding
- Terminal Accom.: #14-#10 AWG back wired; #14-#12 AWG side wired
- Product I.D.: Ratings are permanently stamped on device strap
- Torque Range: 12-14 inch pound