








Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L14-30P	 L14-30R	 L15-30P	 L15-30R
Rating	30A-125/250V		30A-3Ø 250V	
Flanged Device	2715	2716	2725	2726





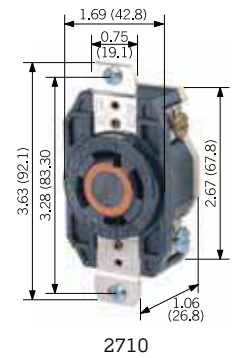

2710





Description	Cat. No.	Cat. No.
NEMA	 L14-30R	 L15-30R
Rating	30A-125/250V	30A-3Ø 250V
V-O-MAX® Single Flush Receptacle	2710	2720
V-O-MAX Single Flush Receptacle, Isolated Ground	2710-IG	2720-IG
All Black	2710-B	—



2715

3-Pole, 4-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L16-30P	 L16-30R	 L17-30P	 L17-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Black & White Nylon Body	2731	2733	2741	2743
All Black	2731-B	2733-B	—	—

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L16-30P	 L16-30R	 L17-30P	 L17-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Flanged Device	2735	2736	2745	2746

Continued On Next Page >