



# Locking Blade Devices

**INDEX**


Industrial Grade

Black & White® Locking Devices .....	271
Watertight, Dust-tight & Corrosion-Resistant Devices .....	299
Combination Devices .....	307

## Industrial Grade


### Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

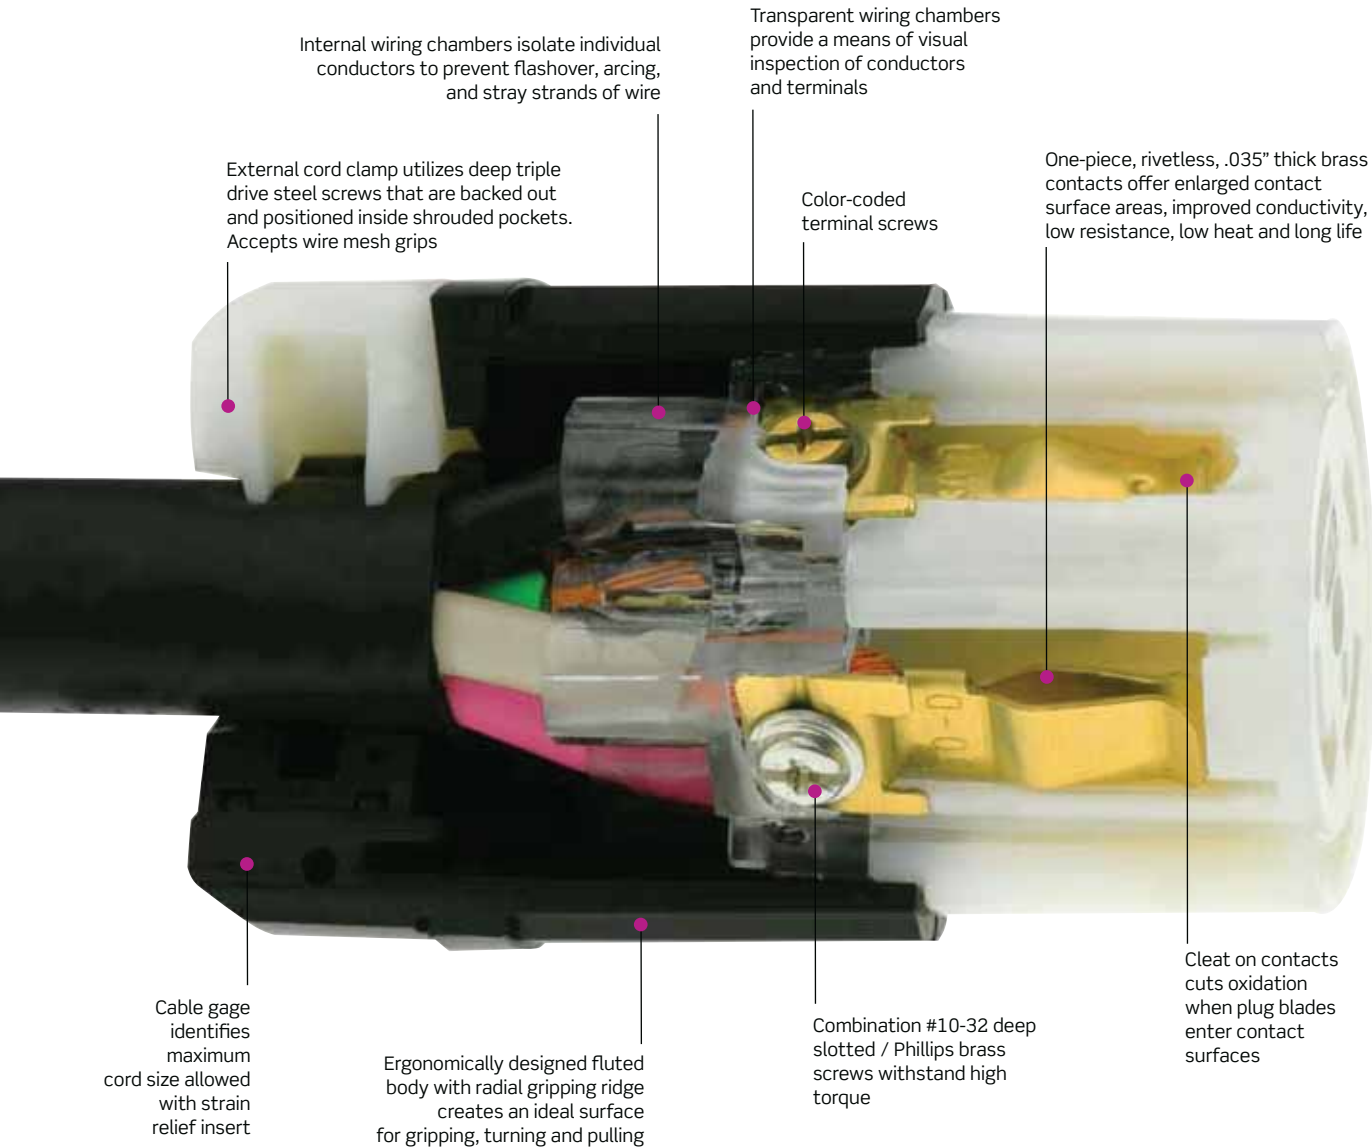

#### TESTING AND CODE COMPLIANCE

- UL 498 Listed
- Federal Specification WC-596 Listed
- CSA Specification C22.2 No. 42 Certified

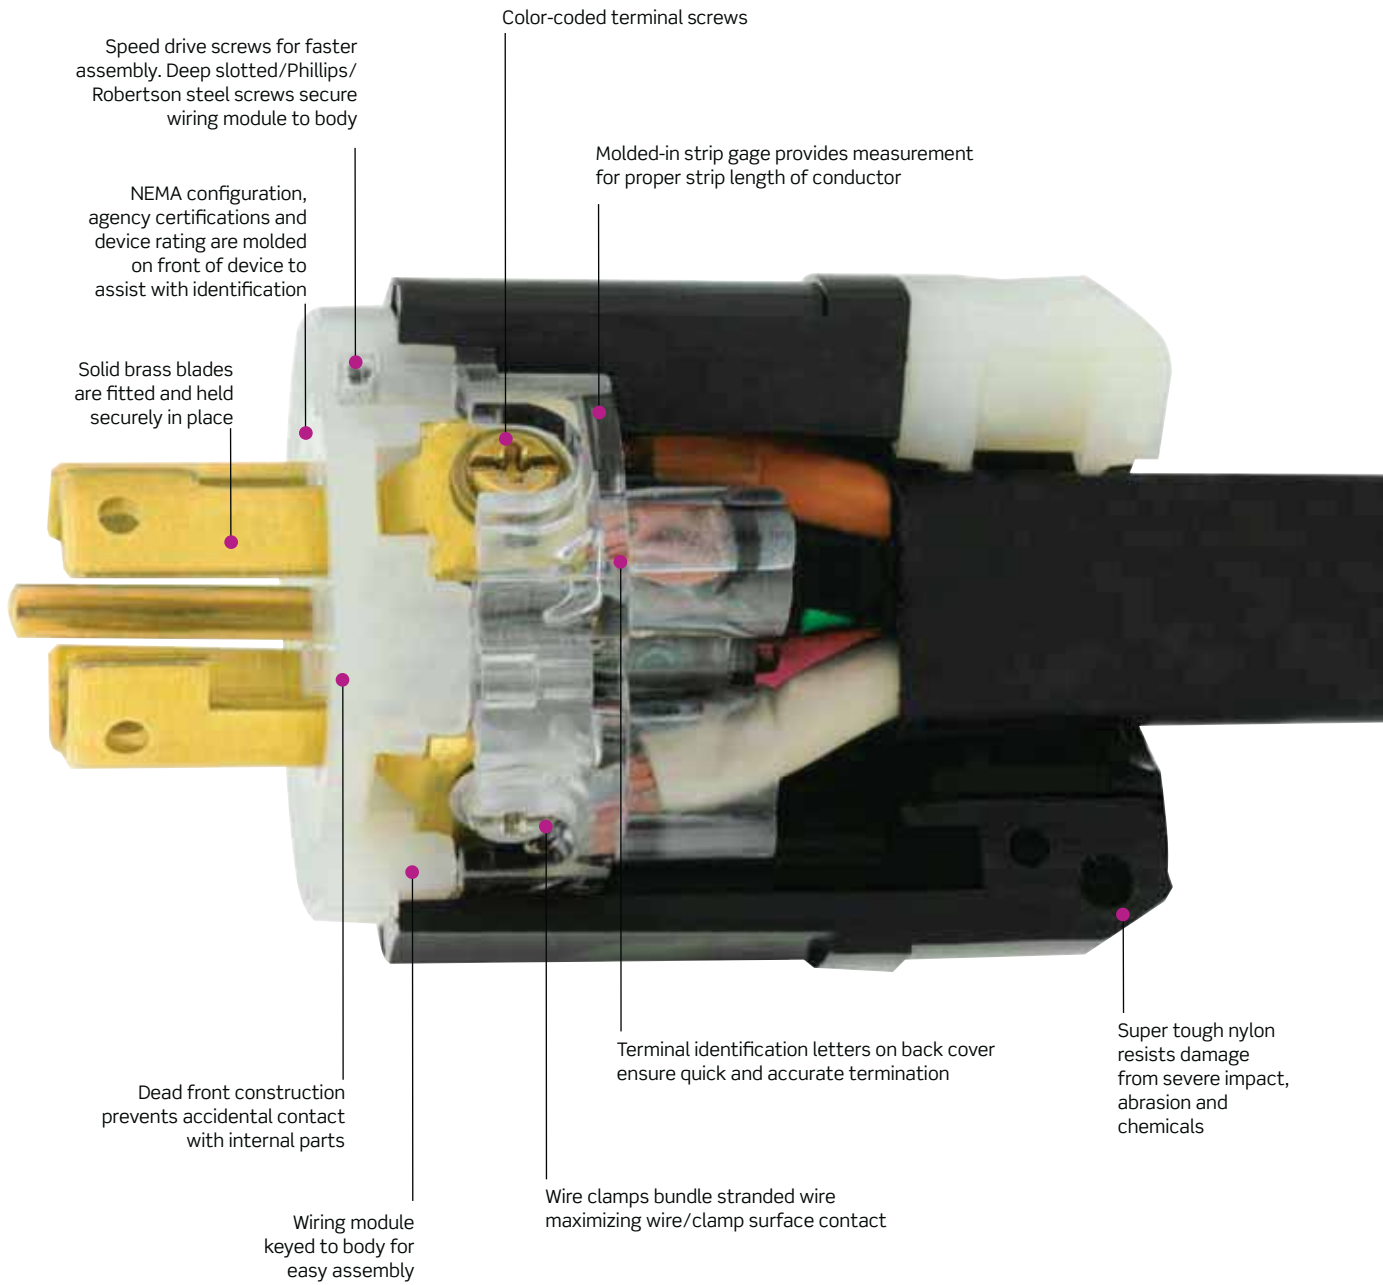

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.





Deep-funnelled, large wire wells guide conductors into termination position.

## Industrial Grade



### Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-0 Flammability Rating.

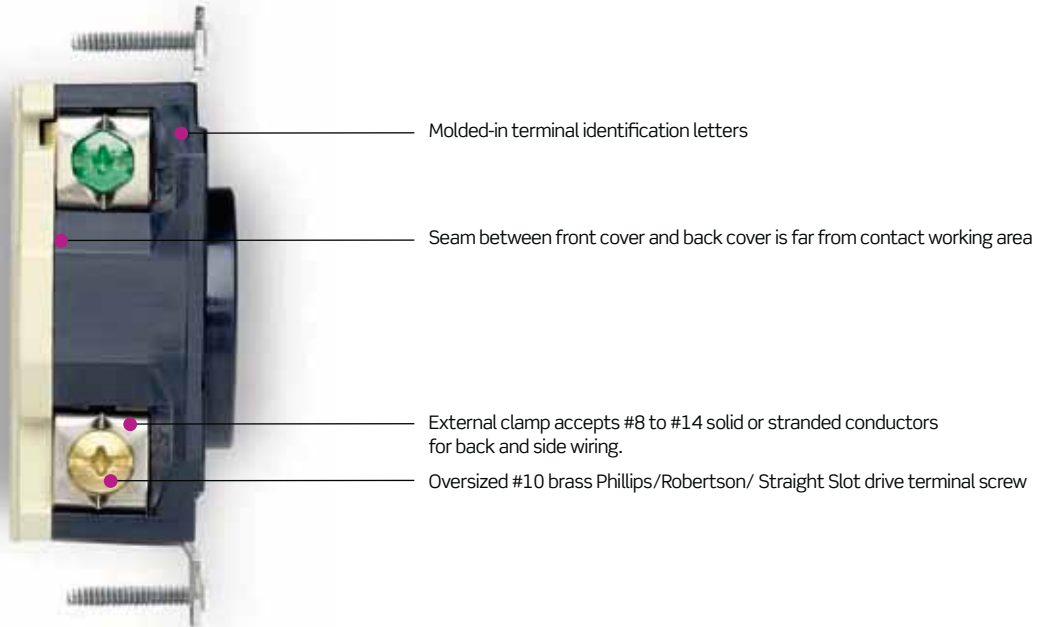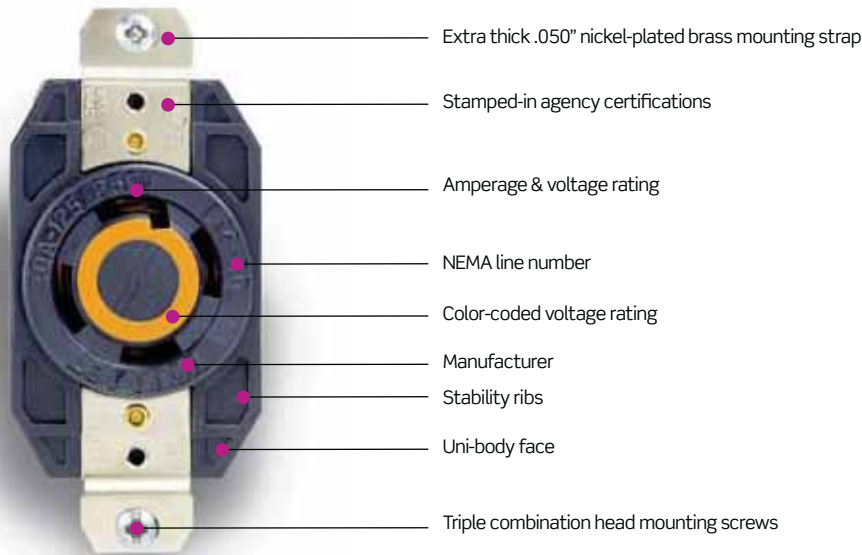

FLUSH RECEPTACLES-UL V-0 RATING

Color-Coded Voltage Ratings

125V	250V	277V AC
125/250V	3ø250V	3ø480V
	600V	

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



### Industrial Grade Black & White® Locking Blade Devices

#### Specifications and Features

- Backed by a Lifetime Warranty

#### Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring—accepts wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7 for 3.5 years)
- Power Indication™ 20A and 30A Locking Plugs & Connectors equipped with green LED rated at 100,000 hours (24/7 for 10 years)

#### Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funnelled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps bundle stranded wire without cutting wire strands







#### Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impact and harsh chemicals
- Double-wipe phosphor-bronze power contacts

#### V-O-Max® Locking Flush Receptacles

- UL 94 V-O Flammability Rating, the best rating of any material used in Industrial Locking Flush Receptacles available today
- Extra-thick .050" nickel-plated brass mounting strap for high-abuse applications
- Designed for maximum durability: One-piece .040" brass, high copper-content contacts with nickel plated clamp-type terminals
- Color-coded voltage rating on face for easy identification

### BLACK & WHITE 15 AMP 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L5-15P	 L5-15R	 L6-15P	 L6-15R	 L7-15P	 L7-15R
<b>Rating</b>	<b>15A-125V</b>		<b>15A-250V</b>		<b>15A-277V AC</b>	
Black & White Nylon Body	4720-C	4729-C	4570-C	4579-C	4770-C	4779-C
Power Indication™	4720-PLC	4729-PLC	4570-PLC	4579-PLC	4770-PLC	4779-PLC
Black & White Nylon Body						
Angle Locking	4720-CA	—	4570-CA	—	4770-CA	—
Black & White Nylon Body						
All Black Nylon Body	4720-CB	4729-CB	—	4579-B	4770-B	4779-B
Yellow Nylon Body	4720-CY	4729-CY	4570-CY	4579-CY	4770-CY	4779-CY

Continued On Next Page >




**black & white®**

## Industrial Grade

Continued from previous page >



4716-C

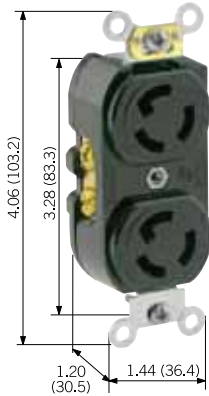

4700



7545-C


Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>						
	L5-15P	L5-15R	L6-15P	L6-15R	L7-15P	L7-15R
<b>Rating</b>	<b>15A-125V</b>		<b>15A-250V</b>		<b>15A-277V AC</b>	
Flanged Device	4716-C	4715-C	4586-C	4585-C	4786-C	4785-C

Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>			
	L5-15R	L6-15R	L7-15R




Rating	15A-125V	15A-250V	15A-277V AC
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4700	4550	4750
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired, 6" Green Ground Lead	4700-IG	4550-IG	4570-IG
Duplex Flush Receptacle w/2 Hot Feeds and 1 Neutral Return, Self Grounding, Back and Side Wired	4702-IIR	—	—
Duplex Flush Receptacle w/Split Feed - 2 Hot Feeds and 2 Neutral Returns, Self Grounding, Back and Side Wired	4703-IIR	—	—
Single Flush Receptacle	4710	4560	4760
Single Flush Receptacle, w/Short Strap	4710-SS	—	—
Single Flush Receptacle, Isolated Ground	4710-IG	4560-IG	4760-IG

### 2-Pole, 2-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>		
	L1-15P	L1-15R
<b>Rating</b>	<b>15A-125V</b>	
Black and White Nylon Body	7545-C	7506-C
Flanged Outlet	—	7526-C

Description	Cat. No.
NEMA	 L1-15R
<b>Rating</b>	<b>15A-125V</b>
Duplex Flush Receptacle	7540
Single Flush Receptacle	7535

### WALLPLATES AND COVERS

302 Stainless Steel Single Receptacle	302 Stainless Steel Duplex Receptacle	Weather-Resistant Flip Lid Cover For Inlets and Outlets*
1.41" Dia. Opening		1.72" Dia. Opening IP64 Rated — Includes Gasket and Screws
		
84004-40	84003-40	WP1

\*For Use with 15A Locking Devices.



#### Related Products

For more information on Weather-Resistant Boots for 15A Locking Plugs and Connectors [see page 288](#).  
For a complete listing of Wallplates and Covers [see page 707](#).

#### TESTING AND CODE COMPLIANCE

- Meet NEMA WD-6, ANSI C-73 requirements
- UL Fed Spec Listed WC-596 (File #E-13393 Plugs, Connectors, Flanged Inlets) (File #E-13399 Receptacles and Flanged Outlets)
- CSA Certified (File #LR-406)
- NOM Certified (#057)

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 60°C

#### ELECTRICAL

Dielectric Voltage: Withstands 2000V  
Current Interr.: Full rated current  
Temp. Rise: Max 30°C after 250 cycles at 200% of rated current

#### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
Terminal Accom.: #18-#10 AWG  
Product I.D.: Ratings are permanently stamped on device


#### DEVICE TYPE

15A Locking - 2 and 3 Wire Plugs and Connectors

#### CORD GRIP RANGE


(.240"-.700") #18-#10 AWG

### DIMENSIONS

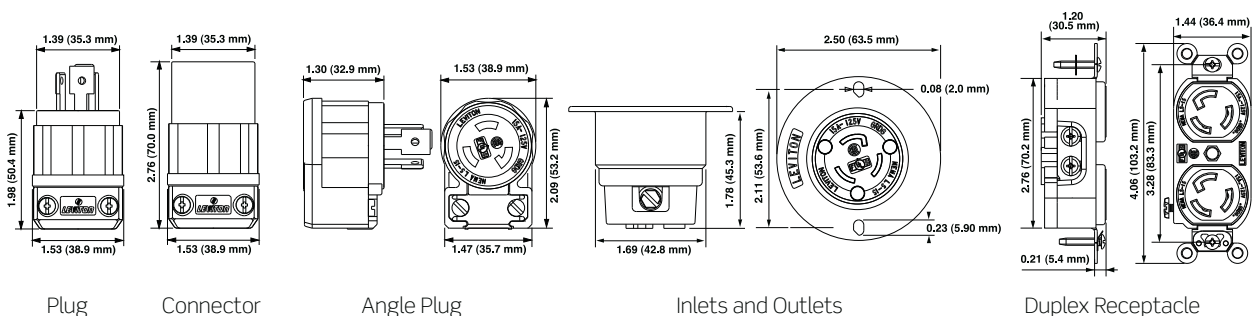

## Industrial Grade

### BLACK AND WHITE® 20 AMP 2-Pole, 3-Wire Grounding

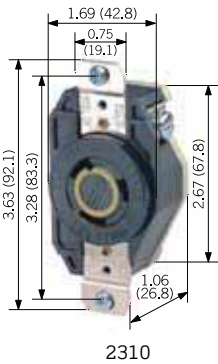







Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>						
	L5-20P	L5-20R	L6-20P	L6-20R	L7-20P	L7-20R
<b>Rating</b>	<b>20A-125V</b>		<b>20A-250V</b>		<b>20A-277V AC</b>	
Black & White Nylon Body	2311	2313	2321	2323	2331	—
Power Indication™ Black & White Nylon Body	2311-PLC	2313-PLC	2321-PLC	2323-PLC	2331-PLC	2333-PLC
All Black Nylon Body	2311-B	2313-B	—	2323-B	—	2333
Power Indication All Black Nylon Body	2311-PLB	2313-PLB	—	—	—	—
Yellow Nylon Body	2311-CY	2313-CY	2321-CY	2323-CY	—	—

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>						
	L5-20P	L6-20R	L6-20P	L7-20R	L7-20P	L7-20R
<b>Rating</b>	<b>20A-125V</b>		<b>20A-250V</b>		<b>20A-277V AC</b>	
Flanged Device	2315	2316	2325	2326	2335	2336

Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>			
	L5-20R	L6-20R	L7-20R
<b>Rating</b>	<b>20A-125V</b>	<b>20A-250V</b>	<b>20A-277V AC</b>
V-O-MAX® Single Flush Receptacle	2310	2320	2330
V-O-MAX Single Flush Receptacle, Isolated Ground	2310-IG	2320-IG	2330-IG









**2-Pole, 3-Wire Grounding**  

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L24-20P	 L24-20R	 L8-20P	 L8-20R	 L9-20P	 L9-20R
<b>Rating</b>	<b>20A-347V AC</b>		<b>20A-480V AC</b>		<b>20A-600V AC</b>	
Black & White Nylon Body	3721	3723	2341	2343	2351	2353







2341

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L24-20P	 L24-20R	 L8-20P	 L8-20R	 L9-20P	 L9-20R
<b>Rating</b>	<b>20A-347V AC</b>		<b>20A-480V AC</b>		<b>20A-600V AC</b>	
Locking Flanged	3755	3756	2345	2346	2355	2356





2343



Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>	 L24-20R	 L8-20R	 L9-20R
<b>Rating</b>	<b>20A-347V AC</b>	<b>20A-480V AC</b>	<b>20A-600V AC</b>
V-O-MAX® Single Flush Receptacle	3720	2340	2350
V-O-MAX Single Flush Receptacle, Isolated Ground	—	—	2350-IG



2340

**2-Pole, 2-Wire Non-Grounding**  

Description	Cat. No. Plug	Cat. No. Receptacle
<b>NEMA</b>	 L2-20P	 L2-20R
<b>Rating</b>	<b>20A-250V</b>	<b>20A-250V</b>
Black & White Nylon Body	7102-C	7101-C
Non-Polarized	7102-NP	—

Description	Cat. No. Plug	Cat. No. Receptacle
<b>NEMA</b>	 L2-20P	 L2-20R
<b>Rating</b>	<b>20A-250V</b>	<b>20A-250V</b>
Single Flush Receptacle	—	7210-B



7102-C

## Industrial Grade



2411



2413



2431



2433

### 3-Pole, 3-Wire Non-Grounding







Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
<b>Rating</b>	<b>20A-125/250V</b>		<b>20A-3Ø 250V</b>		<b>20A-3Ø 480V</b>	
Black & White Nylon Body	2361	2363	2371	2373	2381	2383

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
<b>Rating</b>	<b>20A-125/250V</b>		<b>20A-3Ø 250V</b>		<b>20A-3Ø 480V</b>	
Flanged Device	2365	2366	2375	2376	2385	2386

Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>			
	L10-20R	L11-20R	L12-20R
<b>Rating</b>	<b>20A-125/250V</b>	<b>20A-3Ø 250V</b>	<b>20A-3Ø 480V</b>
Single Flush Receptacle	2360	2380	2380




### 3-Pole, 4-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>						
	L14-20P	L14-20R	L15-20P	L15-20R	L16-20P	L16-20R
<b>Rating</b>	<b>20A-125/250V</b>		<b>20A-3Ø 250V</b>		<b>20A-3Ø 480V</b>	
Black & White Nylon Body	2411	2413	2421	2423	2431	2433

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L14-20P	 L14-20R	 L15-20P	 L15-20R	 L16-20P	 L16-20R
<b>Rating</b>	<b>20A-125/250V</b>		<b>20A-3Ø 250V</b>		<b>20A-3Ø 480V</b>	
Flanged Device	2415	2416	2425	2426	2435	2436









2416


Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>	 L14-20R	 L15-20R	 L16-20R
<b>Rating</b>	<b>125/250V</b>	<b>20A-3Ø 250V</b>	<b>20A-3Ø 480V</b>
V-O-MAX® Single Flush Receptacle	2410	2420	2430
V-O-MAX Single Flush Receptacle, Isolated Ground	2410-IG	2420-IG	









2435

**4-Pole, 4-Wire Non-Grounding** 

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L18-20P	 L18-20R	 L19-20P	 L19-20R	 L20-20P	 L20-20R
<b>Rating</b>	<b>20A-3ØY 120/208V</b>		<b>20A-3ØY 277/480V</b>		<b>20A-3ØY 347/600V</b>	
Black & White Nylon Body	2441	2443	2451	2453	2461	2463



2410-IG




Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L18-20P	 L18-20R	 L19-20P	 L19-20R	 L20-20P	 L20-20R
<b>Rating</b>	<b>20A-3ØY 120/208V</b>		<b>20A-3ØY 277/480V</b>		<b>20A-3ØY 347/600V</b>	
Flanged Device	2445	2446	2455	2456	2465	2466









**Related Products**







For a complete listing of Wallplates and Covers [see page 707](#).




## Industrial Grade

Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>	 L18-20R	 L19-20R	 L20-20R
<b>Rating</b>	<b>20A-3ØY</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>347/600V</b>
Single Flush Receptacle	2440	2450	2460

### 4-Pole, 5-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L21-20P	 L21-20R	 L22-20P	 L22-20R	 L23-20P	 L23-20R
<b>Rating</b>	<b>20A-3Ø</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>347/600V</b>	<b>20A-3ØY</b> <b>347/600V</b>
Black & White Nylon Body	2511	2513	2521	2523	2531	2533

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L21-20P	 L21-20R	 L22-20P	 L22-20R	 L23-20P	 L23-20R
<b>Rating</b>	<b>20A-3ØY</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>347/600V</b>	<b>20A-3ØY</b> <b>347/600V</b>
Flanged Device	2515	2516	2525	2526	2545	2546

Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>	 L18-20R	 L19-20R	 L20-20R
<b>Rating</b>	<b>20A-3ØY</b> <b>120/208V</b>	<b>20A-3ØY</b> <b>277/480V</b>	<b>20A-3ØY</b> <b>347/600V</b>
V-O-MAX® Single Flush Receptacle	2510	2520	2530
V-O-MAX Single Flush Receptacle, Isolated Ground	2510-IG		2530-IG

### WALLPLATES AND COVERS

302 Stainless Steel	Weather-Resistant	Weather-Resistant	Weather-Resistant
Single Receptacle	Flip Lid Cover*	Flip Lid Cover*	Thermoplastic Cover****
1.60" Dia. Opening	2.24" Dia. Opening	1.72" Dia. Opening	Self-Closing Lid




84020-40



\*\*WP2



\*\*\*7420-CR  
\*\*\*7420-CRG (Grey)



4980-GY

\*IP64 Rated. Includes Gasket and Screws

\*\*For use with 20 + 30A 3,4 and 5 Wire Locking Flanged Inlets and Outlets.

\*\*\*For use with 20A + 30A Single-Locking Receptacles.

\*\*\*\*For receptacles. Includes Gasket and Screws.



### Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors [see page 288](#).  
For a complete listing of Wallplates and Covers [see page 707](#).

#### TESTING AND CODE COMPLIANCE

- Meet NEMA WD-6, ANSI C-73 requirements
- UL Fed Spec Listed WC-596 (File #E-13393 Plugs, Connectors, Flanged Inlets) (File #E-13399 Receptacles and Flanged Outlets)
- CSA Certified (File #LR-406)
- NOM Certified (#057)

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 60°C

#### ELECTRICAL

Dielectric Voltage: Withstands 2000V for UL 498  
Current Interr.: Full rated current  
Temp. Rise: Max 30°C after 250 cycles at 200% of rated current

#### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
Terminal Accomm.: #18-#10 AWG  
Product I.D.: Ratings are permanently stamped on device


#### DEVICE TYPE

20A Locking 2 and 3-Wire  
20A Locking 4 and 5-Wire


#### CORD GRIP RANGE

(.385"-.780") #16-#10 AWG  
(.595"-.895") #14-#10 AWG

### DIMENSIONS

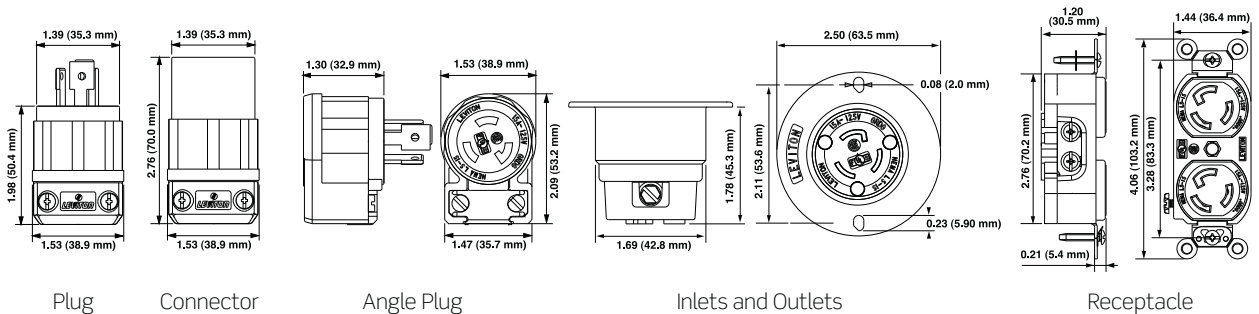

## Industrial Grade



2620



2621-B



2625F

### BLACK & WHITE® 30AMP 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R

Rating	30A-125V		30A-250V		30A-277V AC	
Black & White Nylon Body	2611	2613	2621	C2623	2631	2633
Power Indication™ Black & White Nylon Body	2611-PLC	2613-PLC	2621-PLC	C2623-PLC	2631-PLC	2633-PLC
All Black Nylon Body	2611-B	2613-B	2621-B	C2623-B	—	—
Power Indication All Black Nylon Body	2611-PLB	2613-PLB	—	—	—	—
Yellow Nylon Body	2611-CY	2613-CY	2621-CY	C2623-CY	—	—





Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R


Rating	30A-125V		30A-250V		30A-277V AC	
Flanged Device	2615	2616	2625F	2626F	2635	2636







Description	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>			
	L5-30R	L6-30R	L7-30R

Rating	30A-125V	30A-250V	30A-277V AC
V-O-MAX® Single Flush Receptacle	2610	2620	2630
V-O-MAX Single Flush Receptacle, Isolated Ground	2610-IG	2620-IG	2630-IG
All Black	2610-B	2620-B	

**2-Pole, 3-Wire Grounding**  









Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L8-30P	 L8-30R	 L9-30P	 L9-30R
<b>Rating</b>	<b>30A-480V AC</b>		<b>30A-600V AC</b>	
Black & White Nylon Body	2641	2643	C2651	C2653



Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L8-30P	 L8-30R	 L9-30P	 L9-30R
<b>Rating</b>	<b>30A-480V AC</b>		<b>30A-600V AC</b>	
Flanged Device	2645	2646	2655	2656
<b>NEMA</b>		 L8-30R		 L9-30R
<b>Rating</b>		<b>30A-480V AC</b>		<b>30A-600V AC</b>
V-O-MAX® Receptacle		2640		2650



**3-Pole, 3-Wire Non-Grounding**  

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L10-30P	 L10-30R	 L11-30P	 L11-30R
<b>Rating</b>	<b>30A- 125/250V</b>		<b>30A- 3Ø 250V</b>	
Black & White Nylon Body	2661	2663	2671	2673
<b>Description</b>	<b>Cat. No. Inlet</b>	<b>Cat. No. Outlet</b>	<b>Cat. No. Inlet</b>	<b>Cat. No. Outlet</b>
<b>NEMA</b>	 L10-30P	 L10-30R	 L11-30P	 L11-30R
<b>Rating</b>	<b>30A- 125/250V</b>		<b>30A- 3Ø 250V</b>	
Flanged Device	2665	2666	2675	2676





Continued On Next Page >





## Industrial Grade



Continued From Previous Page >

Description	Cat. No.	Cat. No.
<b>NEMA</b>	 L10-30R	 L11-30R
<b>Rating</b>	<b>30A-125/250V</b>	<b>30A-3Ø 250V</b>
V-O-MAX®	2660	—
Single Flush Receptacle	—	2670
Single Flush Receptacle	—	2670





### 3-Pole, 3-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L12-30P	 L12-30R	 L13-30P	 L13-30R
<b>Rating</b>	<b>30A-3Ø 480V</b>		<b>30A-3Ø 600V</b>	
Black & White	2681	2683	2691	2693
Nylon Body				

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
<b>NEMA</b>	 L12-30P	 L12-30R	 L13-30P	 L13-30R
<b>Rating</b>	<b>30A-3Ø 480V</b>		<b>30A-3Ø 600V</b>	
Flanged Device	2685	2686	2691	2693

Description	Cat. No.	Cat. No.
<b>NEMA</b>	 L12-30R	 L13-30R
<b>Rating</b>	<b>30A-3Ø 480V</b>	<b>30A-3Ø 600V</b>
Single Flush Receptacle	2680	2690

### 3-Pole, 4-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
<b>NEMA</b>	 L14-30P	 L14-30R	 L15-30P	 L15-30R
<b>Rating</b>	<b>30A-125/250V</b>		<b>30A-3Ø 250V</b>	
Black & White	2711	2713	2721	2723
Nylon Body				
All Black	2711-B	2713-B	2721-B	2723-B
Yellow Nylon Body	—	2713-CY	—	—



2711



2713