



Locking Blade Devices


INDEX

Industrial Grade
Black & White® Locking Devices 271
Watertight, Dust-tight &
Corrosion-Resistant Devices 299
Combination Devices 307

Industrial Grade


Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's Industrial Grade Locking Devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of Locking Devices of unmatched flexibility and dependability.

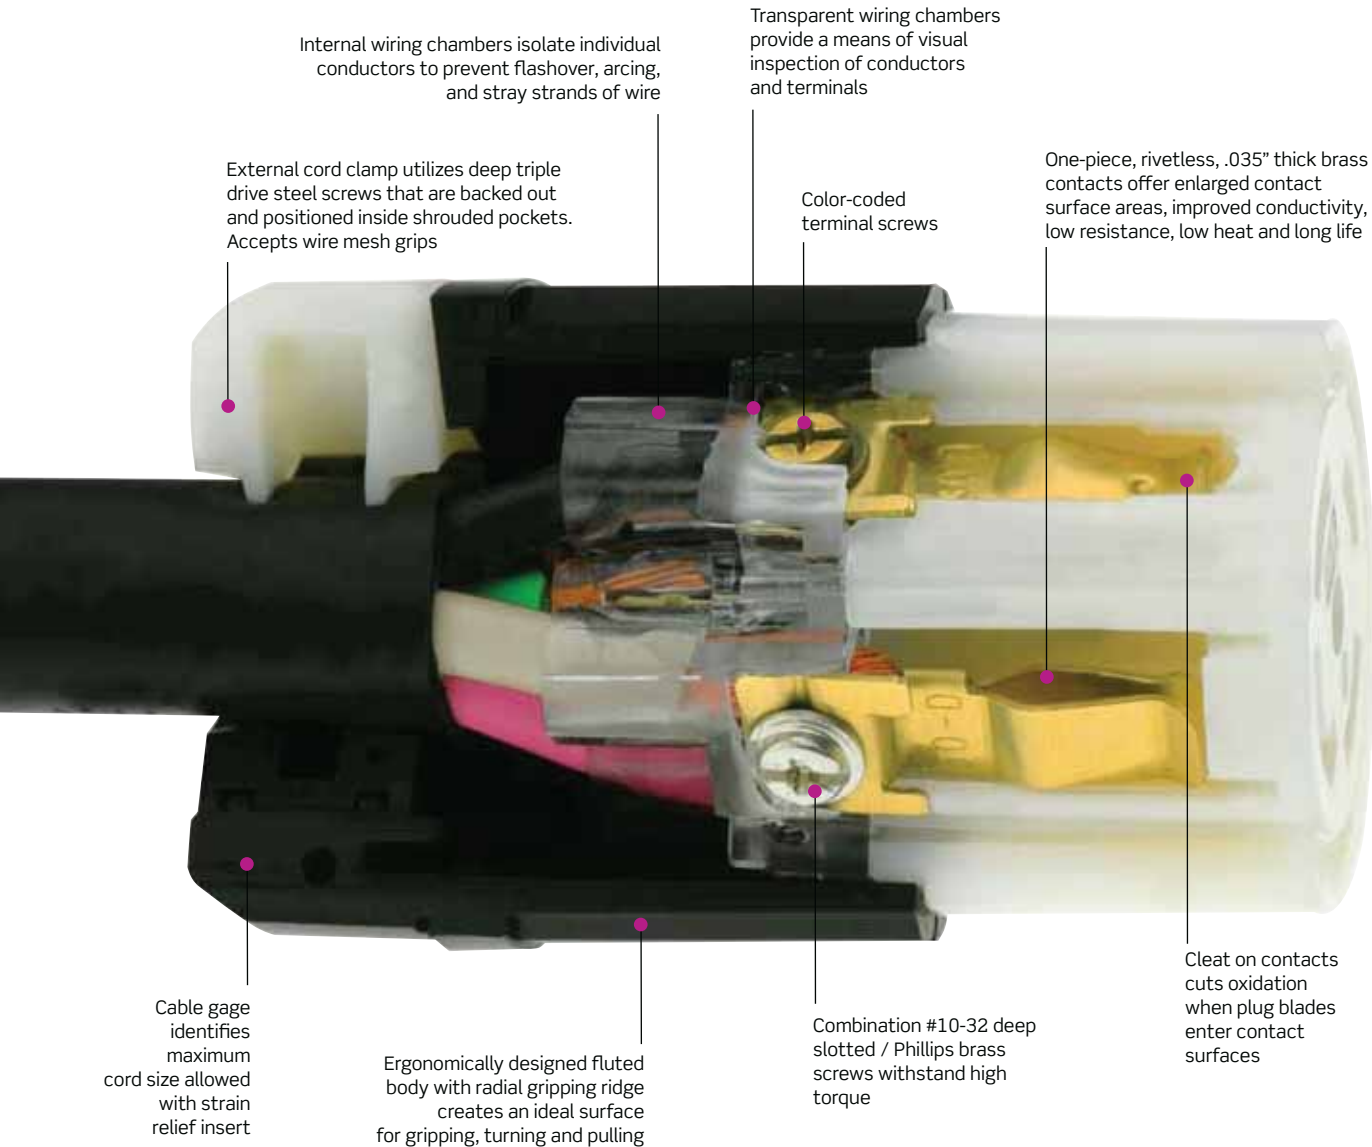

TESTING AND CODE COMPLIANCE

- UL 498 Listed
- Federal Specification WC-596 Listed
- CSA Specification C22.2 No. 42 Certified

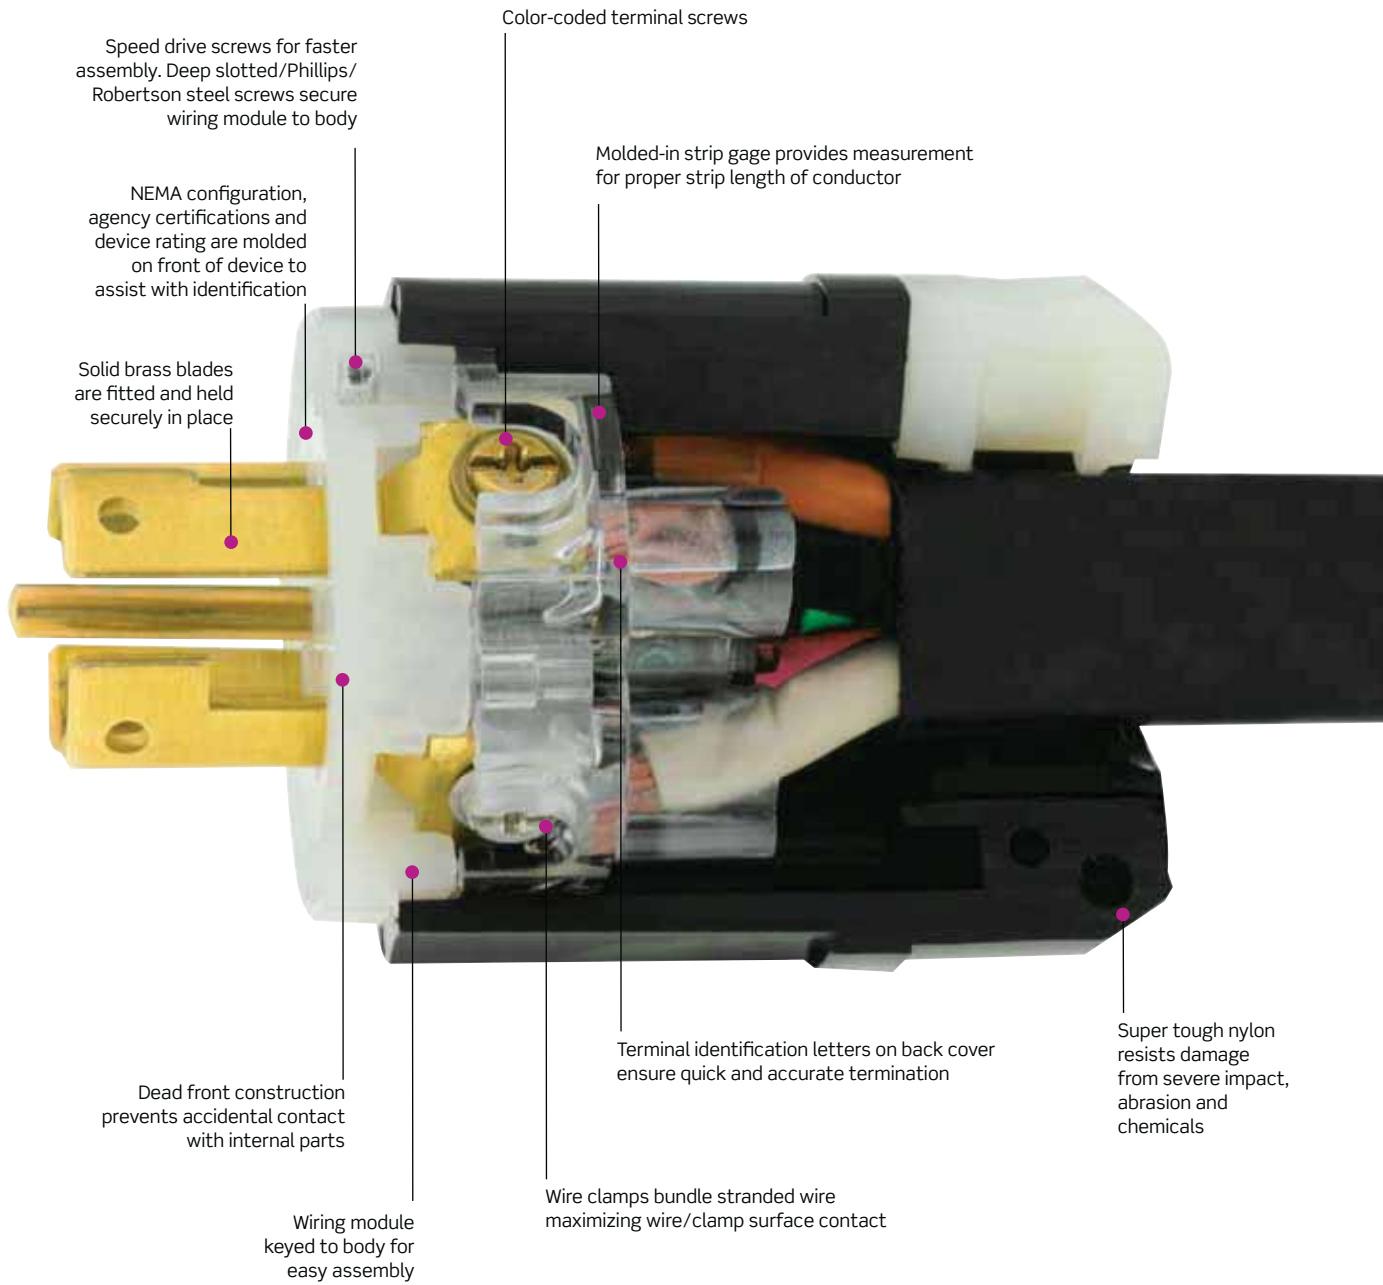

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.





Deep-funnelled, large wire wells guide conductors into termination position.

Industrial Grade



Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-0 Flammability Rating.

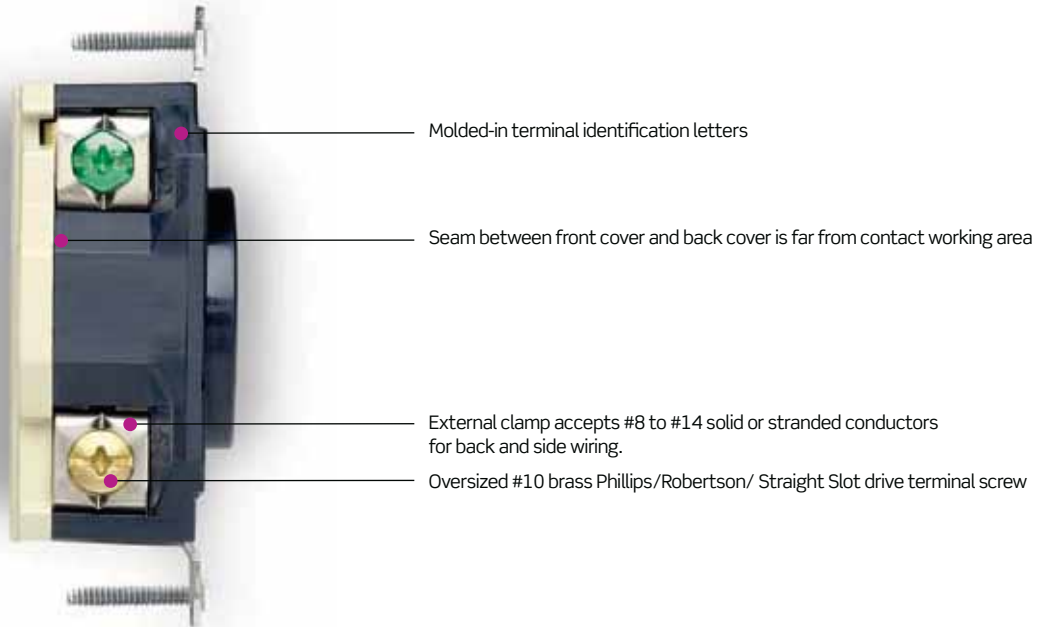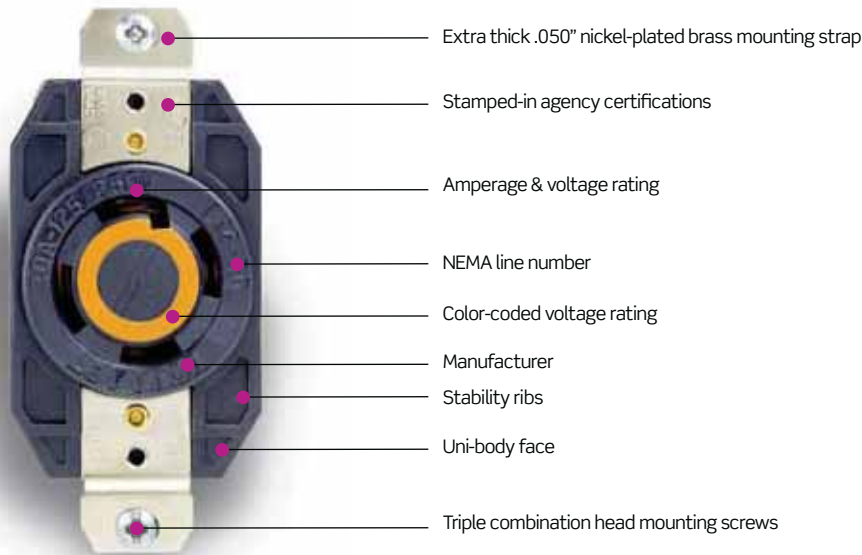

FLUSH RECEPTACLES-UL V-0 RATING

Color-Coded Voltage Ratings

125V	250V	277V AC
125/250V	3ø250V	3ø480V
	600V	

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Industrial Grade Black & White® Locking Blade Devices

Specifications and Features

- Backed by a Lifetime Warranty

Locking Plugs and Connectors

- Super tough nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring—accepts wire mesh connection strain reliefs
- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7 for 3.5 years)
- Power Indication™ 20A and 30A Locking Plugs & Connectors equipped with green LED rated at 100,000 hours (24/7 for 10 years)

Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high abuse applications
- Individual deep-funnelled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps bundle stranded wire without cutting wire strands







Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impact and harsh chemicals
- Double-wipe phosphor-bronze power contacts

V-O-Max® Locking Flush Receptacles

- UL 94 V-O Flammability Rating, the best rating of any material used in Industrial Locking Flush Receptacles available today
- Extra-thick .050" nickel-plated brass mounting strap for high-abuse applications
- Designed for maximum durability: One-piece .040" brass, high copper-content contacts with nickel plated clamp-type terminals
- Color-coded voltage rating on face for easy identification

BLACK & WHITE 15 AMP 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L5-15P	 L5-15R	 L6-15P	 L6-15R	 L7-15P	 L7-15R
Rating	15A-125V		15A-250V		15A-277V AC	
Black & White Nylon Body	4720-C	4729-C	4570-C	4579-C	4770-C	4779-C
Power Indication™	4720-PLC	4729-PLC	4570-PLC	4579-PLC	4770-PLC	4779-PLC
Black & White Nylon Body						
Angle Locking	4720-CA	—	4570-CA	—	4770-CA	—
Black & White Nylon Body						
All Black Nylon Body	4720-CB	4729-CB	—	4579-B	4770-B	4779-B
Yellow Nylon Body	4720-CY	4729-CY	4570-CY	4579-CY	4770-CY	4779-CY

Continued On Next Page >




black & white®

Industrial Grade

Continued from previous page >



4716-C

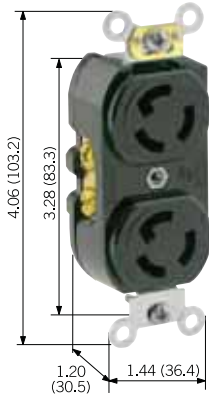

4700




7545-C

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L5-15P	L5-15R	L6-15P	L6-15R	L7-15P	L7-15R
Rating	15A-125V		15A-250V		15A-277V AC	
Flanged Device	4716-C	4715-C	4586-C	4585-C	4786-C	4785-C




Description	Cat. No.	Cat. No.	Cat. No.
NEMA			
	L5-15R	L6-15R	L7-15R
Rating	15A-125V	15A-250V	15A-277V AC
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4700	4550	4750
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired, 6" Green Ground Lead	4700-IG	4550-IG	4570-IG
Duplex Flush Receptacle w/2 Hot Feeds and 1 Neutral Return, Self Grounding, Back and Side Wired	4702-IIR	—	—
Duplex Flush Receptacle w/Split Feed - 2 Hot Feeds and 2 Neutral Returns, Self Grounding, Back and Side Wired	4703-IIR	—	—
Single Flush Receptacle	4710	4560	4760
Single Flush Receptacle, w/Short Strap	4710-SS	—	—
Single Flush Receptacle, Isolated Ground	4710-IG	4560-IG	4760-IG

2-Pole, 2-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector
NEMA		
	L1-15P	L1-15R
Rating	15A-125V	
Black and White Nylon Body	7545-C	7506-C
Flanged Outlet	—	7526-C

Description	Cat. No.
NEMA	 L1-15R
Rating	15A-125V
Duplex Flush Receptacle	7540
Single Flush Receptacle	7535

WALLPLATES AND COVERS

302 Stainless Steel Single Receptacle	302 Stainless Steel Duplex Receptacle	Weather-Resistant Flip Lid Cover For Inlets and Outlets*
1.41" Dia. Opening		1.72" Dia. Opening IP64 Rated — Includes Gasket and Screws
		
84004-40	84003-40	WP1

*For Use with 15A Locking Devices.



Related Products

For more information on Weather-Resistant Boots for 15A Locking Plugs and Connectors [see page 288](#).
For a complete listing of Wallplates and Covers [see page 707](#).

TESTING AND CODE COMPLIANCE

- Meet NEMA WD-6, ANSI C-73 requirements
- UL Fed Spec Listed WC-596 (File #E-13393 Plugs, Connectors, Flanged Inlets) (File #E-13399 Receptacles and Flanged Outlets)
- CSA Certified (File #LR-406)
- NOM Certified (#057)

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
Operating Temperature: -40°C to 60°C

ELECTRICAL

Dielectric Voltage: Withstands 2000V
Current Interr.: Full rated current
Temp. Rise: Max 30°C after 250 cycles at 200% of rated current

MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding
Terminal Accom.: #18-#10 AWG
Product I.D.: Ratings are permanently stamped on device


DEVICE TYPE

15A Locking - 2 and 3 Wire Plugs and Connectors

CORD GRIP RANGE

(.240"-.700") #18-#10 AWG

DIMENSIONS

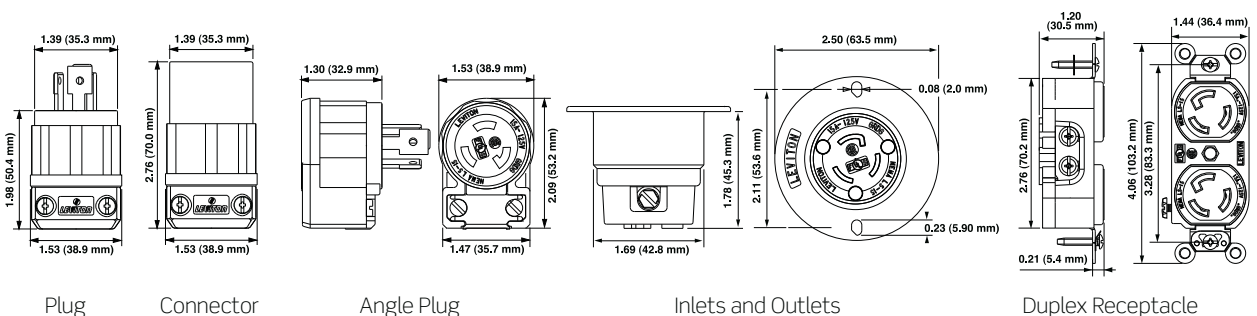

Industrial Grade


BLACK AND WHITE® 20 AMP 2-Pole, 3-Wire Grounding



2311



2313









2310

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L5-20P	L5-20R	L6-20P	L6-20R	L7-20P	L7-20R
Rating	20A-125V		20A-250V		20A-277V AC	
Black & White Nylon Body	2311	2313	2321	2323	2331	—
Power Indication™ Black & White Nylon Body	2311-PLC	2313-PLC	2321-PLC	2323-PLC	2331-PLC	2333-PLC
All Black Nylon Body	2311-B	2313-B	—	2323-B	—	2333
Power Indication All Black Nylon Body	2311-PLB	2313-PLB	—	—	—	—
Yellow Nylon Body	2311-CY	2313-CY	2321-CY	2323-CY	—	—

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L5-20P	L6-20R	L6-20P	L7-20R	L7-20P	L7-20R
Rating	20A-125V		20A-250V		20A-277V AC	
Flanged Device	2315	2316	2325	2326	2335	2336







Description	Cat. No.	Cat. No.	Cat. No.
NEMA			
	L5-20R	L6-20R	L7-20R
Rating	20A-125V	20A-250V	20A-277V AC
V-O-MAX® Single Flush Receptacle	2310	2320	2330
V-O-MAX Single Flush Receptacle, Isolated Ground	2310-IG	2320-IG	2330-IG

2-Pole, 3-Wire Grounding  

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L24-20P	 L24-20R	 L8-20P	 L8-20R	 L9-20P	 L9-20R
Rating	20A-347V AC		20A-480V AC		20A-600V AC	
Black & White Nylon Body	3721	3723	2341	2343	2351	2353







2341

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L24-20P	 L24-20R	 L8-20P	 L8-20R	 L9-20P	 L9-20R
Rating	20A-347V AC		20A-480V AC		20A-600V AC	
Locking Flanged	3755	3756	2345	2346	2355	2356





2343



Description	Cat. No.	Cat. No.	Cat. No.
NEMA	 L24-20R	 L8-20R	 L9-20R
Rating	20A-347V AC	20A-480V AC	20A-600V AC
V-O-MAX® Single Flush Receptacle	3720	2340	2350
V-O-MAX Single Flush Receptacle, Isolated Ground	—	—	2350-IG



2340

2-Pole, 2-Wire Non-Grounding  

Description	Cat. No. Plug	Cat. No. Receptacle
NEMA	 L2-20P	 L2-20R
Rating	20A-250V	20A-250V
Black & White Nylon Body	7102-C	7101-C
Non-Polarized	7102-NP	—

Description	Cat. No. Plug	Cat. No. Receptacle
NEMA	 L2-20P	 L2-20R
Rating	20A-250V	20A-250V
Single Flush Receptacle	—	7210-B



7102-C

Industrial Grade



2411



2413



2431



2433

3-Pole, 3-Wire Non-Grounding
























Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
Black & White Nylon Body	2361	2363	2371	2373	2381	2383

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L10-20P	L10-20R	L11-20P	L11-20R	L12-20P	L12-20R
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
Flanged Device	2365	2366	2375	2376	2385	2386

Description	Cat. No.	Cat. No.	Cat. No.
NEMA			
	L10-20R	L11-20R	L12-20R
Rating	20A-125/250V	20A-3Ø 250V	20A-3Ø 480V
Single Flush Receptacle	2360	2380	2380

3-Pole, 4-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L14-20P	L14-20R	L15-20P	L15-20R	L16-20P	L16-20R
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
Black & White Nylon Body	2411	2413	2421	2423	2431	2433


Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L14-20P	L14-20R	L15-20P	L15-20R	L16-20P	L16-20R
Rating	20A-125/250V		20A-3Ø 250V		20A-3Ø 480V	
Flanged Device	2415	2416	2425	2426	2435	2436
	Cat. No.		Cat. No.		Cat. No.	
NEMA						
		L14-20R		L15-20R		L16-20R
Rating		125/250V		20A-3Ø 250V		20A-3Ø 480V
V-O-MAX® Single Flush Receptacle		2410		2420		2430
V-O-MAX Single Flush Receptacle, Isolated Ground		2410-IG		2420-IG		
4-Pole, 4-Wire Non-Grounding  						
Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L18-20P	L18-20R	L19-20P	L19-20R	L20-20P	L20-20R
Rating	20A-3ØY 120/208V		20A-3ØY 277/480V		20A-3ØY 347/600V	
Black & White Nylon Body	2441	2443	2451	2453	2461	2463
Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L18-20P	L18-20R	L19-20P	L19-20R	L20-20P	L20-20R
Rating	20A-3ØY 120/208V		20A-3ØY 277/480V		20A-3ØY 347/600V	
Flanged Device	2445	2446	2455	2456	2465	2466



2416



2435






2410-IG









Related Products







For a complete listing of Wallplates and Covers [see page 707](#).




Industrial Grade

Description	Cat. No.	Cat. No.	Cat. No.
NEMA	 L18-20R	 L19-20R	 L20-20R
Rating	20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 347/600V
Single Flush Receptacle	2440	2450	2460

4-Pole, 5-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L21-20P	 L21-20R	 L22-20P	 L22-20R	 L23-20P	 L23-20R
Rating	20A-3Ø 120/208V	20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 277/480V	20A-3ØY 347/600V	20A-3ØY 347/600V
Black & White Nylon Body	2511	2513	2521	2523	2531	2533

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L21-20P	 L21-20R	 L22-20P	 L22-20R	 L23-20P	 L23-20R
Rating	20A-3ØY 120/208V	20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 277/480V	20A-3ØY 347/600V	20A-3ØY 347/600V
Flanged Device	2515	2516	2525	2526	2545	2546

Description	Cat. No.	Cat. No.	Cat. No.
NEMA	 L18-20R	 L19-20R	 L20-20R
Rating	20A-3ØY 120/208V	20A-3ØY 277/480V	20A-3ØY 347/600V
V-O-MAX® Single Flush Receptacle	2510	2520	2530
V-O-MAX Single Flush Receptacle, Isolated Ground	2510-IG		2530-IG

WALLPLATES AND COVERS

302 Stainless Steel	Weather-Resistant	Weather-Resistant	Weather-Resistant
Single Receptacle	Flip Lid Cover*	Flip Lid Cover*	Thermoplastic Cover****
1.60" Dia. Opening	2.24" Dia. Opening	1.72" Dia. Opening	Self-Closing Lid
			
84020-40	**WP2	***7420-CR ***7420-CRG (Grey)	4980-GY

*IP64 Rated. Includes Gasket and Screws

**For use with 20 + 30A 3,4 and 5 Wire Locking Flanged Inlets and Outlets.

***For use with 20A + 30A Single-Locking Receptacles.

****For receptacles. Includes Gasket and Screws.



Related Products

For more information on Weather-Resistant Boots for Locking Plugs and Connectors [see page 288](#).
For a complete listing of Wallplates and Covers [see page 707](#).

TESTING AND CODE COMPLIANCE

- Meet NEMA WD-6, ANSI C-73 requirements
- UL Fed Spec Listed WC-596 (File #E-13393 Plugs, Connectors, Flanged Inlets) (File #E-13399 Receptacles and Flanged Outlets)
- CSA Certified (File #LR-406)
- NOM Certified (#057)

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2
Operating Temperature: -40°C to 60°C

ELECTRICAL

Dielectric Voltage: Withstands 2000V for UL 498
Current Interr.: Full rated current
Temp. Rise: Max 30°C after 250 cycles at 200% of rated current

MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding
Terminal Accomm.: #18-#10 AWG
Product I.D.: Ratings are permanently stamped on device


DEVICE TYPE

20A Locking 2 and 3-Wire
20A Locking 4 and 5-Wire


CORD GRIP RANGE

(.385"-.780") #16-#10 AWG
(.595"-.895") #14-#10 AWG

DIMENSIONS

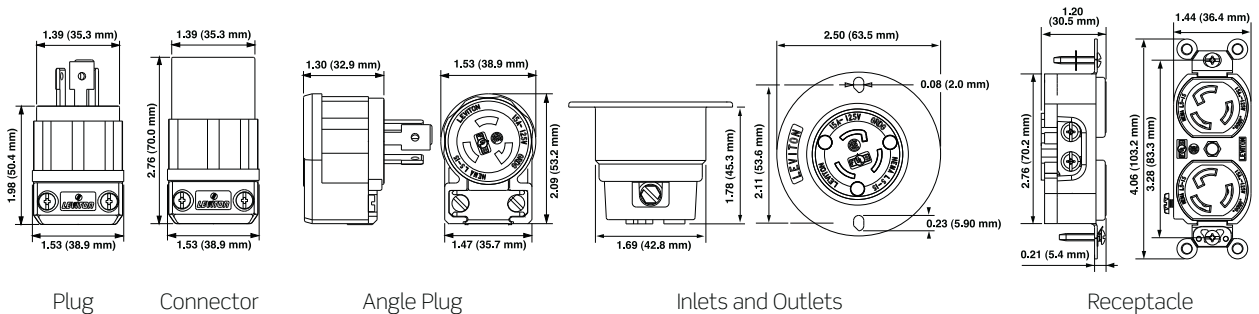

Industrial Grade



2620



2621-B








2625F







BLACK & WHITE® 30AMP 2-Pole, 3-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R
Rating	30A-125V		30A-250V		30A-277V AC	
Black & White Nylon Body	2611	2613	2621	C2623	2631	2633
Power Indication™ Black & White Nylon Body	2611-PLC	2613-PLC	2621-PLC	C2623-PLC	2631-PLC	2633-PLC
All Black Nylon Body	2611-B	2613-B	2621-B	C2623-B	—	—
Power Indication All Black Nylon Body	2611-PLB	2613-PLB	—	—	—	—
Yellow Nylon Body	2611-CY	2613-CY	2621-CY	C2623-CY	—	—
Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L5-30P	L5-30R	L6-30P	L6-30R	L7-30P	L7-30R
Rating	30A-125V		30A-250V		30A-277V AC	
Flanged Device	2615	2616	2625F	2626F	2635	2636
Description	Cat. No.		Cat. No.		Cat. No.	
NEMA						
	L5-30R		L6-30R		L7-30R	
Rating	30A-125V		30A-250V		30A-277V AC	
V-O-MAX® Single Flush Receptacle	2610		2620		2630	
V-O-MAX Single Flush Receptacle, Isolated Ground	2610-IG		2620-IG		2630-IG	
All Black	2610-B		2620-B			

2-Pole, 3-Wire Grounding  









Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L8-30P	 L8-30R	 L9-30P	 L9-30R
Rating	30A-480V AC		30A-600V AC	
Black & White Nylon Body	2641	2643	C2651	C2653



Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L8-30P	 L8-30R	 L9-30P	 L9-30R
Rating	30A-480V AC		30A-600V AC	
Flanged Device	2645	2646	2655	2656
NEMA		 L8-30R		 L9-30R
Rating		30A-480V AC		30A-600V AC
V-O-MAX® Receptacle		2640		2650



3-Pole, 3-Wire Non-Grounding  

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L10-30P	 L10-30R	 L11-30P	 L11-30R
Rating	30A- 125/250V		30A- 3Ø 250V	
Black & White Nylon Body	2661	2663	2671	2673
Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L10-30P	 L10-30R	 L11-30P	 L11-30R
Rating	30A- 125/250V		30A- 3Ø 250V	
Flanged Device	2665	2666	2675	2676





Continued On Next Page >





Industrial Grade



Continued From Previous Page >

Description	Cat. No.	Cat. No.
NEMA	 L10-30R	 L11-30R
Rating	30A-125/250V	30A-3Ø 250V
V-O-MAX®	2660	—
Single Flush Receptacle	—	2670
Single Flush Receptacle	—	2670





3-Pole, 3-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L12-30P	 L12-30R	 L13-30P	 L13-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Black & White	2681	2683	2691	2693
Nylon Body				

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L12-30P	 L12-30R	 L13-30P	 L13-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Flanged Device	2685	2686	2691	2693

Description	Cat. No.	Cat. No.
NEMA	 L12-30R	 L13-30R
Rating	30A-3Ø 480V	30A-3Ø 600V
Single Flush Receptacle	2680	2690

3-Pole, 4-Wire Grounding





Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L14-30P	 L14-30R	 L15-30P	 L15-30R
Rating	30A-125/250V		30A-3Ø 250V	
Black & White	2711	2713	2721	2723
Nylon Body				
All Black	2711-B	2713-B	2721-B	2723-B
Yellow Nylon Body	—	2713-CY	—	—




2711





2713

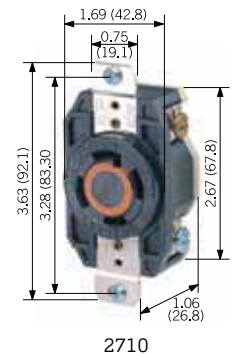Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L14-30P	 L14-30R	 L15-30P	 L15-30R
Rating	30A-125/250V		30A-3Ø 250V	
Flanged Device	2715	2716	2725	2726







2710





Description	Cat. No.	Cat. No.
NEMA	 L14-30R	 L15-30R
Rating	30A-125/250V	30A-3Ø 250V
V-O-MAX® Single Flush Receptacle	2710	2720
V-O-MAX Single Flush Receptacle, Isolated Ground	2710-IG	2720-IG
All Black	2710-B	—



2715

3-Pole, 4-Wire Grounding



Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA	 L16-30P	 L16-30R	 L17-30P	 L17-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Black & White Nylon Body	2731	2733	2741	2743
All Black	2731-B	2733-B	—	—

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA	 L16-30P	 L16-30R	 L17-30P	 L17-30R
Rating	30A-3Ø 480V		30A-3Ø 600V	
Flanged Device	2735	2736	2745	2746







Continued On Next Page >







Industrial Grade




Continued From Previous Page >

Description	Cat. No.	Cat. No.
NEMA		
	L16-30R	L17-30R
Rating	30A-3Ø 480V	30A-3Ø 600V
V-O-MAX® Single Flush Receptacle	2730	2740
V-O-MAX Single Flush Receptacle, Isolated Ground	2730-IG	2740-IG
All Black	2730-B	







4-Pole, 4-Wire Non-Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L18-30P	L18-30R	L19-30P	L19-30R	L20-30P	L20-30R
Rating	30A- 3ØY 120/208V		30A- 3ØY 277/480V		30A- 3ØY 347/600	
Black & White Nylon Body	2751	2753	2761	2763	2771	2773

Description	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet	Cat. No. Inlet	Cat. No. Outlet
NEMA						
	L18-30P	L18-30R	L19-30P	L19-30R	L20-30P	L20-30R
Rating	30A- 3ØY 120/208V		30A- 3ØY 277/480V		30A- 3ØY 347/600	
Flanged Device	2755	2756	2765	2766	2775	2776

Description	Cat. No.	Cat. No.	Cat. No.
NEMA			
	L18-30R	L19-30R	L20-30R
Rating	30A- 3ØY 120/208V	30A- 3ØY 277/480V	30A- 3ØY 347/600
Single Flush Receptacle	2750	2760	2770

4-Pole, 5-Wire Grounding

Description	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector	Cat. No. Plug	Cat. No. Connector
NEMA						
	L21-30P	L21-30R	L22-30P	L22-30R	L23-30P	L23-30R
Rating	30A-3ØY 120/208V		30A-3ØY 277/480V		30A-3ØY 347/600V	
Black & White Nylon Body	2811	2813	2821	2823	2831	2833



2811



2813