

## Industrial Grade

### Heavy-Duty Industrial Grade Receptacles

Leviton's line of Heavy-Duty Industrial Grade receptacles are available with a number of wiring options and features. The beauty, durability and versatility of Decora® devices and surge suppression receptacles are perfect for a variety of industrial applications.

#### Specifications and Features

- Engineered for fine appearance and top performance in demanding commercial and institutional applications using a durable, thermoplastic face and impact-resistant construction
- Shallow design for maximum wiring room in wallbox
- Back Wire and Side Wire terminal wiring options for ease of installation
- Heavy-gauge zinc-plated steel locked-in wrap-around strap
- Triple-wipe brass contacts for long service life
- Exclusive V-shaped, serrated back wiring clamps for superior contact and conductivity
- Available in an array of colors to coordinate with any interior
- Backed by a Limited Ten-Year Warranty

#### Decora Plus™ Back and Side Wired/Wire Lead Receptacles

- Back Wire and Side Wire terminal options
- Heavy-gauge zinc-plated steel locked-in wrap around strap
- Terminal screws accept up to No. 10 copper or copper-clad wire, solid or stranded
- Back wire terminals accept up to No. 10 copper or copper-clad wire, solid or stranded
- Labor-saving self-grounding clip
- Heavy-duty triple-wipe brass contacts for long service life
- Impact-resistant thermoplastic construction
- Back and side wiring terminals permit fast installation of up to No. 10 solid or stranded conductors
- Triple-wipe copper alloy contacts ensure maximum conductivity


Brass self-grounding clip

Heavy-Duty Triple-wipe brass contacts for long service life

Heavy-gauge zinc-plated steel locked-in wrap-around strap



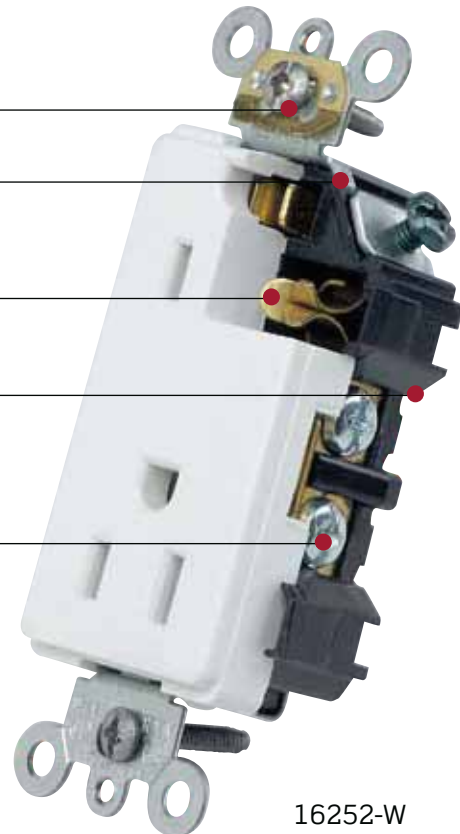

Back and side wiring holes accept No. 10 or No. 14 copper or copper-clad wire


Combination triple-drive Brass #10-32 screws  
(Standard, Phillips, Robertson) for fast installation



16252-W

### DECORA PLUS™ HEAVY-DUTY SPEC GRADE RECEPTACLES

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>					
		5-15R	5-20R	6-15R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>20A-125V</b>	<b>15A-250V</b>	<b>20A-250V</b>
Duplex	White	16262-W	16362-W	16662-W	16462-W
	Ivory	16262-I	16362-I	16662-I	16462-I
	Light Almond	16262-T	16362-T	—	—
	Gray	16262-GY	16362-GY	—	—
	Black	16262-E	16362-E	—	—
	Brown	16262	16362	—	—
Duplex, with 6" wire leads	White	16252-LW	16352-LW	—	—
	Ivory	16252-LI	16352-LI	—	—
	Almond	16252-LA	16352-LA	—	—
	Gray	16252-LGY	16352-LGY	—	—
	Black	16252-LE	16352LE	—	—
	Brown	16252-L	16352-L	—	—

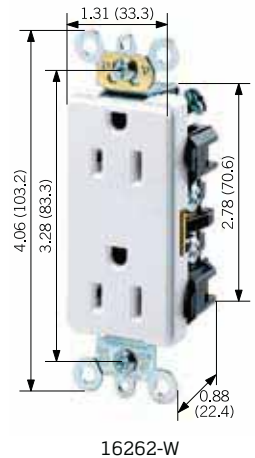

#### TESTING AND CODE COMPLIANCE

- Meets all NEMA WD 6, UL 498 and ANSI C-73 requirements
- UL Listed (File #E-13399)
  - CSA Certified (File #152105)
  - NOM Certified (#057)

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
 Operating Temperature: -40°C to 60°C

#### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
 Terminal Accomm.: #14-#10 AWG  
 Product I.D.: Ratings are permanently stamped on device

#### ELECTRICAL

Dielectric Voltage: Withstands 2000V for UL 498  
 Current Interr.: Full rated current  
 Temp. Rise: Max 30°C after 250 cycles at 200% of rated current

#### HORSEPOWER


15A - 125V — 1/2  
 15A - 250V — 1 1/2  
 20A - 125V — 1  
 20A - 250V — 2

## Industrial Grade


### Spec Grade Receptacles, Back and Side Wired/Wire Lead

#### Specifications and Features

- Impact-resistant thermoplastic nylon cover and body
- Smooth face does not collect dirt
- Four corner latches securely fasten face
- Single-piece brass mounting strap on Extra Heavy-Duty devices, multi-piece steel strap on Heavy-Duty devices
- Large, triple-wipe, brass “T” contacts for superior contact and conductivity
- Back and side-wiring options
- Brass terminal screws to reduce conductor oxidation
- Break-off tabs for easy two-circuit conversion
- Apron barrier to prevent accidental contact between terminal screw heads and metal box
- Exclusive V-shaped, serrated back-wiring clamps for superior contact and conductivity
- Wire lead receptacles for fast and easy installation
- Backed by a Limited 10-Year Warranty

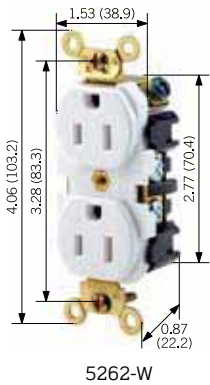





5262-W

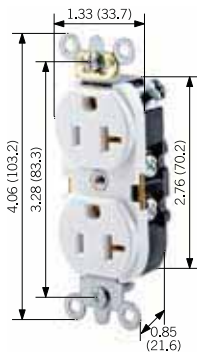


5362-SW


#### Back and Side Wired, Self-Grounding, Fed Spec

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>					
		5-15R	6-15R	5-20R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>	<b>20A-125V</b>	<b>20A-250V</b>
Extra Heavy-Duty Duplex, Brass Strap with Integral Ground Contacts	White	5262-W	—	5362-W	—
	Ivory	5262-I	5662-I	5362-I	5462-I
	Gray	5262-GY	—	5632-GY	5462-GY
	Black	5262-E	—	5362-E	—
	Brown	5262	5662	5362	5462
	Red	5262-R	—	5362-R	—
Heavy-Duty Single	White	5261-W	—	5361-W	5461-W
	Ivory	5261-I	5661-I	5361-I	5461-I
	Light Almond	—	—	5361-T	5461-T
	Gray	5261-GY	—	5361-GY	5461-GY
	Black	—	—	5361-E	—
	Brown	5261	5661	5361	5461
	Red	5261-R	—	5361-R	5461-R
Heavy-Duty Duplex	White	5252-W	—	5352-W	—
	Ivory	5252-I	—	5352-I	—
	Light Almond	5252-T	—	5352-T	—
	Gray	5252-GY	—	5352-GY	—
	Black	5252-E	—	5352-E	—
	Brown	5252	—	5352	—
	Red	5252-R	—	5352-R	—
	Blue	5252-BU	—	5352-BU	—
Single, Clock Hanger	Stainless Steel	5261-CH	—	5361-CH	—

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>					
		5-15R	6-15R	5-20R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>	<b>20A-125V</b>	<b>20A-250V</b>
Heavy-Duty Spec Grade Duplex	White	5262-SW	—	5362-SW	—
	Ivory	5262-SI	—	5362-SI	—
	Almond	5262-SA	—	5362-SA	—
	Light Almond	5262-ST	—	5362-ST	—
	Grey	5262-SGY	—	5362-SGY	—
	Black	5262-SE	—	5362-SE	—
	Brown	5262-S	—	5362-S	—
	Red	5262-SR	—	5362-SR	—
	Blue	5262-SBU	—	5362-SBU	—
Heavy-Duty Spec Grade, Duplex, with 6" wire leads	White	5262-LW	—	5362-LW	—
	Ivory	5262-LI	—	5362-LI	—
	Light Almond	—	—	5362-LT	—
	Grey	5262-LGY	—	5362-LGY	—
	Black	5262-LE	—	5362-LE	—
	Brown	5262-L	—	5362-L	—
	Red	5262-LR	—	5362-LR	—
Heavy-Duty Spec Grade Duplex, with 6" wire leads, no ground led and self grounding clip	White	5262-CW	—	5362-CW	—
	Ivory	5262-CI	—	5362-CI	—
	Grey	5262-CG	—	5362-CG	—







5362-IG



5242-W

**Back and Side Wired, Isolated Ground, Fed Spec**  

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>					
		5-15R	6-15R	5-20R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>	<b>20A-125V</b>	<b>20A-250V</b>
Heavy-Duty Spec Grade, Duplex	White	5262-IGW	—	5362-IGW	—
	Ivory	5262-IGI	—	5362-IGI	—
	Light Almond	5262-IGT	—	5362-IGT	—
	Gray	5262-IGG	—	5362-IGG	—
	Brown	5262-IGB	—	5362-IGB	—
	Red	5262-IGR	—	5362-IGR	—
	Blue	—	—	5362-BIG	—
	Orange	5262-IG	5662-IG	5362-IG	5462-IG
Single	Orange	5261-IG	—	5361-IG	—

## Industrial Grade

### Side Wired, Fed Spec

Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>		5-15R	6-15R	5-20R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>	<b>20A-125V</b>	—
Heavy-Duty Spec Grade, Duplex	White	5242-W	—	5342-W	—
	Ivory	5242-I	—	5342-I	—
	Grey	5242-GY	—	5342-GY	—
	Brown	5242	—	5342	—
	Red	5242-R	—	5342-R	—
Single	White	—	5651-W	—	—
	Ivory	5251-I	5651-I	5351-I	—
	Brown	5251	5651	5351	—

### Dual Voltage, Back and Side Wired

Description	Color	Cat. No.	Cat. No.
<b>NEMA</b>		5-15R	6-15R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>
Heavy-Duty Spec Grade, Duplex	Ivory	5292-I	
	Brown	5292	

#### TESTING AND CODE COMPLIANCE

- Meets all NEMA WD 6, UL 498 and ANSI C-73 requirements
- UL Listed (File #E-13399)
  - CSA Certified (File #152105)
  - NOM Certified (#057)

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
 Operating Temperature: -40°C to 60°C

#### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
 Terminal Accom.: #14-#10 AWG  
 Product I.D.: Ratings are permanently stamped on device


#### ELECTRICAL

Dielectric Voltage: Withstands 2000V for UL 498  
 Current Interr.: Full rated current  
 Temp. Rise: Max 30°C after 250 cycles at 200% of rated current


#### HORSEPOWER

15A - 125V — 1/2  
 15A - 250V — 1 1/2  
 20A - 125V — 1  
 20A - 250V — 2


**DIMENSIONS**

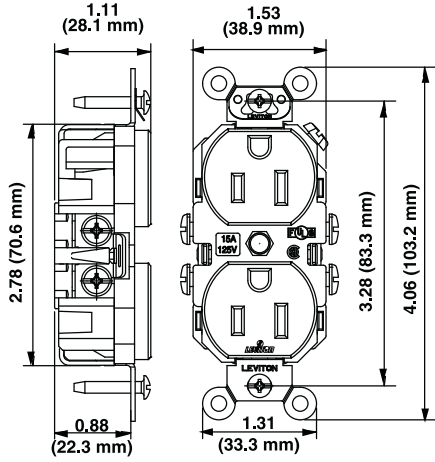


5262, 5362

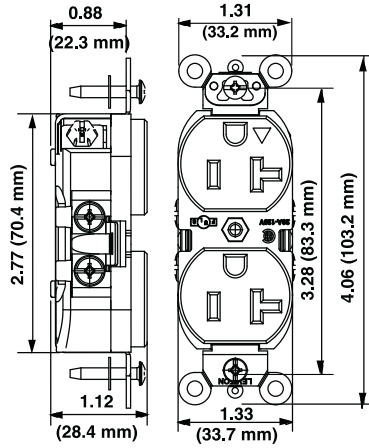


5262-IG, 5662-IG,  
5362-IG, 5462-IG

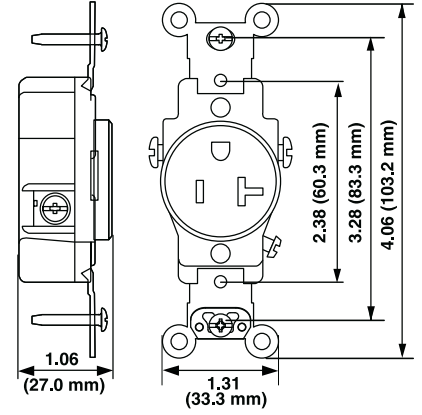

5261, 5661,  
5361, 5461

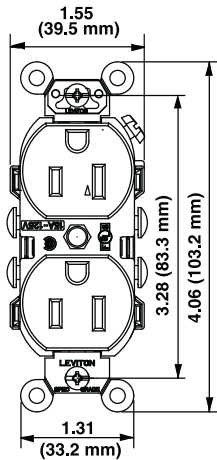

5252, 5352,  
5462, 5662

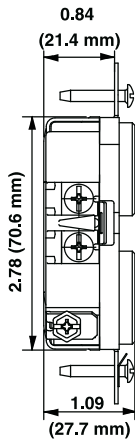

5262-S, 5362-S

