

### Decora® LED Sensor Guide Lights

Our new LED Sensor Guide Light Series unites Leviton's quality Decora wiring devices with energy-saving LED Guide Lights for a smart combination. The Sensor LEDs turn ON and OFF automatically in Switch/Guide Light or Tamper-resistant Receptacle/Guide Light combinations, as well as a full LED Guide Light version that's perfect for hallways or stairways.

#### Specifications and Features

##### All Devices

- Impact-resistant face and body
- Long-lasting energy-efficient LED with long life expectancy — no bulbs to replace
- Light sensor provides automatic ON/OFF features
- All devices have a self grounding clip
- Fits standard wall boxes
- Back or side wired

##### Tamper Resistant Receptacle/Guide Light

- Uses two LEDs
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure foreign objects will be locked out
- Complies with section 406.11 of the 2008 NEC Code

##### Combination Switch/Guide Light

- Uses two LEDs
- Single Pole
- Neutral Required

##### Full LED Guide Light

- Uses three LEDs
- Color Change Kits available for select models

### COLORS

Decora devices are offered in a wide range of colors and finishes. To order colors, add suffix to Cat No.



White  
(-W)



Ivory  
(-I)




Almond  
(-A)




Light Almond  
(-T)

## Residential Grade

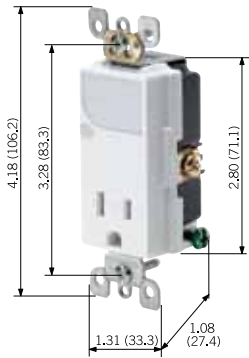

T6525

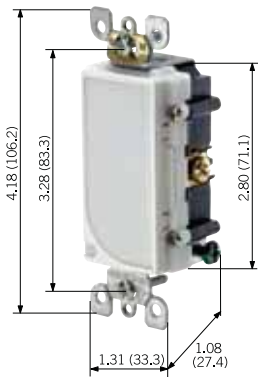

6527

### DECORA® COMBINATION DEVICES\*

Description	Color	Cat No.
<b>NEMA</b>		 5-15R
<b>Rating</b>		<b>15A-125VAC</b>
Decora Tamper Resistant Receptacle/LED Guide Light	White	T6525-W
	Ivory	T6525-I
	Almond	T6525-A
	Light Almond	T6525-T
<b>Rating</b>		<b>15A-125VAC</b>
Decora Single Pole Switch/LED Guide Light	White	6526-W
	Ivory	6526-I
	Almond	6526-A
	Light Almond	6526-T
<b>Rating</b>		<b>1W-120VAC</b>
Decora Full LED Guide Light	White	6527-W
	Ivory	6527-I
	Almond	6527-A
	Light Almond	6527-T

#### TESTING AND CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)


#### MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 120°C



#### HORSEPOWER

- 15A — 1/2 @ 120V

## DIMENSIONS

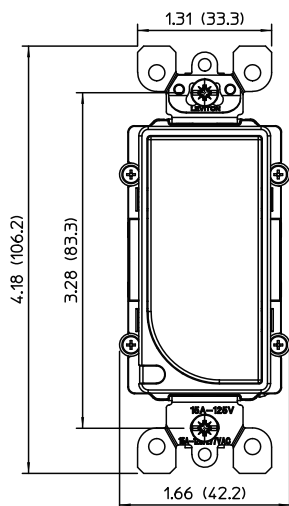

Decora 6527  
Full LED Guidelight

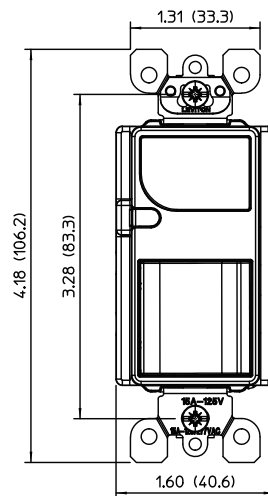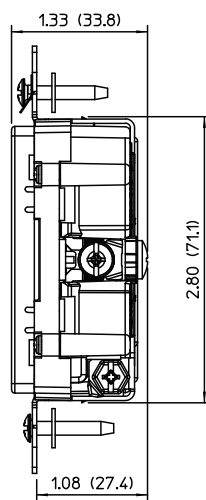

Decora 6526  
Switch LED Guidelight

