



20A 120/277V AC

LEVITON®

Commercial Grade, Back & Side Wired

10 YEAR LIMITED WARRANTY

ELECTRICAL			
DIELECTRIC VOLTAGE	OVERLOAD UL 20 TEST	TEMP. RISE	ENDURANCE
Withstands 1500V for 1min	100 cycles of overload at 4.8 times rated current	30°C max at full rated current	UL 20/Fed Spec 50,000 cycles min., tungsten filament lamp load (Fed. Spec.) WS896E, SP, DP, 3-way, 4-way, Pilot Light, Illum., Key Lock

ENVIRONMENTAL	
FLAMMABILITY	OPERATING TEMP.
Rated V-2 per UL 94	-40°C to 65°C

STANDARDS & CERTIFICATION					
NEMA WD1 & WD6	ANSI C-73	UL 20	UL Fed Spec WS896E	CSA C22.2 No. 111	NOM
✓	✓	#E7458	#E7458	#152105	#057

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	TORQUE RANGE
Brass-Hot, Black-Hot, White-Neutral, Green-Grounding	#14-#10 AWG back wired #14-#12 AWG side wired	Ratings are permanently stamped on device strap	12-14 inch pounds

AC HORSEPOWER RATINGS
15 AMP
1@120V
16 AMP MAX



PLUS DECORA

Illuminated Illuminated when load is OFF. Does not require a neutral wire.


TOGGLE COLOR	SINGLE-POLE 120V	3-WAY 120V	SINGLE-POLE 277V	3-WAY 277V
20 AMP				
Ivory	5631-2I	5633-2I	5649-2I	-
White	5631-2W	5633-2W	5649-2W	5659-2W
Ebony	5631-2E	-	-	-
Almond	5631-2A	5633-2A	-	-
Light Almond	5631-2T	5633-2T	-	-

Pilot Light Illuminated when load is ON. Requires a neutral wire.

TOGGLE COLOR	SINGLE-POLE 120V	3-WAY 120V	SINGLE-POLE 277V	3-WAY 277V
20 AMP				
Ivory	5628-2I	5638-2I	5629-2I	-
White	5628-2W	5638-2W	5629-2W	5639-2W
Almond	5628-2A	5638-2A	-	-
Light Almond	5628-2T	-	-	-

SCREWLESS SNAP-ON WALLPLATES		NYLON WALLPLATES		302 STAINLESS STEEL WALLPLATES	
80301-I	80309-I	80401-NE	80409-NE	84409-40	84411-40

FOR ADDITIONAL WALLPLATE OPTIONS SEE SECTION Q

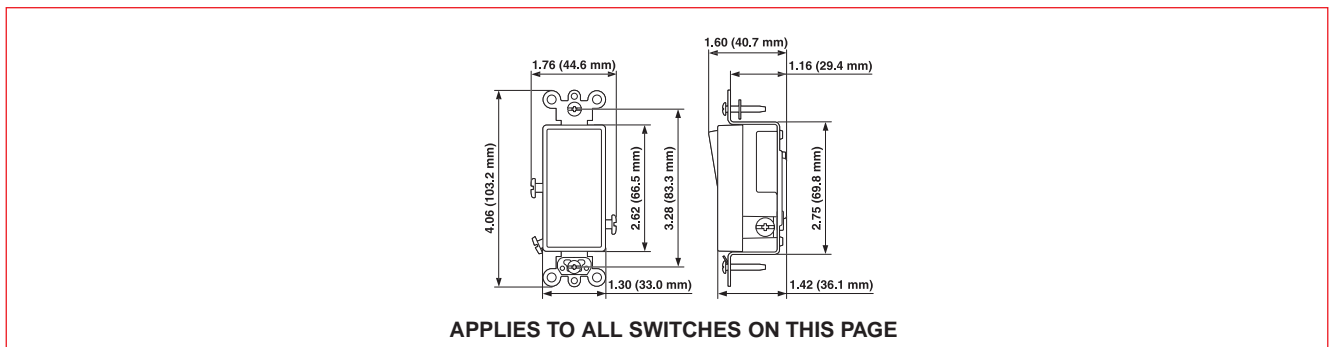

Commercial Grade Illuminated & Pilot Light AC Switches

