


## Decora Plus 20 Ampere Straight Blade Receptacle 2-Pole, 3-Wire Grounding

### APPLICATION:

In accordance with the NEC, this device is suitable for use on up to 20 ampere, 125 volt branch circuits in residential installations.

### DECORA PLUS RESIDENTIAL GRADE DUPLEX RECEPTACLE 2-POLE, 3-WIRE

**DECORA PLUS**  
FOR RESIDENTIAL APPLICATIONS


Description	Color	 20A 125V NEMA 5-20R CSA Config
Decora Plus Duplex Receptacle, smooth face, multi-piece steel strap, side wired	Ivory	DR20-I
	White	DR20-W

### TYPICAL SPECIFICATION

Straight blade 20 ampere 2-pole, 3-wire grounding, side wire duplex receptacle shall be Leviton Decora Plus, with Decora-style opening, CSA Certified, with rating and colors as scheduled on plan.

### FEATURES

- Constructed of impact-resistant thermoplastic cover and body with face locked into base by four corner latches to remain securely fastened
- Has a .042" thick pre-plated locked-in steel mounting strap
- .031 brass ground contacts for superior ground conductivity
- Provide dual ground connection option via integral green grounding screw and patented Groundamatic brass self-grounding clip riveted to the strap for automatic ground connection when mounted in a properly grounded metal wall box.
- Side wiring accepts No. 10 to 14 AWG solid or stranded wire.
- Smooth Decora-style face does not collect dirt and is easy to clean
- Convenient break-off tabs allow easy two-circuit conversion
- Limited One Year Warranty
- CSA Certified

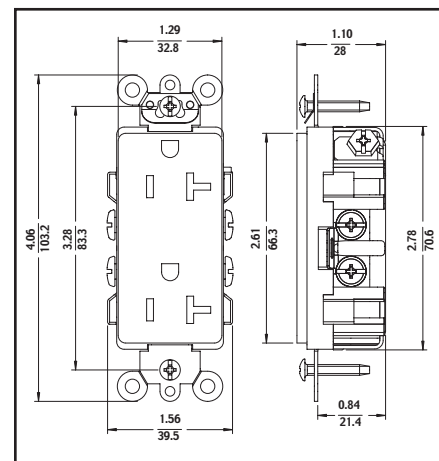

Cat. No. DR20

DR20

# Product Specifications

**DR20**

.....

## PERFORMANCE SPECIFICATIONS:

### Electrical

Dielectric Voltage Withstand:	2,000V minimum
Maximum Working Voltage:	125V
Current Interrupting:	Certified for current interrupting at full-rated current
Temperature Rise:	Maximum 30°C temperature rise at full-rated current after 50 cycles at 150% of rated current

### Mechanical

Terminal Identification:	Terminals identified in accordance with UL 498 (brass, white & green)
Terminal Accommodation:	#14 gauge through #10 gauge solid or stranded wire
Product Identification:	Ratings are a permanent part of device housing

### Environmental

Flammability:	Rated V2
Operating Temperature:	From -40°C (without impact) to 60°C max. continuous

## TESTING AND CODE COMPLIANCE

CSA Certified where applicable

### LIMITED 1 YEAR WARRANTY AND EXCLUSIONS

**1 YEAR LIMITED WARRANTY**

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship and will remain free of such defects under normal and proper use for one year from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such one year period the product is returned prepaid, with proof of purchase date, and a description of the problem to Leviton Manufacturing Co., Inc., Attn: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591. This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to one year. Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits arising from delay or failure to perform this warranty obligation. The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

Leviton Manufacturing Of Canada  
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 Telephone: 1-800-469-7890 • FAX: 1-800-563-1853



*Building a Connected World*

Visit our Website at: [www.leviton.com](http://www.leviton.com)

C-662/F3 tp