

SIRIUS CABLE-OPERATED SWITCH METAL ENCLOSURE;
2XM20X1.5 1NO+1NC, WITHOUT LATCH CABLE-OPERATED
FUNCTION ONLY MAX. ACTUATING FORCE 80N ACTUATING
FORCE 80N MAX.



Figure similar

Product designation	cable-operated switch
General technical data:	
Protection class IP	IP65
Equipment marking	
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 • acc. to DIN EN 81346-2 	<p>S</p> <p>S</p>
Enclosure:	
Material of the enclosure	metal
Product component	
<ul style="list-style-type: none"> • EMERGENCY STOP device 	No
Color	
<ul style="list-style-type: none"> • of top part of the enclosure 	grey
Ambient conditions:	
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +70 °C
Installation/ mounting/ dimensions:	
Mounting type	screw fixing

Height	164.5 mm
Width	52 mm
Depth	42.5 mm

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Shipping Approval
 CCC	 EAC	 EG-Konf.
		 ABS
		 LRS
		 PRS

Shipping Approval



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SE71202DD01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE71202DD01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SE71202DD01&lang=en

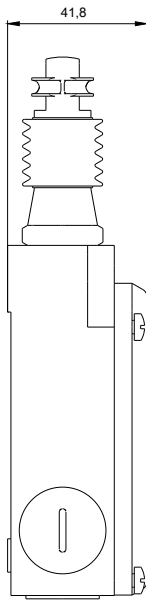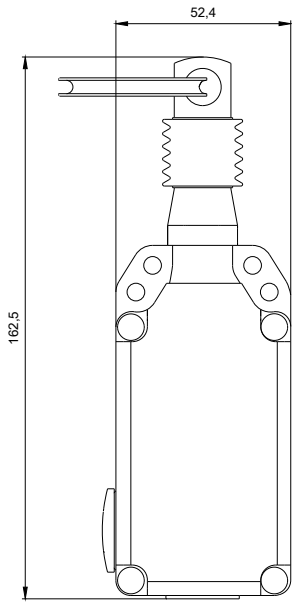

W8.4444: 3SE7120-2DD01_ALL

last modified:

22.07.2015