


Category 6 Cable

HDPE/PVC

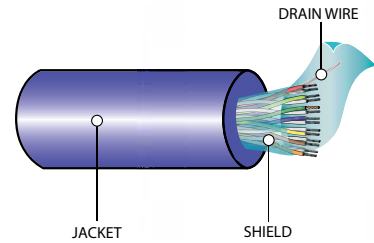

SPECIFICATIONS

- CSA FT4/CMR or FT6*/CMP
- ANSI/TIA/EIA 568 B.2-1
- ANSI/TIA/EIA 862
- RoHS Compliant

-Refer to CE Code for details

CONSTRUCTION

Conductor: Solid bare annealed copper

Insulation: Polyolefin, Fluoropolymer, or high density Polyethylene (HDPE)

Shield: Polyester-Individual aluminum foil shield pairs

Drain Wire: Tinned copper (optional)

Outer Jacket: Flame-retardant Polyvinyl Chloride (PVC)

Options: Other coloured outer jackets available upon request
Individual or overall shielded pairs available upon request

Part Number	AWG Size		Approximate Diameter		Cable Weight		Minimum Bend Radius (in.)	Maximum Pulling Force (LB)	Insulation	Shield	Colour
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM					
13055-04-1040G	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	Blue
13055-04-1020G	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	White
13055-04-1070G	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	Yellow
13055-04-1050G	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	Green
13055-04-1026G*	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	White
13055-04-1106G*	4	23	0.205	5.207	28	42	1	32	Polyolefin	No	Purple
13055-04-1046G	4	23	0.200	5.080	28	42	1	32	Fluoropolymer	No	Blue
13075-04-1040	4	23	0.276	7.010	33	49	N/A	N/A	HDPE	Yes	Blue

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.