


Bare Copper Conductor

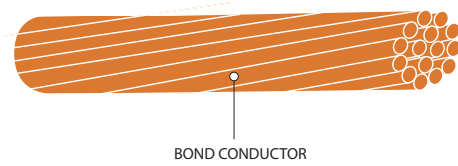

SPECIFICATIONS

• ASTM

*Refer to CE Code for details

CONSTRUCTION

Conductor: Soft, annealed solid or stranded bare copper

Options: Various tempers such as medium or hard drawn upon request

Tinned available in select AWG sizes

Part Number	AWG Size	Number of Strands	Individual Wire Diameter (in.)	Net Weight	
				LB/MFT	KG/KM
25035-05-000	14	Solid	0.064	13	19
25035-07-000	10	Solid	0.102	31	46
25035-08-000	8	Solid	0.129	49	73
25035-09-000	6	Solid	0.162	70	104
25035-10-000	4	Solid	0.202	126	188
25042-05-000	14	7	0.071	14	21
25042-06-000	12	7	0.089	20	30
25042-07-000	10	7	0.113	32	48
25042-08-000	8	7	0.142	51	76
25042-09-000	6	7	0.178	81	121
25042-10-000	4	7	0.225	129	192
25042-11-000	3	7	0.252	167	249
25042-12-000	2	7	0.283	205	305
25040-11-000	1	19	0.322	259	385
25040-14-000	1/0	19	0.362	326	485
25040-15-000	2/0	19	0.405	411	612
25040-16-000	3/0	19	0.456	518	771
25040-17-000	4/0	19	0.512	643	957
25040-18-000	250	37	0.558	772	1149

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity