


Category 3 Cable

PVC/PVC

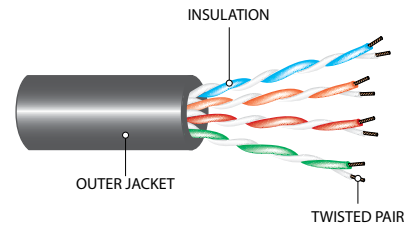

SPECIFICATIONS

- Riser Cable - CMR
- Plenum Cable - CMP
- ANSI/ICEA S-90-661
- ANSI/TIA/EIA 568 B.2
- NEC/CEC Type CMR
- RoHS Compliant

-Refer to CE Code for details

CONSTRUCTION

- Conductor:** Solid bare annealed copper
- Insulation:** Flame-retardant semi-rigid Polyvinyl Chloride (PVC)
- Outer Jacket:** Flame-retardant Polyvinyl Chloride (PVC)
- Options:** Other coloured outer jackets available upon request
Armoured versions available upon request

Riser

Part Number	AWG Size		Approximate Diameter		Cable Weight	
	Pairs	Cond.	in.	mm.	LB/ MFT	KG/KM
13053-02-090	2	24	0.140	3.556	9	13
13053-03-090	3	24	0.150	3.810	13	19
13053-04-090	4	24	0.170	4.318	16	24
13053-06-090	6	24	0.210	5.334	23	34
13053-12-090	12	24	0.270	6.858	47	70
13053-25-090	25	24	0.420	10.668	105	156
13053-50-090	50	24	0.560	14.224	185	275
13053-100-090	100	24	0.740	18.796	375	558
13053-200-090	200	24	1.020	25.908	724	1077
13053-300-090	300	24	1.230	31.242	1077	1603

Plenum

Part Number	AWG Size		Approximate Diameter		Cable Weight	
	Pairs	Cond.	in.	mm.	LB/ MFT	KG/KM
13053-02-096	2	24	0.130	3.302	10	15
13053-03-026	3	24	0.150	3.810	13	19
13053-04-096	4	24	0.160	4.064	17	25
13053-06-096	6	24	0.180	4.572	24	36
13053-25-026	25	24	0.420	10.668	102	152
13053-50-096	50	24	0.590	14.986	220	327
13053-100-096	100	24	0.840	21.336	440	655

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.