


Category 5E Cable

PVC

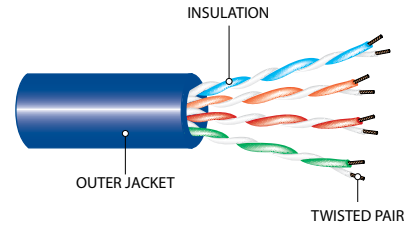

SPECIFICATIONS

- Riser Cable - CMR
- Plenum Cable - CMP
- ANSI/ICEA S-90-661
- ANSI/TIA/EIA 568 B.2
- NEC/CEC Type CMR
- RoHS Compliant

-Refer to CE Code for details

CONSTRUCTION

Conductor: Solid bare annealed copper

Insulation: Polyolefin or Fluoropolymer

Shield: Polyester-backed aluminum foil (if applicable - see table below for applicability)

Outer Jacket: Flame-retardant Polyvinyl Chloride (PVC)

Options: Other coloured outer jackets available upon request

Armoured versions available upon request

Riser

Part Number	AWG Size		Approximate Diameter		Cable Weight		Minimum Bend Radius (in)	Maximum Pulling Force (lbs)	Shield	Colour
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM				
13055-04-5E4G	4	24	0.200	5.080	21	31	1	25	No	Blue
13075-04-5E40	4	24	0.250	6.350	36	54	1	25	Yes	Blue
13055-04-5E2G	4	24	0.200	5.080	21	31	1	25	No	White
13055-04-5E7G	4	24	0.200	5.080	21	31	1	25	No	Yellow
13055-04-5E5G	4	24	0.200	5.080	21	31	1	25	No	Green
13055-04-5E100G	4	24	0.200	5.080	21	31	1	25	No	Purple
13055-04-5E10G	4	24	0.200	5.080	21	31	1	25	No	Black
13055-04-5E9G	4	24	0.200	5.080	21	31	1	25	No	Grey
13055-04-5E3G	4	24	0.200	5.080	21	31	1	25	No	Red

Plenum

Part Number	AWG Size		Approximate Diameter		Cable Weight		Minimum Bend Radius (in)	Maximum Pulling Force (lbs)	Shield	Colour
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM				
13055-04-5E46G	4	24	0.180	4.572	19	28	1	25	No	Blue
13075-04-5E46G	4	24	0.225	5.715	32	48	1	25	Yes	Blue
13055-04-5E26G	4	24	0.200	5.080	21	31	1	25	No	White

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.