



SEW 600V
Silicone Rubber

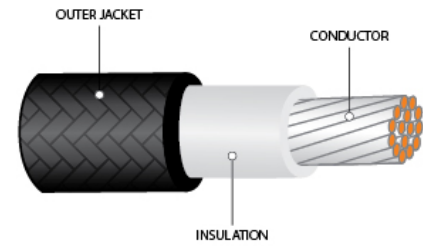

SPECIFICATIONS

- CSA approved
- CSA AWM 1
- RoHS


*Refer to CE Code for details


CONSTRUCTION

Conductor: Flexible stranded tinned, annealed copper
Insulation: Silicone rubber with a fiberglass braid jacket applied over top, treated with a high temperature lacquer finish.
Conductor Temperature: 200°C
Options: Other coloured outer jackets available upon request

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM
17042-11-010	1	14	1 x 14	0.030	0.762	0.150	3.810	22	33
17042-12-010	1	12	1 x 12	0.030	0.762	0.170	4.318	32	48
17042-13-010	1	10	1 x 10	0.045	1.143	0.230	5.842	54	80
17042-14-010	1	8	54 x 25	0.060	1.524	0.305	7.747	93	138
17042-14-011	1	8	19 x 21	0.060	1.524	0.305	7.747	93	138

SEWF 600V
Silicone Rubber

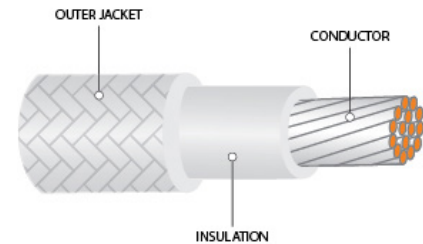

SPECIFICATIONS

- CSA approved
 - CSA AWM 1
- *Refer to CE Code for details



CONSTRUCTION

Conductor: Flexible stranded tinned, annealed copper
Insulation: Silicone rubber with a fiberglass braid jacket applied over top, treated with a high temperature lacquer finish.
Conductor Temperature: 150°C
Options: Other twisted colours available upon request

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM
17045-05-010	1	14	41/.0100	0.030	0.762	0.150	3.810	22	33
17045-08-020	1	8	133/.0111	0.060	1.524	0.305	7.747	93	138

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

* Refer to CEC for Ampacity.

SEW & SEWF 600V