


General Purpose Paired

Overall Foil Shielded Solid

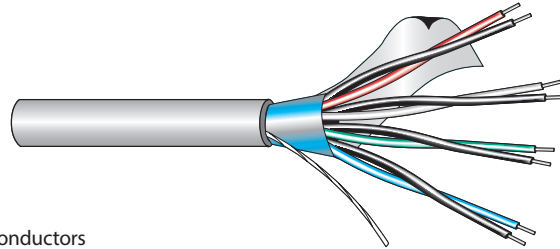

SPECIFICATIONS

SP FT4 UL

APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Solid tinned copper conductors

Insulation: SR-PVC

Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire

Outer Jacket: PVDC, grey

Temperature: -20°C to 105°C

Options: Stranded bare copper conductors

Aluminum or steel interlock armour and jacket

Other coloured outer jacket and constructions available upon request

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-631-2201	1	22	Solid	0.134	600	12	3
52-631-2202	2	22	Solid	0.202	600	28	3
52-631-2204	4	22	Solid	0.235	600	43	3
52-631-2206	6	22	Solid	0.267	600	55	3
52-631-2209	9	22	Solid	0.326	600	79	3
52-631-2215	15	22	Solid	0.388	600	118	3
52-631-2219	19	22	Solid	0.431	600	144	3

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice

*See page 32 for corresponding Colour Code Chart