


General Purpose Multi-Conductor

Overall Foil Shielded Plenum



SPECIFICATIONS

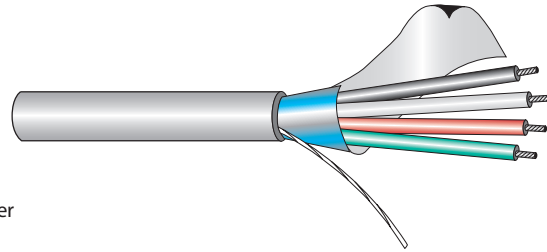

APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Stranded tinned copper
 Insulation: PVC
 Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire
 Outer Jacket: PVC, grey
 Temperature: 60°C
 Options: Stranded bare copper conductors
 Other coloured outer jacket and constructions available upon request

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-446-2202	2	22	7/30	0.133	300	12	1
52-446-2203	3	22	7/30	0.140	300	15	1
52-446-2204	4	22	7/30	0.152	300	18	1
52-446-2206	6	22	7/30	0.180	300	24	1
52-446-2208	8	22	7/30	0.194	300	31	1
52-446-2210	10	22	7/30	0.223	300	38	1
52-446-1802	2	18	7/26	0.180	300	22	1
52-446-1803	3	18	7/26	0.181	300	28	1
52-446-1804	4	18	7/26	0.198	300	36	1
52-446-1806	6	18	7/26	0.237	300	51	1
52-446-1807	7	18	7/26	0.237	300	57	1
52-446-1809	9	18	7/26	0.277	300	72	1
52-446-1602	2	16	19/29	0.201	300	31	1
52-446-1603	3	16	19/29	0.222	300	41	1

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
 Specifications are subject to change without prior notice

*See page 32 for corresponding Colour Code Chart