

General Purpose Multi-Conductor

Overall Foil Shield 105°C

SPECIFICATIONS



APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Stranded tinned copper conductors

Insulation: Semy Rigid (SR)-PVC

Drain Wire: Stranded tinned copper

Shield: Overall, 100% aluminum foil shield


Outer Jacket: PVC, grey

Temperature: -20°C to 105°C

Options: Stranded bare copper conductors

Aluminum or steel interlock armour and jacket

Other coloured outer jacket and constructions available upon request

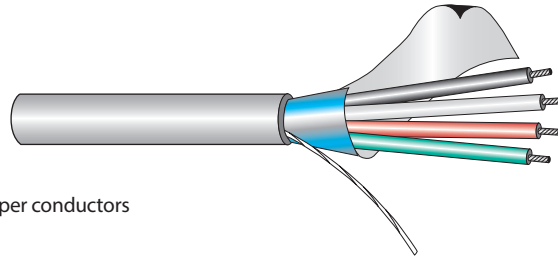

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-442-2403	3	24	7/32	0.132	600	11	1
52-442-2404	4	24	7/32	0.143	600	13	1
52-442-2405	5	24	7/32	0.151	600	21	1
52-442-2406	6	24	7/32	0.180	600	24	1
52-442-2407	7	24	7/32	0.180	600	26	1
52-442-2408	8	24	7/32	0.197	600	29	1
52-442-2409	9	24	7/32	0.206	600	32	1
52-442-2410	10	24	7/32	0.220	600	34	1
52-442-2415	15	24	7/32	0.247	600	41	2
52-442-2420	20	24	7/32	0.274	600	59	2
52-442-2425	25	24	7/32	0.326	600	70	2
52-442-2440	40	24	7/32	0.388	600	122	2
52-442-2202	2	22	7/30	0.135	600	16	1
52-442-2203	3	22	7/30	0.144	600	18	1
52-442-2204	4	22	7/30	0.158	600	23	1
52-442-2205	5	22	7/30	0.182	600	30	1
52-442-2206	6	22	7/30	0.198	600	31	1
52-442-2207	7	22	7/30	0.205	600	39	1
52-442-2208	8	22	7/30	0.213	600	36	1
52-442-2209	9	22	7/30	0.227	600	47	1
52-442-2210	10	22	7/30	0.247	600	42	1
52-442-2212	12	22	7/30	0.253	600	57	2
52-442-2225	25	22	7/30	0.362	600	91	2
52-442-2230	30	22	7/30	0.393	600	106	2
52-442-2250	50	22	7/30	0.487	600	198	2
52-442-2002	2	20	7/28	0.163	600	18	3
52-442-2004	4	20	7/28	0.188	600	30	1
52-442-2005	5	20	7/28	0.202	600	38	1