

## Low Capacitance Paired

### Individual Foil Shielded

#### SPECIFICATIONS




#### APPLICATIONS

- Computer
- Data requiring superior channel isolation

#### CONSTRUCTION

- Conductor: Stranded tinned copper
- Insulation: Polyethylene or polyolefin
- Outer Jacket: PVC, grey
- Individual Shield: Aluminum foil shield with stranded tinned copper drain wire over each pair
- Temperature: -20°C to 80°C
- Options: Stranded bare copper conductors
- Other coloured outer jacket and constructions available upon request

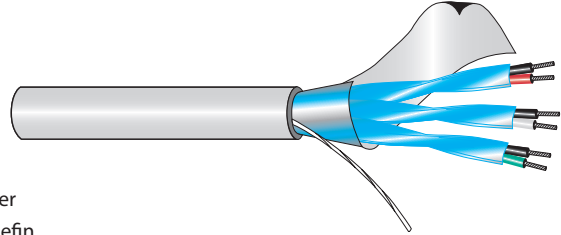

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-702-2402	2	24	7/32	0.228	150	27	3
52-702-2404	4	24	7/32	0.268	150	42	3
52-702-2406	6	24	7/32	0.307	150	57	3
52-702-2409	9	24	7/32	0.363	150	80	3
52-702-2412	12	24	7/32	0.404	150	102	3

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice

\*See page 32 for corresponding Colour Code Chart