


General Purpose Paired
Overall Foil Shielded Stranded



SPECIFICATIONS

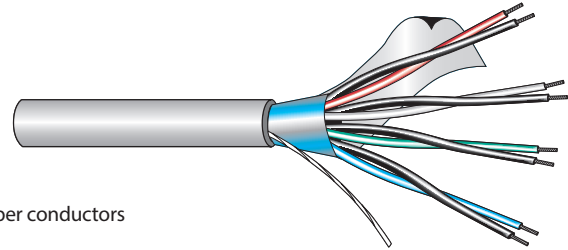

APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Stranded tinned copper conductors
 Insulation: SR-PVC
 Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire
 Outer Jacket: PVC, grey
 Temperature: -20°C to 105°C
 Options: Stranded bare copper conductors
 Other coloured outer jacket and constructions available upon request

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-644-2401	1	24	7/32	0.416	600	11	3
52-644-2402	2	24	7/32	0.195	600	21	3
52-644-2403	3	24	7/32	0.210	600	26	3
52-644-2404	4	24	7/32	0.229	600	36	3
52-644-2405	5	24	7/32	0.260	600	37	3
52-644-2406	6	24	7/32	0.264	600	41	3
52-644-2410	10	24	7/32	0.334	600	60	3
52-644-2412	12	24	7/32	0.350	600	83	3
52-644-2415	15	24	7/32	0.388	600	98	3
52-644-2425	25	24	7/32	0.485	600	132	3
52-644-2202	2	22	7/30	0.218	600	28	3
52-644-2203	3	22	7/30	0.231	600	31	3
52-644-2204	4	22	7/30	0.251	600	39	3
52-644-2206	6	22	7/30	0.286	600	52	3
52-644-2209	9	22	7/30	0.357	600	74	3
52-644-2212	12	22	7/30	0.388	600	110	3
52-644-2215	15	22	7/30	0.426	600	132	3
52-644-2219	19	22	7/30	0.472	600	161	3
52-644-2227	27	22	7/30	0.565	600	183	3
52-644-2002	2	20	7/28	0.238	600	36	3
52-644-2003	3	20	7/28	0.256	600	45	3
52-644-2004	4	20	7/28	0.285	600	57	3
52-644-2006	6	20	7/28	0.336	600	79	3
52-644-2009	9	20	7/28	0.393	600	112	3
52-644-2012	12	20	7/28	0.435	600	142	3
52-644-2015	15	20	7/28	0.496	600	183	3
52-644-1801	1	18	16/30	0.22	600	31	3