


## Filled Cables

Polyolefin/LLDP

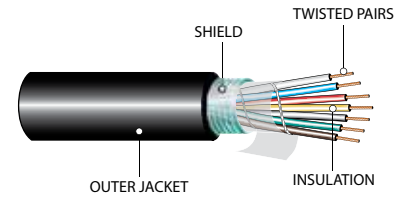

### SPECIFICATIONS

- 7 CFR 1755.890 (REA PE-89)

### CONSTRUCTION

- Conductor:** Solid annealed copper
- Insulation:** Dual layer- foamed Polyolefin surrounded by solid Polyolefin skin
- Shield:** Corrugated-copolymer coated tape
- Filling Compound:** ETPR filled compound
- Outer Jacket:** Linear low density Polyethylene (LLDPE), black
- Options:** Other sizes, colours and custom designs available upon request

Part Number	AWG Size		Approximate Diameter		Net Weight	
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM
13152-02-010	6	24	0.400	10.160	70	104
13152-04-010	12	24	0.460	11.684	100	149
13152-07-010	25	24	0.590	14.986	175	260
13152-09-010	50	24	0.720	18.288	290	432
13152-11-010	100	24	0.900	22.860	490	729
13152-13-010	200	24	1.200	30.480	900	1339
13152-14-010	300	24	1.400	35.560	1290	1920
13152-15-010	400	24	1.600	40.640	1700	2530
13152-16-010	600	24	1.900	48.260	2440	3631
13975-02-010	2	22	0.320	8.1000	45	65
13153-02-010	6	22	0.470	11.938	100	149
13153-04-010	12	22	0.540	13.716	140	208
13153-07-010	25	22	0.650	16.510	230	342
13153-09-010	50	22	0.830	21.082	400	595
13153-11-010	100	22	1.100	27.940	725	1079
13153-13-010	200	22	1.400	35.560	1330	1979
13153-14-010	300	22	1.700	43.180	1950	2902
13154-02-010	6	19	0.570	14.478	155	231
13154-04-010	12	19	0.660	16.764	230	342
13154-07-010	25	19	0.870	22.098	415	618
13154-09-010	50	19	1.030	26.162	655	975
13154-11-010	100	19	1.370	34.798	1225	1823

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.