


Individual and Overall Shielded 16AWG/14 AWG 600V XLPE/PVC

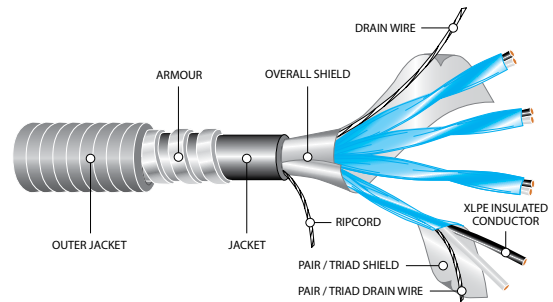

SPECIFICATIONS

- CSA C22.2 No. 239
- CSA C22.2 No. 174
- CSA C22.2 No. 38
- CSA FT4 (Vertical Tray Flame Test)

*refer to CE Code for details



CONSTRUCTION

- Conductor:** 7 strand tinned Class B concentric copper
- Insulation:** Cross-linked polyethylene (XLPE). Thickness: 0.030 in. (0.76 mm)
- Individual Shield:** Aluminum/polyester tape shield with 7 strand drain wire over each pair or triad
- Overall Shield:** Overall aluminum/polyester tape shield with 7 strand drain wire
- Jacket:** Flame-retardant Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Low-temperature (-40°C), flame and sunlight resistant Polyvinyl Chloride (PVC), grey
- Options:** Galvanized Steel Interlocked Armour (GSIA)
Polyvinyl Chloride (PVC) Insulation
Overall shielded or non-shielded cables available
Other coloured outer jacket and constructions available upon request

PAIRS

Part Number	No. of Pairs	Insulation Thickness (in.)	Approximate Diameter (Over)		Net Weight		Minimum Bend Radius (in.)
			Inner Jacket (in.)	Outer Jacket (in.)	LB/ MFT	KG/ KM	
C6-9124-1601-19	1	0.030	0.336	0.640	169	251	7.6
C6-9324-1602-19	2	0.030	0.396	0.701	221	329	8.4
C6-9324-1604-19	4	0.030	0.641	0.948	377	561	11.4
C6-9324-1606-19	6	0.030	0.766	1.109	522	777	13.3
C6-9324-1608-19	8	0.030	0.871	1.216	652	970	14.6
C6-9324-1612-19	12	0.030	1.051	1.398	851	1266	16.8
C6-9324-1616-19	16	0.030	1.165	1.533	1050	1563	18.4
C6-9324-1624-19	24	0.030	1.400	1.770	1400	2083	21.2
C6-9324-1636-19	36	0.030	1.651	2.024	2117	3150	24.3

14 AWG

C6-9124-1401-19	1	0.030	0.045	0.049	188	280	7.6
-----------------	---	-------	-------	-------	-----	-----	-----

TRIADS

Part Number	No. of Pairs	Insulation Thickness (in.)	Approximate Diameter (Over)		Net Weight		Minimum Bend Radius (in.)
			Inner Jacket (in.)	Outer Jacket (in.)	LB/ MFT	KG/ KM	
C6-9134-1601-19	1	0.030	0.355	0.638	188	280	7.6
C6-9334-1602-19	2	0.030	0.607	0.874	332	494	10.5
C6-9334-1604-19	4	0.030	0.704	0.964	453	674	11.6
C6-9334-1608-19	8	0.030	0.958	1.239	796	1184	14.9

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.

Specifications are subject to change without prior notice.

1 pair / triad overall shielded only. Single pair / triad overall shielded applies to multi-pairs / triads only.

* See pages 16-18 for corresponding connectors.