


## Fire Alarm Cable Non-Shielded, Non-Armoured Plenum, PVC, FT6

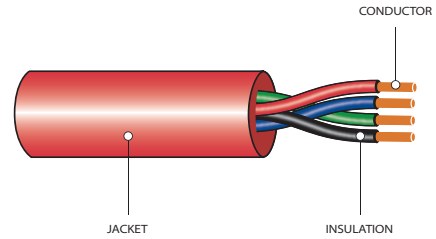

### SPECIFICATIONS

• CSA, FT6

\*Refer to CE Code for details



### CONSTRUCTION

**Conductor:** Solid Bare Copper

**Insulation:** Polyvinyl Chloride (PVC)

**Outer Jacket Material:** Polyvinyl Chloride (PVC)


**Cable Temperature:** 75°C

**Voltage:** 300V

**Options:** Other jacket colours, sizes and armours available upon request

Part Number	AWG Size	Number of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26317-02-030	18	2	Solid	0.008	0.008	16	24
26317-03-030	18	3	Solid	0.008	0.155	24	36
26317-04-030	18	4	Solid	0.008	0.175	29	43
26317-05-030	18	5	Solid	0.008	0.179	37	55
26317-06-030	18	6	Solid	0.008	0.194	44	65
26318-02-030	16	2	Solid	0.008	0.174	23	34
26318-03-030	16	3	Solid	0.008	0.178	32	48
26318-04-030	16	4	Solid	0.008	0.203	43	64

## Fire Alarm Cable Shielded, Non-Armoured Plenum, PVC, FT6

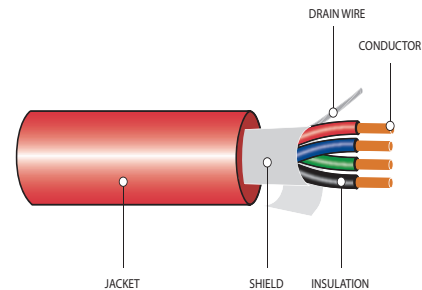

### SPECIFICATIONS

• CSA FT6

\*Refer to CE Code for details



### CONSTRUCTION

**Conductor:** Solid Bare Copper

**Insulation:** Polyvinyl Chloride (PVC)

**Shield:** 100% Aluminum Foil Shield

**Outer Jacket Material:** Polyvinyl Chloride (PVC)

**Cable Temperature:** 75°C

**Voltage:** 300V

**Options:** Other jacket colours and sizes. Armour is available upon request.

Part Number	AWG Size	Number of Conductors	Stranding	Approximate Diameter (in.)	Insulation Thickness (in.)	Net Weight	
						LB/MFT	KG/KM
26327-05-030	18	5	Solid	0.008	0.181	40	60
26327-04-030	18	4	Solid	0.008	0.190	37	55
26327-03-030	18	3	Solid	0.008	0.157	26	39
26327-02-030	18	2	Solid	0.008	0.166	23	35
26328-02-030	16	2	Solid	0.008	0.169	26	38