


Blasting Cable SOOW 600V EPDM/CPE

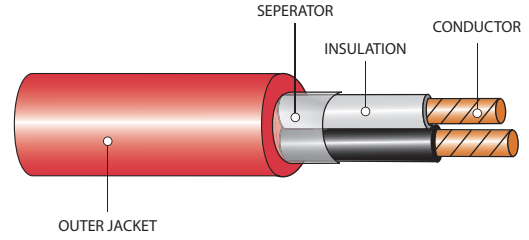

SPECIFICATIONS

- CSA FT2
- MSHA

*Refer to CE Code for details



CONSTRUCTION

Conductor: Stranded bare copper

Insulation: Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: Chlorinated Polyethylene (CPE), red

Options: Other sizes, colours and custom designs available upon request

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Copper Content		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM	LB/ MFT	KG/KM
01008-10-030	2	12	65/30	0.045	1.143	0.570	14.478	41	61	200	298
01010-13-030	2	10	104/30	0.045	1.143	0.625	15.875	62	92	252	375
02008-19-030	2	6	133/27	0.060	1.524	0.930	23.622	173	257	540	804

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

* Refer to CEC for Ampacity.