


Fire Alarm Cable Non-Shielded, Jacketed, Armoured

PVC, AIA/PVC

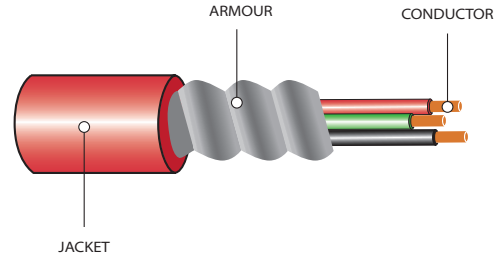

SPECIFICATIONS

- CSA FT4
- FAS 105

*Refer to CE Code for details



CONSTRUCTION

Conductor: Solid Bare Copper

Insulation: Polyvinyl Chloride (PVC)

Armour: Flexible Aluminum Interlocked Armour (AIA)

Outer Jacket Material: Polyvinyl Chloride (PVC)

Cable Temperature: -20 °C TO 105°C

Voltage: 300V

Options: Non armoured or steel armour available upon request

Part Number	AWG Size	No. of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26313-08-030AIA	18	8	Solid	0.015	0.560	166	247
26313-07-030AIA	18	7	Solid	0.015	0.540	152	226
26313-05-030AIA	18	5	Solid	0.015	0.500	164	244
26313-03-030AIA	18	3	Solid	0.015	0.510	180	268
26314-05-030AIA	16	5	Solid	0.015	0.517	125	186
26314-03-030AIA	16	3	Solid	0.015	0.467	147	219
26314-02-030AIA	16	2	Solid	0.015	0.517	125	186
26315-04-030AIA	14	4	Solid	0.015	0.540	165	246
26315-02-030AIA	14	2	Solid	0.015	0.556	156	232
26316-04-030AIA	12	4	Solid	0.015	0.590	192	286
26316-02-030AIA	12	2	Solid	0.015	0.554	177	263

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity

Non-shielded, Jacketed
Armoured