

Fire Alarm Cable Non-Shielded, Unjacketed, Armoured PVC, AIA

SPECIFICATIONS

- CSA FT4
- FAS 105

*Refer to CE Code for details



CONSTRUCTION

Conductor: Solid Bare Copper


Insulation: Polyvinyl Chloride (PVC)

Armour: Red Dyed Aluminum Interlocked Armour (AIA)

Cable Temperature: -20 °C TO 105°C

Voltage: 300V

Options: Silver colour and non armoured or steel armour available upon request

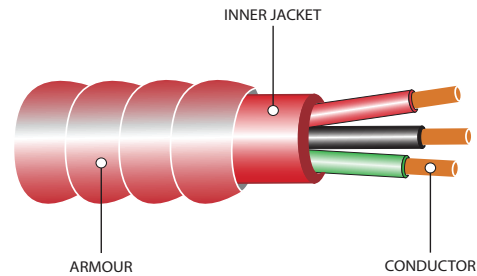

Part Number	AWG Size	Number of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26313-03-035RED	18	3	Solid	0.015	0.415	74	110
26313-04-035RED	18	4	Solid	0.015	0.420	81	121
26313-05-035RED	18	5	Solid	0.015	0.449	104	155
26313-08-035RED	18	8	Solid	0.015	0.460	132	196
26314-03-035RED	16	3	Solid	0.015	0.410	74	110
26314-05-035RED	16	5	Solid	0.015	0.421	94	140
26315-03-035RED	14	3	Solid	0.015	0.483	114	170
26315-05-035RED	14	5	Solid	0.015	0.490	147	219

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity