


Type SOOW 14AWG 600V

EPDM/CPE

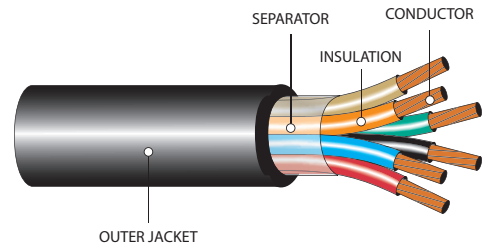

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

14 AWG

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
04003-01-010	5	14	41/30	0.045	1.140	0.645	16.260	269	400
04003-02-010	6	14	41/30	0.045	1.140	0.710	18.030	317	472
04003-03-010	7	14	41/30	0.045	1.140	0.755	19.180	347	516
04003-04-010	8	14	41/30	0.045	1.140	0.810	20.570	430	640
04003-06-010	10	14	41/30	0.045	1.140	0.875	22.230	427	635
04003-08-010	12	14	41/30	0.045	1.140	0.900	22.860	493	734
04003-10-010	14	14	41/30	0.045	1.140	1.000	25.400	601	894
04003-12-010	16	14	41/30	0.045	1.140	1.030	26.160	678	1009
04003-16-010	20	14	41/30	0.045	1.140	1.155	29.340	806	1199
04003-24-010	24	14	41/30	0.045	1.140	1.260	32.000	1003	1493
04003-26-010	30	14	41/30	0.045	1.140	1.335	33.970	1153	1716

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity