


Type SOOW 10AWG - 2AWG 600V EPDM/CPE

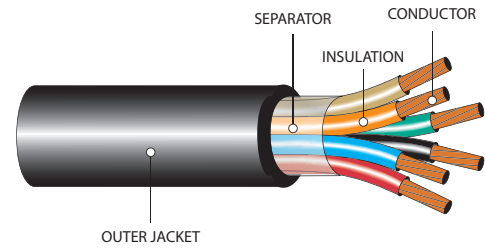

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

10-2 AWG

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01010-14-077	3	10	104/30	0.045	1.140	0.660	16.760	320	476
04033-01-010	5	10	104/30	0.045	1.140	0.770	19.560	472	702
04033-02-010	6	10	104/30	0.045	1.140	0.875	22.230	565	841
04033-03-010	7	10	104/30	0.045	1.140	0.900	22.860	552	821
04033-04-010	8	10	104/30	0.045	1.140	0.935	23.750	682	1015
04033-07-010	10	10	104/30	0.045	1.140	1.020	25.910	758	1128
04033-08-010	12	10	104/30	0.045	1.140	1.070	27.180	871	1296
04033-12-010	16	10	104/30	0.045	1.140	1.230	31.240	1147	1707
04033-16-010	20	10	104/30	0.045	1.140	1.325	33.660	1445	2150
04034-01-010	5	8	133/29	0.060	1.520	1.030	26.160	700	1042
04034-05-010	5	6	133/27	0.060	1.520	1.200	30.480	1015	1510
04034-09-010	5	4	133/25	0.060	1.520	1.365	34.670	1419	2112
04034-13-010	5	2	133/23	0.060	1.520	1.580	40.130	2066	3074

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity